

#### COMPANY SURGEONS

Dr. Abbott Skinner, Chief Surgeon	St. Paul
*Dr. Charles T. Eginton, Assistant Ch	ief SurgeonSt. Paul
Dr. R. K. West	Cut Bank, Montana
Dr. S. D. Whetstone	Cut Bank, Montana
Dr. Edward L. King	Browning, Montana
Dr. T. B. Moore	Kalispell, Montana
Dr. W. F. BennettC	olumbia Falls, Montana
*Dr. J. B. Simons	Whitefish, Montana
Dr. James E. Murphy	Whitefish, Montana
Dr. Robert D. MacKenzie	Libby, Montana
Dr. William T. Matthews	Troy, Montana
*Dr. R. M. Bowell	Bonners Ferry, Idaho
Dr. Franz H. Siemsen	Sandpoint, Idaho
Dr. R. B. Morrow	Newport, Wash.
*Dr. E. B. Coulter	Spokane, Wash.
Dr. Robert J. Albi	Hillyard, Wash.
Dr. C. M. Canning	Colville, Wash.
*Dr. G. R. Callbeck	Nelson, B. C.
*Designates also Examining Surgeon.	

### OPHTHALMIC SURGEONS

(Eye Dosters)

Dr.	H. D.	Hug	ggins		Kalispell,	Me	ntana
Dr.	Philip	B.	Gree	00	Spoka	200	Wash.

D. H. CARPENTER, Chief Dispatcher.

D. E. PARKS. Trainmaster.

F. H. MOORE, Trainmaster.

P. A. FREUEN, Trainmaster.

R. A. HARRIS, Trainmaster.

O. E. FISHER, Asst. Superintendent.

Scanned from the Dean Ogle Collection

# GREAT NORTHERN RAILWAY COMPANY

# **KALISPELL DIVISION**

# TABLE 93

EFFECTIVE 12:01 A. M. MOUNTAIN TIME

AND

PACIFIC TIME

Tuesday, September 6, 1960

MOUNTAIN TIME GOVERNS FIRST, AND THIRD SUBDIVISIONS.

PACIFIC TIME GOVERNS SECOND, FOURTH, FIFTH, SIXTH, SEVENTH, EIGHTH AND NINTH SUBDIVISIONS.

H. M. SHAPLEIGH, Superintendent.
C. M. RASMUSSEN, General Manager.
A. W. CAMPBELL,
General Superintendent Transportation.
Printed in U.S.A.

2	W	ES'	TWARI	)				FIRST	S	UBI	DIVIS	ION				I	ASTW.	ARD
	Cap		FII	RST CL	AS:	s		MOUNTAIN TIM	E	•			FIF	RST CLA	SS	SEC	OND CL	ASS
• Numbo				31		27	we from ank	Time Table No. 9  Effective September 6, 1966		raph Call	nce from	SIGNS	32	28		494	490	492
Storifo	3	Offer Transfer		Delly	-	Daily	Distance for Cut Bank	STATIONS		Tolegraph	Distance Troy		Daity	Daily		Dally	Dally	Dally
1087	130	265		L 3.08p	n L	5.50Am	0.00	ĔCUT BANK★.	)	Cī	260,88	BDNIK PRXW	A 9.25Am	a 6.05Pm		▲ 3.55Pm	A 1.35Am	A 7.50Am
1095	••••	30		3.20		6.02	9.60	SUNDANCE	\ <b>\alpha</b>	••••	251.27	P	9.12	5.52		3.40	1.17	7.35
1112	109	279		3.37		6.22	26,24		}_	87	234.63	DPY	8.52	f 5.32		3.15	12.47	7.10
1120	127	180		3.48	s	6.37	33,53	BROWNING	\{E	80	227,34	DNF	8.44	s 5.22		3.00	12.32	6.59
1125	183	15		3.58		6.47	38,92	TRIPLE DIVIDE	.]		221.95	P	8.38	5.10		2.50	12.21	6.47
1133	95	126		4.07	f	7.05	46.87	GLACIER PARK	:	MD	214.00	DNPYW	8.28	f 5.00		2.35	12.01Am	6.12
1136	112	10		4.11		7.10	49.58	2.71 BISON			211.29	•	8.23	4.51		2.27	11.55	6.07
1141	116	10		4.15		7.15	52,70	3.12			208.17	•	8.18	4.46		2.20	11.48	6.01
H	E 98 W125	31		4.25		7.27	58.95	6.25		SAA	201.92	DNPIYXW	8.09	4.37		2.10	11.33	5.45
1153	E 60	9		4.36		7.39	65,75	6.80			195.12	P	7.51	4.22		1.50	11.18	5.20
					-	32		7.50					7.33					
1161	"E115	57		4.51		7.55	73,25	E NIMROD		•••••	187.62	IP KDNP		4.05	· • • • • • • • • • • • • • • • • • • •	1.20	10.48	4.55
	W136	109		4.58	f		77.15	】ESSEX★ 5.66		SX	183.72	BOYXW	7.25	f 3.57	• • • • • • • • • • • • • • • • • • • •	1.10	10.35	4.45
1171	E116	•••••		5.07		8.15	82.81	PINNACLE	·	•••••	178.06	IP .	7.15	3.44	• • • • • • • • • •	12.55	10.05	4.30
1181	W 99	14		5.23	-	8.35	93.02		:	HA	167.86	- IVP	7.00	3.27		12.35	9.25	4.10
1192	156	91		5.40	f	8.55	103.68	BELTON.★		88	157.20	DNPW	6.44	f 3.09		12.15Pm	9.05	3.50
1200	64	75		5.50	f	9.07	111.56			CM	149.32	DP	6.32	t 2.54		11.59Am	8.45	3.35
\$204		122		5.57		9.14	115.96		.		144.92	P 3	6.26	2.44		11.49	8.37	3.25
1207	83	214		6.02	s	9.23	118,77	COLUMBIA FALLS:*	-	C	142,11	WAXACNO	6.22	s 2.40		11.45	8.30	3.18
1210		46		6.06		9.27	121.70	HALF MOON			139,18	P KRONWP	6.18	2.31		11.40	8.20	3.10
1215	Yord	1720		A 6.15	A	9.35 9.45	126.40	.wHITEFISH★.	ABS	Wr	134.48	BOXZI		L 2.25 A 2.15		L 11.30 A 10.35		L 3.01 A 1.40
<b> </b>				L 6.20	- L	9.45		5.39	۱*	<u> </u>			A 6.05	A 2.15		A 10.35	A 0.13	A 1.40
1220	151			6.27		9.53	131.79		.		129.09	₽	5.55	2.06		10.15	5.55	1.25
1227	196	15		6.36		<b>1</b> 0.01	138,21				122.67	P	5.48	1.58		10.01	5.45	1.15
1232	E 70 W 70	26		6.42	f	10.10	143.67		:	KY	117.21	DP	5.41	f 1.49		9.45	5.35	1.05
1238	141	17		6.49	1	10.18	149,44	5.77 RADNOR	.		111,44	P	5.35	1.40		9.30	5.20	12.55
1245	W106 E113	17	• • • • • • • • • • • • • • • • • • • •	6.57			156,51	7.07 STRYKER.★		SY	104.37	DNPYW	5.28	1 1.31		9.15	5.08	12.40
1251	136	15		7.03	ŀ	10.36	162.48	5.97			98.40	P	5.21	1 1.22		9.05	4.54	12.25
11	130	40		7.08		10.46	167.10	4.62	.	FR	93.78	DPW		f 1.13		8.50	4.45	12.10Am
1 t	127	76		7.14	1	10.55	173.02	5.92	.		87.86	PI	5.07	1.03		<b>8.3</b> 0	4.37	11.50
					-			5.76	- I									
1267	151 W130	59		7.20		11.05	178.78	8.88	١	KA	82,10	DNPW	4.59	s 12.54	•••••	8.05	4.30	11.35
11	W130 E170			7.32	f	11.19	187.66	10.88	١.	RD	73,22	DNPYW	4.48	f 12.40	• • • • • • • • • •	7.40	415	11.20
11	128	10		7.44		11.31	198.54	11.06			62.34	P	4.35	12.26	• • • • • • • • • • •	7.20	3.57	11.05
!!	138	5		7.56	f	11.44	209.60	4.95	١.		51.28	P	4.23	12.14		<b>7.</b> 01	3.20	10.50
1287	128	4		8.01	_	11.50	214.55		:	VR	46.33	DNPW	4.17	12.08Pm	• • • • • • • • • • • • • • • • • • • •	<b>6.</b> 50	3.00	10.42
1295	139	<b> </b> .		8.11		<b>11</b> .59	222.37	7.82 YARNELL	.	<b></b>	38.51	P	4.09	11.59		6.35	2.50	10.30
1308	152	3		8.27		12.13 <sub>Pm</sub>	235,48	13.11 RIPLEY		ļ. <b></b> .	25.40	P	3.54	11.44		6.10	2.35	10.12
1313	265	175		8.35	s	12.24	242.70	7.22	.{	СК	18.18	DNPZW	3.45	s 11.36		5.55	2.10	10.00
	170			8.50	_	12.36	25271	.KOOTENAI FALLS.	_(e		7.17	P	3.31	11.18		5.35	1.45	9.45
11	178 288	697	<b>.</b>	i .		12.45Pm	253.71	7.17	1	UX	0.00	KRDNP BXIYW	1	L     .   OAm		L 5.20Am		
	===	<u> </u>		-	<b>#</b>  4		200.00	Time Over Subdivision						6.55		10.35	12.05	10.20
<b>II</b> —	<u> </u>	<u> </u>	<u> </u>	5.57 43.84		6.55 <b>37.71</b>	<u> </u>	Average Speed Per Hor	*	1	1	<u> </u>	6.05 43.20	37.71	<u> </u>	24.41	21.45	25,24

Westward trains are superior to eastward trains of the same class.

SEE ADDITIONAL SPECIAL INSTRUCTIONS PAGES 6 THROUGH 13.

See page 9 and 10 for CONDITIONAL STOPS.

W	/ES	ΓWA	RD			4.1	SE	COND	SUBD	IVI	SION				E	ASTWA	RD 3
		ar actry		FIRST	CLASS			Time	Table					FIRST	CLASS		SECOND
Station Numbers	•		1 8.P. & & No. 1	31	45 s. P. & S. No. 3	27	once from	Effective 5	. 93 tive er 6, 1960 IC TIME		Distance From Fort Wright	SIGNS	46 s. p. a.s. No. 4	28	2 8. P. & S. No. 2	32	492
- D	25	Par Track	Dally	Dally	Daily	Dally	Distan	STAT	TIONS	100	For		Dally	Daily	Daily	Daily	Daily
1332	288	697		L 8.05Pm		L 11.50Am	0.00	TRO	Y.★	ux	142,09	RDNPBK				A 2.20A	A 7.35Pm
1340	142	19		8.16		11.59	4.69	7.0	2	••••	135.40	P		9.55		2.07	7.24
1347	128	24		8.30		12.10pm	13,71	13.29		****	128,38			9.44		1.57	7.10
1360	132	10		8.57		12.30	27.00	GROSSI			115.09	DNPVY		9.24		1.30	6.40
1364	119	183		9.05		s 12.38	31.31	BONNERS F	ERRY.	BY	110.78	JW	5	9.17		1.24	6.30
1374	119	39		9.18		f 12.54	42.68	BAPL	E8.女	NA	99.41	DPW	1	9.02		1.11	6.07
1383	130	32		9.26		f 1.03	50.07	ELMI	RA		92.02	P	1	8.52		1.03	5.52
1390	116	11		9.33		f 1.10	56.89	GOLBI		••••	85,20	P	1	8.44		12.56	5.39
1398	105	395		9.41		s 1.21	45,23	8.3	OINT.	8	76.86	DNPYY	s	8.34		12.47	5.24
1407	70	13		9.50		1.30	73.58	8.3 WREN	5		68,51	Р		8.20		12.38	5.09
1410	130	15		9.56		f 1.35	78.58	LAGLE	0		63,51	P				12.33	5.00
1416	71	42		10.02		1.40	83.30	YHAI	2		58.79	P		8.08		12.28	4.52
								3.5		-							
1420	70	122		10.06		s 1.45	86.83	PRIEST	7	NC	55.26	DNPOV	s	8.04		12.24	4.46
1427	122	247		10.15		s 1.57	73.40	7.8	0	NR	48,69	W	s	7.54		12.16	4.34
1486	129	15		10.23		2.06	101.20	6.5	9	••••	40.89	P		7.41		12.06A	
1442	118	25		10.31		214	107.79	GAMD		••••	34.30	P		7.32		11.55	4.08
1449	123	32		10.39		2.23	115.09	7.3 MILI	N		27.00	P		7.23		11.45	3.54
1460		53		10.50		2.35	125.44	10.3	N	SF	16,63	DNPXA		7.11		11.32	3.35
1464		164		10.55		2.40	130.05	4.5	9		12,04	P		7.05		11.26	3.25
		_		11.01				HILLY	ARD.★	-		BRKDNPT				11.20	
1469	•••••	3218				f 2.45	134,58		0	HU	7.51	WOIXZY	1	7.00			L 3.15Pm
1472	•••••			11.08		2.53	138.18	5	R. Gross'g	****	3.91	PIMVX		6.50		11.10	
1473		609	L   1.59Pm	A   1.15 L   1.45	L 9.45Pm	A 3.00 L 3.30	139.35	.8POK	ARE. A.	Q	2.74	RKDNP BXVZW	A 6.00Am A	6.45	A 10.05Pm	L  1.05 A  0.35	
1477	40	65			2	A 3.35Pm	142.09	FORT	WRIGHT.	FW	0.00	IDNPYXV	L 5.5   Am L		45	L 10.28P	
14//			A 12.04AII	A 11.50mm	A J.JJFIII	אורכייר א	142.07				0.00		D J.JIMIL	0.10/0	L 0.00[	1 (0.20)	
	==	==						-		=						====	sief5.
-			.05 32.88	3.45 37.89	18.44	3.45 37.89			Subdivision lead Per Hour				18.26	3.55 36.70	.10 18,44	3.52 36.75	4.20 31.10
WE	STW	ARI	THI	RD SU	BDIVIS	ION E	ASTV	VARD	WES	TV	VARD	FOU	RTH SU	BDIV	ISION	EAST	WARD
1					IN TIME							1					1
5	Capac	diy	_	Time '						Caj	acity		Time Tat			- 4	
dmp	1	To Bo	Poli	No.		3	40	SIGNS			1 8	E	ffective Sept			1 3	SIGNS
8			Effec		mber 6, 19	ee datable	9 5 6		54	5	1 1 2	星	PACIFI	C TIME	1	15 8	
Staffon Nembers	Siding	Tracks	Effec	STAT		- 8	Distance Somers		Shorton Nemb	Sadh	Other Tracks Distance	Port.	STAT	IONS		T BO	
-	i						1 1	BJ	KV26	,	15 0.	00	PORT	0498.0	1.	25.95	İ
	• • • • • • • • • • • • • • • • • • • •			5.4		CF	24.86	RDNPYX	KV17			00	OPE.	LAMP		6.98	
WB 5	••••			KALIS	6		19.38	BRDNP	EV 8	••••			9.	38		7.57	
WB 14			.34	10.	52	K 10.52 JWYXZ RV 1 15 18.38											
WB25		Yard 24	.86	SOM			0.00	BDPX	1364		148 25.		BONNER	56		0.00 BY	BATA
				Time Over Spe					1004		140 20.	-	JANEA	LINN		0,00	5134

Westward trains are superior to eastward trains of the same class on Second, Third and Fourth Subdivisions. SEE ADDITIONAL SPECIAL INSTRUCTIONS PAGES 6 THROUGH 18.

Time Over Subdivision Average Speed Per Hour.

4 W	VES	TW	ARD	FIFTH SUBDIV	ISI	ON	EAST	WARD	WE	ST	WAI	RD SI	ХТН	SUBDIVISION	E	ASTW	/ARD
		ar pacity	SECOND CLASS	Time Table No. 93	Calls			SECOND CLASS		Cap	ar	SECOND CLASS		Time Table No. 93	Calls		SECOND CLASS
Station Numbers	Stdings	Other	703	Effective September 6, 1960 PACIFIC TIME	Telegraph C	Distance from Dean	SIGNS	704 Mon., Wed.	Station Numbers	Sidings	Other	393 Mon., Wed.	Distance from Kettle Fails	Effective September 6, 1960 PACIFIC TIME	Telegraph Co	SIGNS	394
ซีรี	ऊँ	οĔ	and Sat.	STATIONS	Ē	ãå		and Friday	S X	Sid	9º	and Fri	25	STATIONS	1	ORKDNB	Mon., Wed. and FrL
SA 186	••••	••••	L 6.00Am	NELSON	ВС	185.80	RDNWP	A 3.20pm	SA 82	74	222	L 5.00Am	0.00	KETTLE FALLS	MF	JYXPZ	A 4.10Pm
	BET	NEEN		JCT. AND NELSON				BY	SD 5	0	106	5.20 5.45	12.09	WEST KETTLE FALLS . 7.39 BOYDS	•	P	3.45 3.15
SA 181	0	0	L 6.30Am	TROUP JUNCTION		180.32	RYPV	A 2,45Pm	SD 17	0	31	6.05	17.48	BARSTOW			2.55
SA 176	0	24	6.55	SOUTH NELSON		175.50		2.10	SD 22	0	31	6.30	22.71	DULWICH	••••		2.40
SA 166	0	15	7.40	10.11 <b>HALL</b>		165.39		1.25	SD 29	0	12	7.00	28.59	<b>GOLDSTAKE</b>			2.10
SA 159	0	12	8.05	7.14 YMIR		158.25		12.57	SD 35	0	18	7.30	34.66	LAURIER, WASH		P	1.50
SA 155	0	9	8.20	BOULDER MILL		153.90		12.40	SD 46 SD 47	0	5	8.15 8.20	46.01 47.47	GRAND FORKS, B. C 1.46 GRAND FORKS JCT	••••	yv	1.10
SA 152	0	75	9.00	<b>SALMO</b> 2.73	SI	150.61	D	12.30	SD 47	0	18	8.30	49.12	DANVILLE, WASH		P	12.55
SA 148 SA 145	0	15	9.10 9.25	ERIE. 2.87 MEADOWS	•••••	147.88		12.05Pm				9.05		10,40			
SA 440	0	7	9.55	4.92 PARKS		140.09		11.35	SD 59 SD 65	0	62 33	9.05	59.52 65.59	6.07 MALO	••••	P	12.15Pm 11.55
				4.76			-		SD 72	0	18	9.40	72.13	POLLARD			11.35
SA 136 SA 130	0	33 15	10.45	FRUITVALE 5.31 COLUMBIA GARDENS		135.33		11.10	SD 76	0	34	9.50	75.81	TORBOY			11.20
SA 127	0	34	11.40	3.84 WANETA, B. C		126,18	P	10.20	SD 81		75	A 10.10Am	80.72	REPUBLIC	Z	BRKDYW	L 11.00Am
SA 126	0	39	11.50	BOUNDARY, U. S		124.07		10.05				5.10		Time Over Subdivision			5.10
SA 116	60	89	12.40Pm	NORTHPORT	NP	115.26	PDYW	9.30		-		15.62		Average Speed Per Hour			15,62
SA 109	0	37	1.10	8.27 MARBLE		106.99		8.25	We	stwa	ard tr	ains are	superio	or to eastward trains o	of th	e same	class.
SA 107	42	0	1.20	1,23 <b>DOLOMITE</b>		105.76	P	8.20									
SA 96	0	16	1.55	BOSSBURG		95.52		7.50	WIE	TI	ZAD	D CEV	TATA	TI CHIDDINICIOI	T T	ACOT	ZADD
SA 93 SA 82	36	310	2.10 A 2.50 <sub>Pm</sub>	EVANS	MF	92.14	RKDNW BYXOJPZ	7.35 L 7.00 <sub>Am</sub>	MES	TN	AK	ISECOND	FNI	H SUBDIVISION	N E		SECOND
			A Z.JOJIII	5.31 PALMERS	mi		BIAOJFE	L 1.00Am			Car	CLASS		Time Table No. 93	=		CLASS
SA 77 SA 73	0	13		PALMERS 3.17 COLVILLE		76.43 73.26					<u> </u>	95	kane	200 -1	h and Colls	SIGNS	96
SA 67	40	5		6,69 ARDEN	VD.	66,57	PD		Station	100	- 5	Daily	Distance from Spokane	September 6, 1960 PACIFIC TIME	Telegraph Telephone	SIGNS	Daily
SA 59	0	17		7.19 ADDY		59.38			SZ	Sidings	Other Tracks	Except Sun.	for	STATIONS	12		Except Sun.
SA 50	81	149		9.07 CHEWELAH	СН	50.31	PDXZ		SBO			L 8.00Am	0.00	SPOKANE	DS	DNKORY XZVB	A 5.20Pm
SA 43	80	63		7.71 VALLEY	VY	42.60	PDY		SC 2	0	117		1.86	N.P. CROSSING		VM	
SA 38	0	30		5.26 GRAYS 3.41		37.34	P		SC 5	0	4	8.15	4,40	PARKWATER	••••		5.01
SA 34	0	18		CLINE 1,25		33.93			SC 6	27	0	8.20	5.82	ORCHARD AVE	••••		4.55
SA 33	39	17		SPRINGDALE	•••••	32.68	P		SC 7 SC 13-B	0	20	8.25 9.10	6.98	6,06 GREENACRES		X	<b>4.50 4.30</b>
SA 25	40	5		LOON LAKE		24.55	P		SC 19	18		A 9.30Am	18.29	SPOKANE BRIDGE		٧	L 4.10Pm
SA 18	0	36		CLAYTON 5,28		17.76	P						WEEN C	12.23			
SA 13	50	49 25		3.60 DENISON	DE	12,48	PDX			C	M. ST.	P. & P. RY.	TIME TAE	POKANE BRIDGE AND GIBBS ILE AND SPECIAL INSTRUCTIONS	S WIL	L GOVERN	
SA 4	40	0		5.22 WAYSIDE		3.66	P		SD 31	0	57	L 10.30Am	30,52			VZX	A 3.00Pm
1460		62		3.66 DEAN	SF	0.00	JDNX		SC 32			A 10.50Am	31.97	COEUR d'ALENE	CA	PVZW	L 2.50Pm
			8,50	Time Over Subdivision				8.20				2.50 11,28		Time Over Subdivision Average Speed Per Hour			3.30 9.13
			11.78	Average Speed Per Hour				8.20 12.49	1	Vest	ward	trains are	supe	rior to eastward trains	of t	he same	class.
We	stwa	rd tr	aine are	superior to eastward	train	s of t	he same	class.									

SEE ADDITIONAL SPECIAL INSTRUCTIONS PAGES 6 THROUGH 13.

# WESTWARD EIGHTH SUBDIVISION EASTWARD

	Cap	ar acity	Time Table No. 93	from	Calls	
a seed	8	1-8	Effective September 6, 1960 PACIFIC TIME	Distance fro Spokane	relegraph	SIGNS
55.2	8	Tracks	STATIONS	Spe	12	
88 90		42	Moscow	96.05	MO	BRKDYXVW
\$B 82 <sub>.</sub>	0	18	vioLA	88.17		
8B 76	,	105	PALOUSE.	81.57	PA	DYV
88 71	0	10	QRINNELL	76.65		
88 69	0	11	LADOW	74.72		
			N. P. & U. P. R. R. CROSSINGS	71.00		A
88 65	16	22	0.36 GARFIELD4.06	70.64	GF	DW
\$B 61	0	•	CRABTREE	66.58		
8B 57	0	18	3.48 <b>SOKULK</b>	63.10	•••••	
	•••••	•••••	N. P. R. R. CROSSING	59,50	• • • • • • • • • • • • • • • • • • • •	A
80 53	11	57	U. P. R. R. CROSSING 0.62 OAKESDALE	59.46 58.84	KA	DV A
88 50	0	13	3.22 	55.62		
88 45	0	20	FAIRBANKS	50.94		
88 40	25	31	SPRING VALLEY	45,71		KOYK
88 84		40	WAVERLY	39.73		
88 30	0	0	WEST FAIRFIELD	3479		
	••••	••••	2.60 <b>U. P. R. R. JUNCTION</b> 32.33	34.19		٧

BETWEEN U. P. R. R. JOT. AND N. P. CROSSING U. P. R. R. TIME TABLE AND SPECIAL INSTRUCTIONS WILL GOVERN.

8C 2	°	117	1.86	1.86	•••••	AW
OPE	RATIO	N BET	WEEN N. P. CROSSING AND SPOKANE IS OVER	SEVENTI	I SUBDIV	ISION.
88 0			spokane	0,00	D8	DNKORYX ZVBW
			Time Over Subdivision Average Speed Per Hour			

Westward trains are superior to eastward trains of the same class.

# WESTWARD NINTH SUBDIVISION EASTWARD

	Cap	or acity	Time Table No. 93	15	# 5	
. 5	8	2.0	Effective September 6, 1960 PACIFIC TIME	nece from	graph	SIGNS
11	8	40 pt	STATIONS	Distance Spring	1 2	
W77		40	COLFAX	3674	co	YKDW
W45	30	25	STEPTOE	24.57		•••••
Wee	0	29	5.00 CASHUP	19.57		
W55	0	28	THORNTON	15.36		
W46	10	29	9.59 <b>ROSAL</b> IA	5.77	RO	DVW
88 40	25	31	SPRING VALLEY	0.00		OYED
			Time Over Subdivision Average Speed Per Hour			

Westward trains are superior to eastward trains of the same class. SEE ADDITIONAL SPECIAL INSTRUCTIONS PAGES 6 THROUGH 12.

# SPEED TABLE

Time Min.	Per Mile Sec. I	Miles Per Hour	Time Min.	Per Mile Sec.	Miles Per Hour
	46	78.3	1	18	46.2
	47	76.6	1	20	45.0
	48	75.0	1	22	43.9
	49	73.5	1 1 1 1 1	24	42.9
	50	72.0	1	26	41.9
	51	70.6	1	28	40.9
	52	69.2	1	30	40.0
	52 53	69.2 67.9	1	33	40.0 38.7
	54	66.7	1	36	87.5
	55	65.5	1	39	36.4 35.8
	56	64.3	1	42	85.8
	57	63.2	1	45	34.8
	58	62.1	ī	50	32.7
	59	61.0	1	55	31.8
1	0	60.0	2	_	30.0 27.7
ī	1	59.0	2	10	27.7
ī	2	58.1	2	20	25.7
1	3	571	2	30	24.0
ī	4	56.3	2	40	22.5
ī	5	55.4	3		20.0
	6	56.3 55.4 54.5	3	30	20.0 17.1
1 1 1	7	53.7	4		15.0
ī	Ŕ	52.9	5		12.0
	1 2 3 4 5 6 7 8 9	53.7 52.9 52.2	6		10.0
ī	10	51.4	7		8.6
1	12	50.0	8		7.5
ī	14	48.6	11112222233456789	_	6.7
1 1 1 1	16	47.4	10		6.0

# WATCH INSPECTORS

Franklin P. Wheeler	Kalispell
Joseph Z. Gerber	Whitefish
R. C. Wickstrom Jewelry Store	Bonners Ferry, Idaho
A. F. Benson	Newport, Wash.
H. J. March	Washington St., Spokane, Wash.

# SPECIAL INSTRUCTIONS

# **ALL SUBDIVISIONS**

#### 1. SPEED RESTRICTIONS GENERAL.

The following speed limits apply to trains and engines operating under the conditions outlined, unless rules or conditions require a further reduction.

- 50 MPH-Diesel engines light or with caboose only.
- 35 MPH—Trains or engines on main routes, actuating the points of spring switches: Trains or engines thru No. 20 turnouts at following locations:

Ends of double track.

East and west siding switches at:

Browning Ripley Naples
Triple Divide Kootenai Falls Colburn
Belton Troy Sandpoint
Stonehill Yakt LaClede
Ural Leonia Scotia

Volcour

East switch eastward siding Essex. East siding switch Vista. Fortine.

West siding switch Rising Wolf, Libby, Newport.

West yard lead switch Whitefish. SP&S Junction switch Fort Wright.

- 30 MPH—On Main lines, when handling following equipment in trains, not in actual service but on own wheels: derricks, cranes, pile drivers, Jordan spreaders, shovels, wedge plows, scale test car, also ore cars series 80000 thru 94250 and air dump cars X-2000 thru X-2096, X-7000 thru X-7049 when such cars are loaded with ore or gravel.
- 25 MPH—Trains handling logs; Trains or engines moving in facing point direction at spring switches without facing point lock; Trains or engines thru No. 15 turnouts at following locations:

East and west siding switches at Stryker, Elmira. West siding switch tobacco.

- 20 MPH—Train handling the following equipment on Branch Lines or on 6 degree or sharper curves of Main Lines: scale test car, ore cars series 80000 thru 94250, air dump cars X-2000 thru X-2096, X-7000 thru X-7049 when such cars are loaded with ore or gravel.
- 15 MPH—Trains handling the following equipment on Branch Lines or on 6 degree or sharper curves of Main Lines: derricks, cranes, pile drivers, Jordan spreaders, shovels and wedge plows.
- 15 MPH—Trains or engines moving thru interlockings against the current of traffic on double track; Trains or engines thru all other turnouts, except equilateral turnouts, and those shown previously in this item.
- 1(a). Rule 240 W of the Consolidated Code of Operating Rules is modified to permit handling Great Northern cars 60276 through 60279, 61500 through 61524 and 61000 through 61009 in passenger trains at passenger train speeds.

### 2. MOVEMENT OF ENGINES DEAD IN TRAINS.

Engine 2350 must be handled on rear of train.

Single unit diesel engines moving dead in freight trains are to be handled not less than (5) cars, or more than (15) cars from road engine. Additional units are to be separated by not less than (5) cars. Multiple unit groups, not exceeding (4) units, all equipped with alignment control couplers moving dead in freight trains, are to be handled not less than (5) cars from road engine. Additional groups or single units are to be separated by not less than (5) cars.

Following speed restrictions must be observed when towing engines dead in trains,

MAXIMUM SPEED ENGINE NUMBER	
50 MPH1 thru 12, 14, 15, 16, 24 thru	1 28,
75 thru 170.	
79 MPH	280,
281, 350 thru 365, 500 thru	512,
679, 680.	
65 MPHAll other engine units not sl	ıown

3. Except at points where it is necessary to classify trains, open cars loaded with poles, piling, lumber, timber, pipe, or other lading which might shift, should be placed as close as possible to the head end of train, but not next to engine, caboose, occupied outfit car or passenger car. Loaded trailer-on-flat cars are not included in this category. In double track territory, trains handling such cars must use extreme care to avoid slack running in or out when passing or being passed by other trains. In single track territory, trains handling such cars must be at stop when on siding or other track to meet or be passed by other trains, except when have more cars than siding will hold, it is permissible for such trains to pull by each other at restricted speed.

Loaded dump cars should not be handled on double track after dark, but if necessary to do so, close watch must be maintained by members of the crew, and if a car dumps its load, train must be stopped at once and protection provided as prescribed by the rules.

3 (a). Trains handling flat or skeleton cars loaded with logs will not exceed 10 MPH passing over through-truss bridges, or through tunnels. Thorough inspection of all cars of logs in train must be made at appropriate locations when train is stopped for meeting trains and other purposes, making certain train and lading are in safe condition before proceeding. Extra stops enroute will be made for this purpose when in the judgment of the Conductor it is necessary. Members of the crew must maintain a watch for logs that may have rolled off cars and if a track is fouled, take prompt action to protect trains.

On double track, Conductors must notify train dispatcher when logs are to be handled and the log train must be at stop when being passed by other trains, except when both trains are handling logs, either one should be at stop until the other train pulls by, whether on siding or double track.

On single track, trains handling logs must be at stop when meeting or being passed by other trains, except when there are more cars than siding will hold, it is permissible for log train to pull by other train at restricted speed.

In double track territory, logs must be secured to cars by chains or cables.

- 4. Brakemen with less than one year of experience should not be used as flagmen except in emergency, and then Superintendent will be notified by wire.
- 5. When operating snow machines in non-block signal territory, no train should be permitted to follow closer than a station apart, when that cannot be done, they will be blocked not less than thirty minutes apart.

After severe blizzard or dirt storm, employes on first train over road must exercise care to avoid accident caused by striking drift without first having drifts faced with hand shovels, cutting in far enough to get beyond the hard snow and giving a perpendicular wall to strike against instead of slope or wedgelike shape. When operating snow dozer, conductor in charge will ride in dozer. On snow and dirt dozers every precaution must be taken to see that cage, flangers and wings clear all obstacles when in service and are properly secured when in through trains, and dozers properly turned. Hand screws must be tightened to raise flangers on dozers as high as possible before making a back-up movement, and must not be released until the dozing work is actually to start. Hand screws holding the cage on dozers must be tightened or chains otherwise fastened except when dozer has air in cylinders and is attended by an employe.

- 6. Due to limited overhead clearance at tunnels and structures, employes are warned to keep off top of cars of extreme height and width when handled in trains and yards, except in emergency. In absence of previous advice on such cars, wire proper officer for instructions.
- 7. Placarded loaded tank cars handled in through freight or mixed trains shall not be nearer than 6th car from engine, occupied caboose or passenger car.

Cars placarded "Explosives", "Flammable", "Corrosive Liquids", or "Poison Gas" handled in through freight trains, local and mixed trains, shall not be nearer than 16th car from engine,

occupied caboose or passenger car.

When length of train will not permit handling of cars as prescribed above—ANY PLACARDED CAR, loaded with above commodities—shall be placed near middle of train, but not nearer than 2nd car from engine, occupied caboose or passenger car.

When switching such cars in terminal yards they must be sepa-

rated from engine by at least one non-placarded car.

When placarded cars described above are handled in freight trains made up in "blocks" or classifications, placarded car or cars shall be placed near middle of the "block" or classification, but not nearer than 6th car from engine, occupied caboose or passenger car.

When such placarded cars are placed in trains they must not be placed next to each other, next to refrigerators equipped with gas-burning heaters, stoves or lanterns, or next to loaded flat cars, or gondola cars containing lading higher than ends of car

that is liable to shift.

Carload express shipments of explosives, sealed and placarded may be handled on passenger trains; LCL shipments may be made in so-called peddler car with messenger in charge when such car is assigned to the handling of express and baggage exclusively.

Terminal or pick-up points enroute must furnish conductor and engineer Form 250 showing consecutively location in train of all cars placarded "Explosives". At points other than terminals where crews change, notice will be transferred from crew to

Employes will be guided by further instructions governing handling of loaded tank cars, Explosives, Flammables, Corrosive Liquids, and Poison Gas found in I. C. C. Regulations and Consolidated Code Rules 727 and 811.

8. Trains departing from stations, either from siding or main track, in trailing point movement actuating points of spring switches, a member of crew must observe indication of governing signal in opposite direction after rear end of train has passed through switch to ascertain if switch points return to normal position. If this signal indicates Stop and no immediate train movement or other cause is evident, report the fact to Superintendent from first available point of communication.

During and immediately following snowstorms or violent wind storms, spring switches must be operated by hand and relined to normal position before heading out through switch in trailing point movement, actuating switch points, to insure switch is in

proper operating condition.

- 9. Facing point locks on hand operated switches are indicated by a six-inch yellow stripe painted on target staff. Be positive locking device is restored to normal position after using. A running switch must not be made through this type switch.
- The following Uniform Code of Operating Rules are in effect in Canada.

Rule 14. (k-a) o o ---

Answer to 14k

Rule 98. Trains or engines must approach the end of double, three or more tracks, junctions, interlocked railway crossings at grade and interlocked drawbridges prepared to stop unless the switches are properly lined, signals indicate proceed and track is clear.

Trains or engines must stop at the stop signs at non-interlocked railway crossings at grade and at non-interlocked drawbridges and not proceed until the proper signal has been given for that purpose.

When clear signals are given at interlocked railway crossings at grade, unless otherwise provided, the speed of any train must not exceed thirty-five miles per hour until the entire train has

passed the crossing.

When clear signals are given at interlocked drawbridges the speed of a passenger train must not exceed twenty-five miles per hour, and of any other train or engine fifteen miles per hour, until the entire train has passed the drawbridge.

Rule 99. When a train is moving under circumstances in which it may be overtaken by another train, lighted fusees must be dropped off at proper intervals and such other action taken as may be necessary to ensure full protection.

When a train stops under circumstances in which it may be overtaken by another train, a flagman must go back immediately with flagman's signals a sufficient distance to ensure full protection, at least:

In day time, if there is no down grade toward train within one mile of its rear and there is a clear view of its rear of 2000 yards from an approaching train \_\_\_\_\_\_\_1000 yards;

At other times and places, if there is no down grade toward train within one mile of its rear....1500 yards;

If there is a down grade toward train within one

mile of its rear \_\_\_\_\_\_2000 yards; When a train stops under circumstances in which it may be overtaken by another train the engineman will immediately signal

the flagman to protect the rear. When ready to proceed he will

recall the flagman.

The flagman must, after going back a sufficient distance from the train to ensure full protection, take up a position where there will be an unobstructed view of him from an approaching train of, if possible, 500 yards, first placing torpedoes not more than 100 nor less than 50 yards apart to cause two explosions at least 200 yards beyond such position and, when necessary, in addition, displaying lighted fusees, and must not return until recalled or relieved and safety of the train will permit. If necessary to go beyond the required distance he will leave the torpedoes at the required distance as an indication of the location of his train, but must, under such conditions, also place torpedoes at the point at which an approaching train is flagged.

If recalled before another train arrives he must, in addition to the torpedoes, leave a fusee burning red at the point from which he returns and while returning to his train a fusee burning red must be placed at such points or times as may be necessary to ensure full protection. When curvature, weather or other conditions require, or when snow plows or flangers may be running,

extra precaution must be taken.

To maintain the proper interval between trains a fusee burning red must be left by the protected train at the point from which it moves.

Flagman must always on the approach of a train display stop signals.

The front of a train must be protected in the same manner when necessary.

Flagmen must each be equipped for day time with

A red flag on a staff, At least eight torpedoes and

Five red fusees; and

For night time and when weather or other conditions obscure day signals,

A red light,
A white light,
A supply of matches,
At least eight torpedoes and

Five red fusees.

A train should not stop between stations at a place where the view from following trains is obstructed if it can be avoided. Conductors and enginemen are responsible for the protection of their trains.

#### PROTECTION OF IMPASSABLE OR SLOW TRACK

40. (a) Before undertaking any work which may render the main track unsafe for movements at normal speed, or if rendered unsafe from any cause, trackmen, bridgemen, or other employees must provide protection by sending out a flagman with flagman's signals in each direction at least 2000 yards from the defective or working point.

(b) After going out the required distance, flagman must take up a position where there will be a clear view of him from an approaching train of, if possible, 500 yards, first placing torpedoes not more than 100 nor less than 50 yards apart to cause two

explosions at least 200 yards beyond such position.

(c) Flagman must not return until recalled or relieved

(d) If necessary to go beyond the required distance, flagman will leave the torpedoes at the required distance, but under such conditions must also place torpedoes at the point at which an approaching train is flagged

(e) On the approach of a train flagman must display stop signals,

using lighted fusees at night or in obscure weather.

(f) Trains stopped by a flagman will be governed by his instructions, and on reaching the defective or working point will there be governed by instructions of the foreman in charge.

(g) Flagman must each be equipped for day time with

A red flag on a staff,

At least eight torpedoes and

Five red fusees; and

For night time and when weather or other conditions obscure day signals

A red light,

A white light,

A supply of matches,

At least eight torpedoes and

Five red fusees.

41. On subdivisions or portions thereof specified in the time table or special instructions, rule 40 may be modified as follows:

(a) By day place a red flag and, in addition, by night a red light between the rails 200 yards in each direction from the defective or working point, and place torpedoes on each rail to cause one explosion 200 yards beyond the red signals, also:

(b) By day place a yellow over red flag and, in addition, by night a yellow light and a red light at least 2000 yards in each direction from the defective or working point on the same side of the track as the engineman of an approaching train, and place torpedoes not more than 100 nor less than 50 yards apart to cause two explosions 200 yards beyond these signals.

(c) Train approaching the signals prescribed by clause (b) must stop, replace the torpedoes and proceed to the red signal prescribed by clause (a) and there be governed by instructions of the foreman in charge, and must not proceed until the red signal

has been removed by the foreman.

(d) When weather or other conditions obscure day signals night signals must be used in addition.

- 42. When the main track is impassable, and after train order protection has been provided and the foreman so advised, rules 40 and 41 may be modified as follows:
- (a) By day place a red flag and, in addition, by night a red light between the rails 200 yards in each direction from the defective or working point, also:
- (b) By day place a yellow flag and, in addition, by night a yellow light at least 2000 yards in each direction from the defective or working point on the same side of the track as the engineman of an approaching train, where there is a clear view of the signal of, if possible, 500 yards.

- (c) Trains stopped by the red signal prescribed by clause (a) must be governed by instructions of the foreman in charge, and must not proceed until the red signal has been removed by the foreman.
- (d) When weather or other conditions obscure day signals night signals must be used in addition.
- 43. When the nature of the defect does not require stop to be made, and after speed restriction has been placed by train order and the foreman so advised, rules 40 and 41 may be modified as follows:
- (a) By day place a yellow flag and, in addition, by night a yellow light at least 2000 yards in each direction from the defective point on the same side of the track as the engineman of an approaching train, also:
- (b) By day place a green flag and, in addition, by night a green light in each direction immediately beyond the defective point.
- (c) Trains must reduce speed to comply with requirements of the train order, and must not increase speed until the entire train has passed the green signal.
- (d) When weather or other conditions obscure day signals night signals must be used in addition.
- 44. On subdivisions or portions thereof specified in the time table or special instructions, when the main track is found to be unsafe for movements at normal speed but safe for speed of ten miles per hour or more, rule 41 may be modified as follows:

(a) By day place a yellow flag and, in addition, by night a yellow light 200 yards in each direction from the defective point on the same side of the track as the engineman of an approaching train, also:

(b) By day place a yellow over red flag and, in addition, by night a yellow light and a red light at least 2000 yards in each direction from the defective point on the same side of the track as the engineman of an approaching train, and place torpedoes not more than 100 nor less than 50 yards apart to cause two explosions 200 yards beyond these signals, also:

(c) By day place a green flag and, in addition, by night a green light in each direction immediately beyond the defective point.

- (d) Trains must stop and replace torpedoes on each side of the defective point, and must reduce speed to ten miles per hour before passing the yellow signal and must not increase speed until the entire train has passed the green signal.
- (e) When weather or other conditions obscure day signals night signals must be used in addition.
- (f) The foreman must report the condition to the train dispatcher as soon as practicable, and when advised that speed restruction has been placed by train order must mark the defective point as prescribed by rule 43.
- 45. In providing protection each main track must be regarded as a track upon which trains may run in either direction. Where two main tracks are on the same roadbed, flags and lights required to be placed on the same side of the track as the engineman of an approaching train under rules 41-44 inclusive must be placed to the outside of the track affected and not between the two main tracks. Under this rule, when the two main tracks on the same roadbed are for single track operation their location will be shown in the time table.
- 46. When flags or lights are placed as set forth in rules 41-45 inclusive they will be mounted on staffs and elevated so as to be clearly in view of the engineman of an approaching train.
- 47. Where the use of torpedoes is required, duplicates should be placed on the opposite rail to explode simultaneously.
- 48. Torpedoes must not be placed near stations nor on public crossings at grade.
- 49. A sign bearing figures indicating permissible speeds, or the word SLOW, placed at the side of the track will indicate a permanent slow order; its location and speeds permitted will be specified in the time table or special instructions.

# FIRST SUBDIVISION

(Main Line)

1. MAXIMUM PERMISSIBLE SPEED FOR TRAINS. Retween Passenger Freight 

2. SPEED RESTRICTIONS.

Cut Bank, Bridge 1090.8 ...... 30 MPH Columbia Falls.....Trains 31 and 32 passing station.... 45 MPH

3. TRAIN REGISTER EXCEPTIONS.

Cut Bank, first class trains and passenger extras register by

Register of regular trains at Cut Bank will cover their arrival at Blackfoot.

Register of regular trains at Whitefish will cover their arrival at Conkelley.

Trov. First class trains and passenger extras register by ticket.

- 4. CLEARANCE PROVISIONS AND EXCEPTIONS RULE 83(B). All trains require clearance Form A at Whitefish. Such clearance will confer the same authority as though received at initial station.
- 5. On arrival at Essex, eastward freight trains requiring helper engine assistance will come to a stop and make full application of air brakes and leave applied until proceed signal received from helper engine. Helper engine will be coupled against rear of caboose and immediately make back up movement to ascertain positive coupling.
- 6. Summit, westward freight trains will pull rear end of train clear of end of double track to avoid delay to eastward trains.

On arrival at Summit, eastward freight trains with helper engine assistance behind caboose must come to a stop clear of the end of double track. Under no circumstances whatsoever will anyone be allowed to ride in the caboose within the limits of helper territory while helper engine is shoving against the rear of train. Train crew must ride in rear cab of helper engine, using rear headlight for center of track inspection when necessary.

- 7. When outfit cars or passenger equipment or TTX and STTX trailer flat cars are handled on rear of freight trains or when stockmen, messengers, etc., are carried in the caboose, helper engines must be cut into train.
- 8. CROSSOVERS ON DOUBLE TRACK.

FACING POINT

TRAILING POINT

Cut Bank Summit

Sundance MP 1110

Blacktail

Essex, east crossover

Essex, west crossover

Columbia Falls, west crossover

Columbia Falls, east crossover Half Moon

- 9. Trego, do not spot cars within 300 feet of public crossing.
- 10. MANUAL INTERLOCKINGS WITH DUAL CONTROL SWITCHES.

Cut Bank-end of double track east and west end Bridge 1090.8. Summit ..... End of Double track.

East switch westward siding.

Switch at end of double track and westward siding above points controlled by operator at depot.

When a yellow indication (normally dark) is displayed below two red indications on the governing home signal, it insures route is lined and locked and confers authority (AFTER STOP-PING) to pass through Interlocking Limits at restricted speed, then proceed in accordance with train rights and operating rules expecting to find track occupied beyond Interlocking Limits.

Tobacco ......West siding switch Controlled by operator at Eureka.

#### 11. AUTOMATIC INTERLOCKINGS.

Nimrod	Single Trac	k l	Bridge 1	165.3.
Pinnacle	Single Track MP	11'	73.2 to	1177.6
	End			
Carlallar	End	0.4	double	track
Conkeney		01	111.	₩ # # - 1-
Whitefish .	End	OI	aoubie	track.

# Nimrod and Pinnacle:

Trains or engines stopped by a stop indication at entrance to Pinnacle interlocking will be governed by Rule 509.

Westward trains at Nimrod may hold interlocking for a period of six minutes by operating push button at westward home signal.

Trains and engines approaching interlocking holding instructions requiring them to wait to permit other trains or engines to move through interlocking will stop before passing "Approach Control Nimrod" and "Approach Control Pinnacle" sign for track they occupy and wait until their train rights permit them to proceed.

At eastward and westward home signals a switch key controller fastened to the side of the instrument house near the home signals and a third switch key controller placed in the depot at inspection point for westward trains just east of interlocking, to assist in moving trains when home signal displays Stop-indico assist in moving trains when nome signal displays Stop-Indication account plugs in slide fence pulled out. When trains or engines receive a Stop-indication at home signal and no conflicting train movement is evident, trainmen should operate key controller by inserting switch key in controller and turning clockwise toward R, holding in that position for a few seconds. If home signal closers after operating key controller train may If home signal clears after operating key controller, train may proceed through interlocking at restricted speed, looking out for rocks or other obstructions fouling track. If home signal does not clear by operation of key controller, train must be governed by train rights, Interlocking Rules and Special Instructions stated above.

A work train key controller, so marked, is located on side of instrument house at west end of interlocking. Work train occupying eastward approach track can release interlocking for other train movements by inserting switch-key in controller and turning clockwise toward R, holding key in that position for a few seconds. To clear home signal again for work train movement to single track, key controller must be operated counter-clockwise toward N.

Indicator consisting of a red banner on white background in a cast iron case marked "Trainmen's Indicator", and fastened to the west cantilever mast at Nimrod Interlocker.

The red banner, normally vertical, will change to horizontal position to indicate approach of eastward train on eastward track when train is 8000 ft. west of cantilever mast.

Pinnacle, signals located to left of track to govern movements against current of traffic to single track at each end of interlocking.

12. Double track extends between Summit and Red Eagle except Nimrod and Pinnacle single track interlockings.

#### 13. CONDITIONAL PASSENGER STOPS.

No. 31 Cut Bank to discharge revenue passengers from Williston and east and to pick up passengers for Spokane and west where No. 31 is scheduled to stop.

No. 32 Cut Bank to discharge revenue passengers from Spokane and west and to pick up passengers for Williston and east where No. 32 is scheduled to stop.

No. 27 Glacier Park and Belton to pick up revenue passengers for Spokane and west, where No. 27 scheduled to stop and to discharge revenue passengers from Havre and east.

No. 28 Glacier Park and Belton to discharge revenue passengers from Spokane and west and to pick up revenue passengers for Havre and points east where No. 28 scheduled to stop.

# SECOND SUBDIVISION

(Main Line)

# 1. MAXIMUM PERMISSIBLE SPEED FOR TRAINS.

Passenger Freight Between Troy and Fort Wright ...... 79 MPH 50 MPH

#### 2. SPEED RESTRICTIONS.

Between Albeni Falls Spur and Diamond Match Mill.....10 MPH Mead, over switches and frogs on curves Aluminum Spokane, all trains approach crossover east of bridge 270. and crossover west of Howard Street at restricted speed. Spokane, public crossing Howard Street ...... 12 MPH other public crossings ...... 20 MPH

#### 3. TRAIN REGISTER EXCEPTIONS.

Ft. Wright second subdivision trains will register by ticket.

Spokane, first class trains and trains originating or terminating at passenger station will register and receive clearance.

Hillyard, First class trains and passenger extras register by

Register of regular trains at Hillyard will cover their arrival at Dean.

Troy. First class trains and passenger extras register by ticket.

Rules 251, 251(A), 253 and 254 apply on Eastward and Westward tracks between Fort Wright and Dean for movements with the current of traffic.

Trains (Except First Class trains and Passenger Extras) must not enter main track between these points unless given a proceed signal at an interlocking or until permission is received from operator or train dispatcher. At Dean, a proceed indica-tion on Eastward home signal at end of double track will confer authority to Eastward inferior trains to run ahead of Eastward superior trains to station Dean.

# 5. CLEARANCE PROVISIONS AND EXCEPTIONS RULE 83(B).

Spokane, clearance issued and signed by the Superintendent will confer the same authority to a first class train as though received at its initial station.

Dean, Rule 83(B) does not apply if train order signal indicates proceed.

#### 6. CROSSOVERS ON DOUBLE TRACK.

Facing point. Spokane. MP 1477.61 (Scissors) on Br. 273 west of Spokane passenger depot.

Trailing point.

MP 1477.22 east of Br. 270. MP 1473.14 west of Hillyard. MP 1476 east of UP, RR, crossing, Spokane.

MP 1476.69 on Br. 269, Spo-

MP 1477.12 east of Br. 270, Spokane.

MP 1477.61 (Scissors) on Br. 273 west of Spokane passenger depot.

MP 1478.41 west of Br. 273, Spokane.

#### 7. MANUAL INTERLOCKING.

Fort Wright ..... End of double track and SP&S Ry Jct. Whistle signals for routes: Main Track GN Ry ...... 1 short, 1 long. Main Track SP&S Ry ...... 1 long, 1 short. Siding GN Ry \_\_\_\_\_2 long, 1 short.

#### 8. MANUAL INTERLOCKINGS WITH DUAL CONTROL SWITCHES.

Troy .....west siding switch controlled by operator at depot.

HILLYARD..... End of double track and yard lead switches east and west of yard controlled by operator in yard office.

The "home signal limits" (Rule 605) on main track extend from the westward home signals at east end of yard to eastward home signals at west end of yard.

After receiving proper signal indication and entering home signal limits at east and west end Hillyard yard, switching movements may be made between these home signals and Rule 670 will not apply.

Whistle signals for routes west end of yard:

Eastward trains. 

To yard \_\_\_\_\_1 long, 1 short.

Westward trains.

To westward main track ...... 1 long.

To eastward main track \_\_\_\_\_2 long, 1 short.

#### 9. AUTOMATIC INTERLOCKINGS.

U.P.R.R. crossing 1.17 miles east of Spokane. After signal has cleared for either a GN or UP route the entry of a train or engine of the other railroad into their approach control will automatically start a predetermined time cycle of 2 to 4 minutes which at expiration will cause signal to go to stop position and after another time cycle of 2 minutes will clear signal for route on other railroad.

Push buttons located on home signals of all main track routes may be operated to obtain signal indication for a reverse movement. Push button emergency release is located near crossing and instructions are posted in box. Switch to the S.I. interchange just west of the crossing is electrically locked.

Dean.....End of double track.

10. Double track extends between Dean and Fort Wright, except at Hillyard and over bridge 274 and SP&S Jct. which is governed by interlocking signals.

- 11. Spokane, Trent avenue crossing protected by watchmen between hours 7:00 A.M. and 11:00 P.M. daily, outside these assigned hours a member of crew must be on ground at crossing to protect movement.
- Spokane, City Ordinance prohibits sounding engine whistle within city limits, except to prevent accident not otherwise avoidable, or to signal an interlocking, or to communicate with a flagman.
- Kettle Falls, all trains must secure clearance.
- Dean, Rule 83(B) does not apply if train order signal indicates proceed.
- 4. Northport-Waneta, trains will not pass International Border without permission of Customs and Immigration Inspectors.
- 5. Canadian Maintenance of Way Flagging Rules 41 and 44 apply between Troup Junction, B. C. and Boundary, U. S.

# THIRD SUBDIVISION

(Kalispell Line)

1. MAXIMUM PERMISSIBLE SPEED FOR TRAINS.

Between

2. SPEED RESTRICTIONS.

Kalispell, all trains over main street crossing.............. 5 MPH

# FOURTH SUBDIVISION

(K. V. Line)

1. MAXIMUM PERMISSIBLE SPEED FOR TRAINS.

Between

Bonners Ferry and Port Hill ...... 10 MPH

Diesels heavier than 250,000 pounds prohibited.
 Additional units must be separated not less than five cars.

# FIFTH SUBDIVISION

(Kettle Falls-Nelson Lines)

1. MAXIMUM PERMISSIBLE SPEED FOR TRAINS.

Between

2. SPEED RESTRICTIONS.

CLEARANCE PROVISIONS AND EXCEPTIONS RULE 83(B).
 Great Northern clearance received at Nelson will clear train at Troup Jct.

# SIXTH SUBDIVISION

(Republic Line)

1. MAXIMUM PERMISSIBLE SPEED FOR TRAINS.

Between

Kettle Falls and Republic ...... 20 MPH

- Laurier-Danville, trains will not pass International Border without permission of Customs and Immigration Inspectors.
- 3. Canadian Maintenance of Way Flagging Rules 41 and 44 apply between Laurier, Washington and Danville, Washington.

# SEVENTH SUBDIVISION

(Coeur d'Alene Line)

1. MAXIMUM PERMISSIBLE SPEED FOR TRAINS.

Between

Spokane and Coeur d'Alene ...... 25 MPH

2. SPEED RESTRICTIONS.

8. RESTRICTED CLEARANCES.

Bridges C 7.7, 7.8 and 7.9 3200 feet west Millwood, restricted side clearance.

Spokane, bridges 1.3, 1.5 and 1.6 will not clear man on top or sides of cars or engines. Train and enginemen must keep off top or side of cars and engines while passing over bridges, except in emergency and then use extreme caution.

4. Coeur d'Alene, trains and engines must stop before passing over 11th Street and Mullan Avenue and 15th Street and Mullan Avenue crossings, movement must be protected by flagman on the ground at the crossing.

Coeur d'Alene, trains and engines must stop and sound two blasts of engine whistle before proceeding over Diamond Drill Crossing.

- 5. Trains leaving Spokane will be cleared thru Great Northern dispatcher to Spokane Bridge and will be cleared at Spokane Telegraph office by CMStP&P RR dispatcher for movement from Spokane Bridge to Coeur d'Alene. Train leaving Coeur d'Alene will be cleared by Great Northern dispatcher for movement from Spokane Bridge to Spokane and by CMStP&P RR dispatcher at their office in Coeur d'Alene for movement from Coeur d'Alene to Spokane Bridge.
- 6. MANUAL INTERLOCKINGS.

Spokane, 0.85 miles west of \_\_\_\_\_\_\_\_\_N.P. Crossing. Whistle signal for G.N. to U.P. main track\_\_\_\_\_\_2 long 1 short. Trains moving from Seventh Subdivision to U.P. R.R. tracks will be governed by dwarf signal located at base of westward two-arm interlocking home signal.

# **EIGHTH SUBDIVISION**

(Moscow Line)

T. MAXIMUM PERMISSIBLE SPEED FOR TRAINS.

Between

Spokane and Moscow \_\_\_\_\_\_ 25 MPH

2. SPEED RESTRICTIONS.

Moscow, thru city limits ...... 10 MPH

3. Operation between N.P. Crossing on Eighth Subdivision and U.P. R.R. Junction, 2.60 miles west of West Fairfield, is joint with U.P. R.R. and their timetable and special instructions will govern. Train movements between N.P. Crossing and Dishman will be governed by remote controlled signals located at N.P. Crossing, at east and west ends of new yard, and east end of siding at Dishman. Indications of such signals will supersede the superiority of trains between these points. When one of these remote controlled signals displays Stop-indication, member of crew must communicate with operator and be governed by his instructions in accordance with Rule 509.

Trains leaving Spokane will be cleared at Spokane Telegraph office for operation east of U.P. R.R. Junction and cleared at Dishman by U.P. R.R. dispatcher for movement Dishman to U.P. R.R. Junction, 2.60 miles west of West Fairfield. Trains leaving U.P. R.R. Junction for movement over Union Pacific line will be cleared by U.P. R.R. dispatcher at Fairfield on the U.P. R.R.

Trains will register at N.P. Crossing by ticket. Normal position of U.P. R.R. Junction switch is for Great Northern main track.

# NINTH SUBDIVISION

(Colfax Line)

1. MAXIMUM PERMISSIBLE SPEED FOR TRAINS.

Between

2. RESTRICTED CLEARANCES.

Colfax tunnel and bridges 71.6, 72.8 and 72.4 will not clear man on top or sides of cars and engines.


- 3. Colfax, use care while moving over North and Last Streets account restricted view.
- 4. SEMI-AUTOMATIC INTERLOCKINGS.


5. RAILROAD CROSSING PROTECTED BY GATES.


Thornton, 0.57 miles west of \_\_\_\_\_\_UP RR crossing Normal position is stop for Great Northern.

# BUSINESS TRACKS NOT SHOWN AS STATIONS ON TIME TABLE

	1						r
Name	Location	Capaci- ty Cars	Switch Opens	Name	Location	Capaci- ty Cars	Switch Opens
Subdivision No. 1				Subdivision No. 5			
Gunsight—storage track	3.25 miles east of Sundance	8	West East	Fred Draper Lbr. Co. Spur	1.9 miles west of Ymir 2.0 miles west of Meadows	16 6	East West
Meriwether-storage track	5.97 miles east of Blackfoot	12 {	Eastward	Ross	3.2 miles west of Meadows	9	Both
	3.56 miles west of Triple Divide	60	Track Both	Hearn Bros. Spur Equipment Spur	0.3 mile east of Parks	3	East
spotted hone—stock tracks.	3.30 miles west of Triple Divide	00		Equipment sput	Gardens	3	West
Fores Bit	2.97 miles west Essex	50 {	East ww trk	C. M. & S. Co. Spur	0.7 mile east of Int. Bdy. at Waneta	34	East
			East	West Kootenay Power &			Last
Hidden Lake—storage track.	4.49 miles west of Pinnacle 779 feet west of end of double	16	East	Light Co. Ldg	0.5 mile west of Waneta 3.3 miles west of Northport	10	West
Conkeney 110	track Conkelley	31 {	West ww trk	Kanes Spur	4.1 miles west of Northport	5	West
Anaconda Aluminum Co.	779 feet west of end of double track Conkelley			Cameron Spur	4.4 miles west of Northport 1.2 miles west of Marble, in-	17	East
	track Conkelley	114 {	Both ww trk		cluding trackage of Spokane-		
	1.01 miles south of Columbia	4	East		Portland Cement Co., Private Yard	251	West
Rocky Mountain Lumber Co. Spur	1.25 miles south of Columbia	_		Hendrix Spur	3.4 miles east of Bossburg 3.1 miles west of Addy	6	West
ł	Falls	92	East Both	Blue Creek	3.1 miles west of Addy 3.0 miles east of Chewelah	19 19	Both Both
Zonolite Siding	4.8 miles east Libby (MP	-	Both	Kulzer's Spur	1.7 miles west of Valley	6	East
	1331)	49	Both	North American Non	1.9 miles west of Valley	4	East
		ŀ	ļ	Bilica Sand Co. Spur	II.0 mile east of Springdale	8	West
Subdivision No. 2	6.46 miles east of Crossport	15	East	Loon Lake Gravel Spur	1.6 miles east of Loon Lake	40	East
Crossport Spur	2.0 miles east of Crossport	15	East	Subdivision No. 6 Harter Lumber Co	1.02 miles west of West Kettle		
Idaho-Boyd Conlee Spur	0.71 mile east Bonners Ferry 4.96 miles west Bonners Ferry.	36 18	West East	2	Falls	10	Both
Emerson Spur	IO & mile east Colburn	58	West	Matneys Spur	2.72 miles west of West Kettle Falls	4	East
Dover connection to S. I. Railway	2.47 miles west of Sandpoint	28	East	Spokane-Portland Cement	į	10	
Penrith Spur	2.7 miles east Newport 3.5 miles west Newport	19	East	Talisman Mining Co	1.3 miles east of Boyds 0.7 miles east of Laurier	12 5	East East
Pacific Northwest Alloys Spur	1352 ft. east of Depot, Newport	12 20	East East	Riverside Seed Farms Ltd.		_	
Davies Spur	2.98 miles west of Camden 1.9 miles east Mead	34	East	Consolidated Mining and	3.5 miles east of Grand Forks.	2	East
	·			Smelting Co. Spur	11.1 miles east of Grand Forks.	12	West
Subdivision No. 3				San Poil Spur	0.4 mile west of Grand Forks. 1.0 mile west of Torboy	3 8	East East
Associated Seed Growers	3.5 miles east of Kalispell	6	East	Carballada Na 7	-		
Montana Saw Service Co.	3.3 miles east of Kalispell	5	East	Northwest Thr. Co	1.2 miles west of Coeur d'Alene 2.6 miles west of Coeur d'Alene	16 34	West Both
Koenig Bros. Spur	2.6 miles east of Kalispell	3	West	Huetter—connection to N. P.	1		роги
Carter Oil Co. Spur	1.3 miles east of Kalispell	47 9	East East	Railway Post Falls	2.9 miles west of Coeur d'Alene 8.46 miles west of Coeur d'Alene	15 12	Both Both
Interchange Track	1.2 miles east of Kalispell 0.3 miles west of west wye			Post Falls Lumber Co	8.46 miles west of Coeur d'Alene	6	East
Forest Products Co. Spur	switch, Kalispell On interchange track	27	Both West	Carders	2.13 miles east of Greenacres 1.9 miles west of Greenacres	12 5	Both West
Mills Lumber Co. Spur	2200 feet west of west wye			Subdivision No. 8	1		West
Duffy Spur	switch, Kalispell	8	East East	Estes	3.22 miles west of Moscow 3.81 miles west of Viola	15	Both
Northwest Timber Co. Spur.	4.4 miles west of Kalispell	25	West	Longwill	11.39 miles west of Sokulk	7 5	West East
Erickson Bros. Spur	4.5 miles west of Kalispell	4	East	Seaburv	12.39 miles west of Geary	11	Both Both
				Mt. Hope Industrial Spur	3.49 miles west of Spring Valley 2.94 miles west of Waverly		East
Subdivision No. 4 Quarry Spur	1.3 miles east Bonners Ferry.	4	West	Old West Fairfield		17	Both Both
Thompson Lumber Co. Spur.	1.5 miles east Bonners Ferry.	8	East	Vera Industrial Spur	4.26 miles east of Dishman	5	East
Allen's Spur	4.7 miles east Bonners Ferry. 11.5 miles east Bonners Ferry	6 2	East West	Includes True's Oil Spur Opportunity		3 24	West East
DeVoignes Spur	113.2 miles east Bonners Ferry.	4	East	West Apple Center		4	West
Camp 5 Spur	14.1 miles east Bonners Ferry.	11 2	Both East	Dishman		9 21	East West
Dehlbom Spur	15.4 miles east Bonners Ferry. 17.5 miles east Bonners Ferry.	4	West	Subdivision No. 9			111000
Edward's Spur	18.5 miles east Bonners Ferry. 19.7 miles east Bonners Ferry.	8	West Both	Manning	5.68 miles west of Colfax 2.07 miles east of Steptoe	6 16	West
Harper's Spur	21.8 miles east Bonners Ferry.	4	West	Stoneham	3.12 miles west of Thornton	5	Both East
K. V. Farm Spur	22.2 miles east Bonners Ferry. 24.6 miles east Bonners Ferry.	4 5	West West	Balder	4.76 miles east of Rosalia 2.54 miles east of Spring Valley	13 11	Both East
	Zonnord z cirj.	<u>, , , , , , , , , , , , , , , , , , , </u>	. 11 000	, 2004410	mos mines east of phinis Astieh	. 11	Lust

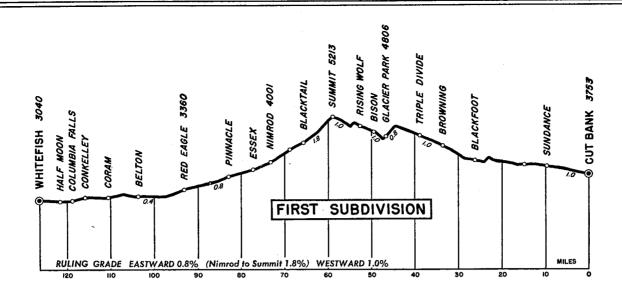

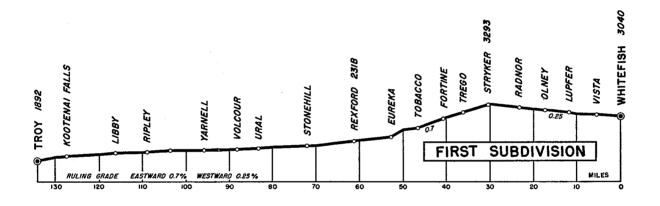

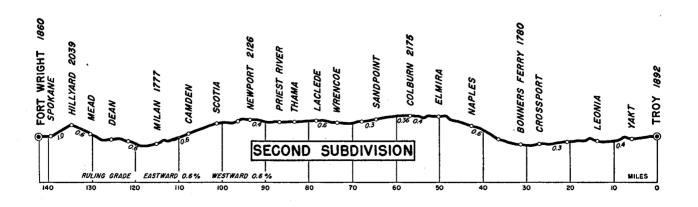

Pages 15-16 (rear covers) are blank.