
GREAT NORTHERN RAILWAY

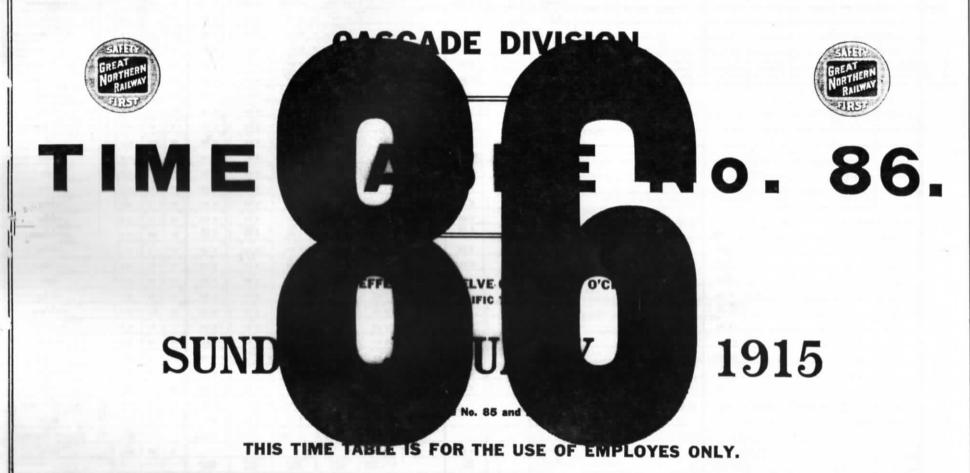

W. R. SMITH, Superintendent.

C. E. LEVERICH, Asst. General Superintendent.

W. C. WATROUS, General Supt. of Transportation.

J. H. O'NEILL, General Superintendent. GEO. H. EMERSON, General Manager.

2 WEST BOUND.

FIRST DISTRICT-LEAVENWORTH TO EVERETT JUNCTION.

THIRD (CLASS.	SECOND CLASS.			FIRST	CLASS.			Capa Side	City of Tracks			
	715	411	401	285	27	3	1	25	1	4	11	In Effect January 10, 1915.	
	Mdec. Freight	Fast Freight	Fast Freight	Passenger	Fast Mail	Passenger	Passenger	Passager	1	6	11		-
	Leave Daily Es Sunday	Leave Daily	Leave Daily	Leave Daily Ex Sunday	Daily	Leave Daily	Leave Daily	Daily	2	8	23	STATIONS.	
		2.16hm	8 00An		11 40Pm	3.50hm	2 05hm	2.20km	60	492		LEAVENWORTH	
		8.00	8.40		11.56	1 4 08	8.22	9 37	7.5		6.3	DRURY	
		8.25	9.05		12.05 Am	1 4.20	2.32	9.47	155	22	10.5	снімайким	
		3 53	9.25		18 11	1 4 28	2.39	9.54	74	10	13.0	wikfon	
		4.16	9.45		12.19	1 4 37	2 47	8.02	71		17.5	MASON CREEK	
		402-3 4-45	10.00		12.24	• 402-411 • 4 45	. 2.53	3 07	145	8	20 5	MIRRITT	
		8.20	10.35		12 38	f 5.02	8.08	8.22	78		24.9	GAVNOR	
		8.50	11.10		19 50	1 5.17	3 20	8.35	152	5	26.0	t berne	
		8.40	11.80		1.05	. 5 37	3 40	3.58	176	87	32.3	CASCADE TUNNEL	
		7.10	12.10h		. 1.18	. 5.52	8.55	4 06	85	263	35.9	Z	
		7 80	19.45		1.29	f 6.03	4.05	4.16	70		39 5	EMBRO	
		7.45	1 05		1 89	f 6.12	4 18	4.25	75	10	42 2	COREA.	
		8.10	1.35		1.50	. 6.23	4.23	4.35	75	22	45 2	SCENIC SCENIC	
		8.25	2.10		8.00	1 8 34	4.89	4.44	76		48.3	ALPINE	
_		8.40	2.28		9.10	1 0 45	4.49	4.50	75	15	61 8	TONOA	
	7 10Am	9.00	2 50 8.20	8 50km	· 1 18 *	* 7.88	* 2 85	. 8:95	63	230	57.0	SKYKOMISH	-
	7 25	9.40	8 35	1 002	8 40	7 18	8 10	5.10	72	7	61.1	GROTTO.	-
	7 40	10.05	8.50	. 9.16	9 80	7 23	8.21	5.29	50	60	66.1	HALFORD	
	8 00	10.25	4.08	. 9 28	8.01	. 7.35	8.82	5.40	71	21	71.2		H
	8 25	10.40	4.29	1 9 88	8.10	1 7.46	5.49	5.49	78	17	76.3	REITER	
	18 48 25	10 50	1 10	94-715 9 44	8.16	. 7.55	8.49	5 55	86	330	NO 0	OULD BAN	
	10.20			. 9 50	8.91	. 8.01	8.83	6 00		45	82 4	arditur.	-
	10 88	11 56	5 25	10 00	8.27	8.10	. 6.00	402 6 06	70	33		sultan	_
	12 34hn	12.20km	1-286 6-18	. 10.18	8.41	. 8.28	286-401 • 6 16	6.10	105	35	93.3	Mohilos	
	1 15	12.54	8.45	10 34	3 55	. 8 ² 52	. 6.85	6.31	74	116	100.2	snonokisn.	
	1 40	1.90	7.00	10 45	4 08	9 09	6.47	6.41	70	63	106.0	Loblic	-
				f 10.48	4 08	9.05	6 50	6 44	43	174	107 6	# PACIFIC AVENUE	-
				. 10 57	. 4.17	9.13	. 7.00	. 6.52	1		108.7	Everett	-
				11.00kg	4.20km	0.15Mg	7.02m	6.55Am	_	-	109.5	EVERETT JUNCTION	
	2.10hs	2.05	8.00m			0.50/8	7.04/8	0.00	75	637	109.3	Via N. P. Ry.	
	Arrive Daily Ea. Sunday	Arrive Daily	Arrive Daily	Arrive Daily Es. Sunday	Arrive Daily	Arrive Daily	Arrive Daily	Arrive Daily	<u> </u>		107.3		1.1.1
	715	411	401	285	27	3	1	25	_	· ·			_
	7.00	11.50	12.0	2.10 24 3	4.40	5 25 21 5	4 67 27 0	4 35	1-	-		Time Over District Average Speed Per Hour	_

Electric train staff block system between Everett Junction and Pacific Ave., and between Skykomish and Leavenworth.

EAST BOUND. FIRST CLASS. Time Table No. 86. 286 2 402 26 28 SIGNS. in Affect January 10, 1915. See Hule ', page 1: Passenger Passenger ast Freigh Express Passager Passenger STATIONS. Arrive Daily Arrive 7 00% 109 5 Re DN WCTYO 6.00 4.25fa . 1 40k LEAVENWORTH 1 22 6 20 DRURY 4 08 103 2 8 41 1.32 CHIWAUKUM 3.59 1 13 6 66 99 0 DN W . 1 91 3 53 WINTON 1 07 5 35 96 5 DN 5 23 1 1 12 12 57 NASON CREEK 1 1 02 3 43 5 05 92 0 DN 6 10 MERRITT 8 00 1 12 55 3 37 12 50 5v.0 12 38 GAYNOR 3 28 4 20 54 5 4 48 1 12 46 BERNE 1 12 38 3 20 12.26 4 05 DN W 4 35 81.5 CASCADE TUNNEL . 12 14km 3 40 . 12 27 3 10 77.2 DN W T 2 55 TYE 12 10m . 11 57 2 55 73 5 DN WC 4 06 EMBRO 11 89 1 35 1 11 53 70 0 DN W 3 48 1 05 11 27 COREA 8 35 1 11 43 2 33 ackin. . 11 15 12 35Fm 2 24 64 3 DN W 8.20 . 11 39 At lake 2 10 11.3 8 01 f 11 16 10 59 11 10 vdd. 11 03 1 11 03 2 00 10.47 58.9 1174 9 47 9 25 . 10 15 1 45 10.29 3 38 anyddmian 7 558s ... DR WE V 9 02 ambira f 10.30 1 31 1 7.40 10.15 10 05 HACEBRO f 10.20 1 23 7 23 8 30 41.4 D W 3.64 8 00 INDEX 38 3 DN . 10 66 1.12 7.10 9 53 1.64 REITER 33 2 0.51 1 01 6 54 9 41 2 30 7 05 GOLD BAR 9 33 29 5 DN 1 89 12.55 6 44 STARTUP 9 29 27 1 0 38 12 51 SULTAN 6 06 9.23 23 7 D 1 22 9.33 12 46 6.30 MONROE 12 34 6 15 9 07 5.35 16 2 DN W Y . 9 20 1 10 SNOHOMISH 12 54 9.3 9.04 12 20 5.55 8 52 5 10 LOWELL 8.41 4 55 3.5 DN 12.43 8.51 12 11 5.87 PACIFIC AVENUE 12.40 12 08 5.84 8.38 1.9 DN 8.48 EVERETT 0 8 12 36 8 45 12 O5Pe 5.80 8 35 EVERETT JUNCTION DN 19 30kg 8 40km 11.59k 5.20h 8 30Pm 0 0 P VIA N. P. R. Re DN WCTYO 4 30km Leave Leave Daily Dady E. bu Daily Dady 402 28 26 4 286 2 5 10 21 2 24.5

Interlocking Plant at bridge 455 just east of Snohomish. No distant signals. Home signal are located 550 feet each way from draw span; details are located 55 feet in advance of home signals.

Trains must not exceed speed of 8 miles per hour over drawbridges and Interlocking Plants.

Special Rules.

West bound trains are superior to east bound trains of the same class.

No. 27 is superior to all other trains. Opposing first class trains will clear Nes. 25 and 27 five (5) minutes.

Other opposing trains will clear Nos. 4, 25 and 27 ten (10) minutes.

All west bound trains must be clear at the time Nos.25 and 27 are due to leave the next station in the rear where time is

All cast bound trains must be clear at the time No. 4 is due to leave the next station in the rear where time is shown.

Trains 1, 2, 4, 25, 27 and 28 will register by card at Gold Bar, except when running in sections, conductor will register in

Freight trains will use N. P. tracks between Lowell and Delta and will be governed by N. P. time table and rules between these

All trains will reduce speed to eight miles per hour through Martin Greek Tunnal and over bridge- at either end All trains will reduce speed to ten miles per hour over crossing just east of Parific Avenue Freight House. Additional to other required tests of the air brake, no train will leave Cascade Tunnel until the air brakes have been carefully tested. Engineer will set the brakes and leave them sot until trainment cannine each car, then release them, and train men will again examine each car and see that brakes release before giving the signal to start the train. Conductors must inform engineers how many cars loaded and empty in the train, and how many cars of "air" are working. All retaine a must be used from Cascade Tunnel to Merritt, and from Chia sukum to Leavenvorth, and from Cascade Tunnel

Trains are one sated to occur a block post, 125 feet west of the east crossover switch Cascade Tonnel and the safety switch west rains are operated is recent a more post, 123 feet west or the east crossover system consequence name and the streng water west and deput at Typ, by a train staff block system. No train or engine will be fruit a either direction between the limit in mentioned unless train suriners and the enginers and believe cogine cach has in his possession a section of a staff which will be handed to them by operators and will be retained by them until entire train has cleared block, then sections of staff must be handed to operator. When no helper engine is used, or then any cars behind helper, conductor or backenan located on rear of train must be in possession of one-

Only one train as permitted to enter or use the block at the same time. Only one train is permitted to enter or use the block at the same time.

All cast bound trains will approach the east end of the concrete shed at Tye under absolute control and will not pass the fouling int of the passing trick unders signalled to do so by the Tunnel conductor.

Inflicting to other located 2400 feet cast of switch at Holinquist Spar half-unde east of Nource.

Semaphore located 1200 feet cast of which at Hofmquist Spur main-mic cast of Nonroc.

Berlin and Barrin and Professor Spur two miles east of Index will be flag stop for Nos. 255 and 256.

No. 2 will stop at Adrian to let off passengers from points Everett and west.

Yard limit boards placed each way from Gold Bur, Skykonish, Cascade Tunnel and Leavenworth, and east from Pacific Avenue.

Yard limit part in between Pacific Avenue and North in Pacific R. commence at N. P. Freight Depot.

FIRST DISTRICT-LEAVENWORTH TO EVERETT JUNCTION.

Leavenworth for trains Nos. 1, 3, 25, 27, 401 and 411. Everett Jet. for trains Nos. 2, 4, 36, 28 and 286. Skykomish for trains Nos. 285 and 715.

Delta for or an 10

ERMINAL STATIONS.

Exercise or train No. 2, 4, 26, 28 and 102. Skykoniish for train No. 286. Everett Jct. for trains 1, 3, 25, 27 and 285. Delta, 401, 411 and 715.

DERAIL SWITCHES.

Derail switches must always be set for derail except when in actual use, whether there are any cars on the tracks or not Cascade Tunnel eart passing track lead, 30 feet from main line.

Tye, west end Industry track.

Tye Safety Switch, 70 feet west of station, on main line Scenic Industry track.

Grotto, 150 feet east of west head block Industry track Index Industry track 120 feet from west head block.

H it.r. at end Indust track. Mource Mill Spur, 200 feet from head block

Brevery Spur, Pacific Avenue, 210 feet from head block.

Frye-Bruhn Spur, 120 feet from Crossing Agnew Hardware Co Spur.

Power House Spur, 105 feet from head block.

Chiwaukum and Merritt.

Rusiness tracks not shown as stations on time table

н	- Carrier C	1101 2110411 45 514110115 011 111110 101111		40.00	
	NAME	LOCATION	OPENS	LENGTH	CAR CAPACITY
i	Power House Spu-	2.0 Miles west of Leavenworth.			d
ė	Great Republic Mining Co., Berlin	0.3 Miles west of Skykomish	East West		20 14
	Grotto Lumber Co	0.3 Miles east of Grotto	East Both cuds	1200 feat	25
	G. N. Shingle Co.'s Siding	3.5 Miles west of Grotto	Both cods	1275 fest	25 21 22
-	Harbrook Spur	2.0 Miles east of Index	West		5
-		0.5 Miles east of Index	East		12
		0.7 Miles west of Index	West East		12 10 26
-	Gold Bar Dir. Co Spur Casey's Spur	0.1 Miles east of Sultan	East		5
_	Sult in Logaing Company Connection	2.0 Miles west of Sultan			37
	Monroe Mill Spur	0.3 Miles east of Monroe	East		18
	Mource Gravel Pit Wagner & Wilson Lbr. Co. Spur	Opens off Monroe Gravel Pit Track	West		10 25
	Woodruff	2.0 Miles west of Monroe		7477431	24
	Summer Iron Works Spar	0.9 Miles east of Pacific Ave	West	Torrespondent	15

			Tracks	Capa					CLASS.	FIRST						SECOND CLASS.	ED CLASS.
	Time Table No. 86.	ros	4	racks	27	25	357	277	285	359	273	1	355	3	401		717
	and the state of	12	4	T du	La Dial	Property	Parager	Partet 1	I wager	Pass-uzer	Passenger	Passenger	Parsenger	Passinger.	Fast Freight		Mdse. Freight
	STATIONS.	D L	Oth	Pass	65	1037	L C-	Lara Dat E. Samir	L. A. Dady E. Funday	Dal	Leave Daily	Date:	Leave Detr	Lever Daile	Leave Heile		Le ive Daily
ī	. EVERETT JUNCTION				1 20%	5-55As	7 00An	9 35Am	11 00Am	2 10ħn	5 35m	7 02fm	8 20Pa	19.16Pm	2.30ka		4.00fm
	MUKILTEO	3.8	110		4 27	7 01	7.05	9.43	f 11.09	2 16	5 45	7.09	8.27	9.22	2.45		4 20
18	MOSHER	7.9			4.95	7.08	7.16	f 9 50	1 11 16	2 32	5.53	7 16	8 33	9 28	2 55		4 35
100	MEADOWDALE .	10 9	6		4 49	7 18	7.29	9 56	f 11.22	2.27	6.00	7.22	8.38	9 33	3 05		4 50
1	EDMONDS	14.5	101		4 61	7.30	7 88	10.05	11.29	2 33	6.10	7.29	8 45	9.40	8.25		6.30
3	RICHMOND BEACH	17 8	+7		1 50	7.25	7.89	10.12	f 11 36	2 38	6.18	7.35	8 51	9 46	3 35		6.20
1	BALLARD	26.9	191		5 15	₹.40	7 56	10 81	1 11 58	2 58	6 37	7.51	9.08	10.09	4.15		7 05
	INTERDAY	28.0	633	205	5 20	7 44	9 00 E	10 39	f 11 58	8.57	6 49	7.65	0.12	10 06	4 80km		7.20Fm
-	о. м. воск	29 1	285		5 25	7 48	5.04	10 43	12.02ħa	8 02	6.47	8.00	9 17	10 11			
1	sedifie	12 7	541	-	6 41A	B OCA	5 15 An	10 55An	19 15Pm	8 15Pm	7 00fm	8 15Pm	9 30h	10 25Fm			
1	SLATTLE				C 00ks		11.00An			8 45hn		8 35Fm					
} ;	TAPPAT	73 4	153		7.05An		12 20Pm			5 00		10 00m					
] ?	PORVIAND	215 8	1000 1000				5 45Pm			10 00m							
					Dats	Bar	Daily	Es. Bunday	Et. Sunday	Delly	Arrive Daily	Daily Daily	Arrive Daily	Daily	Armys Daily		Arrive Daily
					27	25	357	277	285	359	273	1	355	3	401		717
-	Time Over District				21 25	1.05	26 1	1.30	26 1	1.05 30 2	1 25	1 13 26 9	1.10	1 10 28 2	2 00		3 20

Special Rules.

West bound trains are superior to east bound trains of the same class.

No. 27 is superior to all other trains. Opposing first class trains will clear Nos. 25 and 27 five (5) minutes.

Other opposing irolns will clear Nos. 4, 25 and 27 ten (10) minutes.

All west bound trains must be clear at the time Nos. 25 and 27 are due to leave the next station in the rear where time is

Sent bound trains must be clear at time No. 4 is due to leave next station in rear where time is shown.

Double track between Exercit Jcf. and Interbay and between G. N. Dock and Seattle.

No. 25 meets Nos. 25 and 715.

No. 357 meets No. 4.

No. 258 meets No. 4.

No. 717 meets No. 4.

No. 727 meets No. 273, 358 and 278.

No. 273 meets No. 273, 358 and passes No. 717.

No. 25 passes No. 718. No. 2 on double track between Everett Junction and Interbay.

Nos. 1 and 355 meet No. 2 on double track between Everett Junction and Interbay.

No. 357 meets No. 360 and No. 270 meets No. 235 or double track between G. N. Dock and Seattle.

All trains will be here used to 8 miles perhaps to seing through town limits of Edmonds and Ballard.

Control Manual Block S. st. an is no geration between G. N. Dock and Letchay.

Trains untering louble with at Except Jet, and Interbay and G. N. Dock and Seattle will not exceed speed of ten miles perhour.

Ballard, Edmonds and Multimond B. sch will be flast, stop for 277 and 278.

Mile post 10 south of dishmond B. sch will be flast, stop for 277 and 278.

Trains I and 2 vill stop at stations between Tacoma and Scattle to pick up or let off passengers for or from points east of Scattle couplying with N. P. time table schedule.

phylog with N. P. time fable ed., 1912.
No. 2 will stop at Adria at lock off passengers from points Everett and west.
Bollard will be flag upp for No. 2 to take passengers for Spokane or points east of Spokane.
No. 26 will stop of flag at my station to pick up passengers for cast of Everett.
All Great Northern Trans between Settle and Vancouver, Wash., will be governed by time table and rules of Northern Pacific

All Great North on trains before a Vancourar, Wash, and Portland will be governed by time table and rules of Spokane. Portland

& Seattle Railway.
Yard limit boards cost of Ballard covers limits to Scattle.
Bulletin boards are located at Interbay and Scattle.

Seattle for trains Nos. 360, 4, 270, 358, 286, 278, 2, 26, 28, 356.
Interbay for trains Nos. 718, 102.
Expert J. 4. for trains Nos. 27, 357, 3, 285, 277, 273, 359, 1, 355, 25, 401, 717.
TERMINAL STATIONS.

RMIARI STATIONS.

Inturbay for trains Nov. 401 and 717.

Beattle for trains Nov. 27, 357-3, 285, 277, 359, 273, 1, 355, 25.

Everett Jet for trains Nov. 360, 4, 276, 358, 286, 278, 2, 28, 28, 358, 402, 718.

DERAIL SWITCHES.

Mukilteo Lumber Co., Spur, 144 feet from head block

Richmond Beach, 120 feet west of H. B. Industry track.

Interlocking Plant Baskule drawbridge 500 feet west of Ballard.

Distant signals are located 4000 feet east and west of draw span and work from zero to 15°.

Home signals are located 600 feet east and west of draw span and have two arms. Top arm works from zero to 90 . Lower arms fixed denoting home signal.

Derails are located 55 feet inside home sign ils.

INTERLOCKING governing N. P. Ry. Crossing just west of Interbay yard:

Westbound home signal is located 300 feet case of crossing. Exclosing home signal is located 300 feet west of crossing. Both home signals have two urns. Top arm works from zero to 90 degrees up and is semi-automatic. Lower arm is fixed and denotes home

Details are located 55 feet in advance of home signal. Distance signal earthound is located 3000 feet from carthound home signal and works zero to 45 degrees up and is automatic. Details and dwarfs signals on G. N. yard track are 150 feet from carthoung east and

Details on N. P. track are located 250 feet from crossing, with dwarf signal 5 feet from them

Printed instructions posted in cabin for the operation of this plant. Cabin is locked with a G. N. switch lock and N. P. switch lock, so training from both rouls will have keys to get into cable to operate plant.

Derail on N. P. transfer track near Glass Works Spur in operation. Derail is pipe connected with switch stand.

Trainmen using this switch should see that all cars and engines are clear of derail before closing switch.

Business Tracks Not Shown as Stations on Time Table.

NAME	LOCATION	OPENS	LENGTH	CAPACITY
Brown Bay Logging Co. Connection		West East West		10
Invincible Railjoint Spur Shipyard Spur Standard Oil Co. Spur	0 1 miles west of Edmonds	West West West West	1200 2185	24 46
G. N. Clay Co. Spur	1 2 miles vest of Richmond Beach. 1.6 miles east of Ballard	West West	V	24 46 10 43

	EAST BOUND.					SEC	OND D	ISTRICT-	EVER	NUL TT	CTION 1	TO SEAT	TLE.				
	T-11- N- 00	Die		1				FIRST	CLASS.						SECOND CLASS.	THIRD CLASS	
-	Inte Table No. 86.	ne irea	SIGNS.	26	360	4	270	286	358	278	2	28	356	402		718	
		8		Passenger	Passager	Passuger	Passenger	Passenger	Passenger	Passeng r	Pantuger	Lapress	Paretter	Fast Frogat		fide Trans	
	STATIONS.	F		Arnive Dails	Arriva Dail:	Arriva Dally	Dally	Date Ex. Sun.	Arrive Bally	Dan Ex Sun.	Arrive Daily	Arrive	Azmen Dest-	Army D il		1.	
1	EVERETT JUNCTION	32.7	R DN P	8-40As	9 16Am	11 59An	1.18fm	5.90Pm	5 35h	6 50hn	8 30Pm	15 80AL	1.05An	12 104		5 1034	-
ı	MURILTEO	25 9	D P	8.81	9.05	11.53	. 1 10	1 5.11	5.28	. 6.40	8 23	12.23	. 12 55	11 65		8 11	
I	MOSHER	24.8	P	8.93	1 8.59	11.46	1 01	1 5 01	8 92	1 6 81	8.16	12.16	1 12.45	11 40		7 13	
I	MEADOWDALE	21.8	D P	8.17	f 8 51	11.41	1 12 55	.1 4.55	5.17	1 8 24	8.11	12.11	1 12 87	11 80		7 25	
I	EDMONDS.	17.9	D WP	8 10	. 8 13	11.35	1 12 47	1 4 47	5 11	. 6.16	8 00 8	12 04/2	, 12 29	11 20		7 00	-
I	RICHMOND BEACH	14 9	D P	8.03	. 8.83	11 30	. 12.37	4.38	5.04	. 6 09	8 00	11.59	1 12 20	11 05			-
ľ	BALLARD	4.8	D	7 49	* 8 17	11.17	12.91	f 4.19	4.62	. 5 50	7 47	11 44	19 03As	10 35		6 25	
ľ	INTERBAY	6.7	R. DN WCTOP	7 44	. 8.14	11.14	12.15	1 4.15	4.49	5.46	7 44	11.10	. 11 59	10 307			
-	a. N. DOCK	3.4	DN I	7.40	8 10	11.10	12.15	1 4 10	4 45	5 40	7.41	11 15	1 11 65	10 30/1		5 10As	-
	SEATTLE	0	R DN I PI	7 30kg	8 004	11 00kg		4 00fm	4 35h	5 30m	7 806	11 25%					
ſ	SEATTLE	187.1			2 7 7 7	- 11 304	11 100	1 50111	3 4 15ta	0.00/m		District Control of the	11 15Ps	542. Total			
ŀ	TACOMA	142 4						·	8 00 9 00ha		1 7 10Pa	11 10/a	7 35 7 30				_
ŀ	pd#YLAND							-			5 45Pa	10.00ha					_
٥.	The Property of the Paris Test	.0		Leave Daily	Leave	Late Daily	Leave Daily	Leave	Lta: +	Lane	Loren	levet.	2 30ha				
i					Daily			Duly Es. Sun.	Daily	Daily E. Sun	D.ily	Dail,	Dail	Dallo		Ба	
	Total Control Department			26	360	4	270	286	358	278	2	28	358	402		718	
	A Trace Very Planty			27.0	1 16 25 7	33.0	1 13 26 9	1.20 24.6	32 7	1.20	1 60 32 7	1 05 30 1	26 6	1 ±0 16.5		1 107	

Automatic Block System.

Automatic Block dignals are in operation between King Street Station, Scattle, and Everett Jet.

Trains must not exceed a speed of 8 miles per hour over drawbridges and interlocking plants.

Three position train order signals Everett Jet. When at 45° indicates 19 order.

Trains will not exceed speed of ten (10) miles per hour through Scattle Tunnel.

Interlocking Signals.

Within the limits of the Anomaire Block Stand 2 stem interlocking Plants are located as folious SOUTH PORTAL OF SEATTLE TURNEL.
NORTH PORTAL OF SEATTLE TURNEL EVERETT JUNGTION.

Automatic Block Interlocking Signals and Semaphores

West Bound.

Everett Junction interlocking, westbound home signal (high line), is located 200 feet from westbound crossover switch, and has three arms; the top arm is for main line trains through crossover; the second arm fixed; bottom arm for diverging movements.

Westbound Home Signal, Coast line, is located fifty-five feet from east end of eastbound crossover switch and has three arms; top arm is for main line; second arm fixed; bottom arm crossover movements.

Distant signals, westbound high line and Coast line, are located 3500 feet from home signal, and work from zero to 45°.

First automatic signal westbound is 2500 feet west of Everett Junction. From first automatic signal to Scattle, they are located about 7500 feet apart.

G. N. Dock to Seattle first automatic signal westbound is located 500 feet from G. N. Dock; second 3000 feet; third signal is distant signal for North Portal Interlocking Plant.

East Bound.

First automatic signal castbound is located 3000 feet from eastbound home signal, North Portal; second 5000 feet from first one, next signal is Manual Controlled Block for G. N. Dock.

From Ballard and Everett Junction, signals are about 7500 feet apart, to Home signal for interlocking plant at Everett Junction. Eastbound home signal, Everett Junction Interlocking is located 200 feet from west and of castbound crossover switch and has two arms; top arm is for main line to St. Paul, lower arm for crossover up the Coast line.

Semaphore at G. N. Dock for eastbound trains and at Interbay for westbound trains will be used for manual controlled block.

For Further Instructions and Diagrams see page 15.

THIRD DISTRICT-EVERETT JUNCTION TO BELLINGHAM.

SOUTH BOUND.

THE	IRD CLASS.		SECOND CLASS.			FIRST CLAS	is.			Capa	City of Tracks		The Little of th	
	717	713	711	401	355	273	359	277	357	rack.	4	1.	Time Table No. 86.	
	Mdse Freight	Mose Freight	Fast Freight	Fast Freight	Past nert	Passenzer	Parenter	Passager	Passenger	T.	ē.	4		
	Leave Dully	Leave Daily Ex Sunday	L-ave Daily	Daily Daily	Dair	Leave Dail;	Leave Duly	Date Er ben	buty	P.	ŧ	11	STATIONS.	
			5 20fm		6 07fm	2 48Au	12 05fm	6 50An	3 20An	119	110	0.0	BELLINGHAM	-
			6 00		. 6.21	s a oa	12 15	. 7 03	9 99	10	143	2.9	SOUTH BELLINGHAM	
			6 28		6 28	1 3 13	12 25	1 7 12	3 50	31	16		SOCKEYE	
			6 50		6 36	3 23	12 36	1 7 22	4 05	61	,	12.5	samish	
						. 3.28		7 25			5	11.2	BLANCHARD	
			7 09		6.42	. 3 35	12 42	7 32	4 15	62	16	14.6	Bow.	
			7 30		6.45	3 45	12.48	. 7 40	4 95		6	21.2	BELLEVILLE .	
		714-360 11 50Am	8.15		s 6 55	s 3 55	. 12.55	. 7 52	4 48	63	239	21.5	BURLINGTON	
		12.30m	8.35		1 7.07	4 05	1 06	s 8 03	5.00	87	63	27.0	MT. VERNON	
- -		1.16	8.55		7.17	4 16	1 16	. 8.14	8 16	61	13	31.4	. řík	
						4 19		8 18			6	35 0	MILLTOWN	Г
- -		2.22	9.20		7.28	4 29	1 25	. 5 30	5 35	61	45	40 4	STANWOOD.	П
		2.55	9.50		7.37	. 4.40	1.33	8 44	6 50	10	14	45.7	SILVANA	_
		3 30	10 80		7 45	1 4 50	1 40	1 8 55	6 02	92	17	50.6	ENGLISH	Г
		4 10	11.16		7.85	5.06	1 50	9 10	6 21	90	30	57 0 JE 5	MARÝSVILLE	
	3.35Pm	4.30fm	11 30 M	2 05ks	8 01	6 12	1 56	9 18	6 30			59 : 2	DELTA'NYE	Г
	3.40			2.10	8.04	5.16	1 50	9 22	6.85	41		99.7	LONG	
	8.50			2.20	. 8 15	. 5 35 5 32	. 2 08	9 30	6 5 5	110	180	61.1	Cohir	
	4 00fm			2.30An	8 20fm	5 35m	2 10hm	9 35An	7 00km			64.1	EVERETT JUNETION	
	Arrive Daily	Arrive Daily Es. Sunday	Arrive Daily	Arrive Daily	Arrive Delly	Arris e Daily	Arrive Duly	Ded Ex. 200	Daily					
	717	713	711	401	355	273	359	277	357					
1 1_	0.25 10.5	7.40	10.	19 6	2 1J 28 9	24 0	30 K	313	17 1				A const Board Per Bour	

All trains will reduce speed to 8 tailes per hour passing through town limits of Marysville, Mount Vernon and Burlington.

Side clearance Tunnel 20, one-quarter mile south of Sockeye, not good. Clearance four feet, standard six feet.

Register for Delta Wye is located on ground floor interlocking plant.
Bulletin boards are located at Burlington and Bellingham.
Korman, one mile north of Silvana is flag stop for Nos. 277 and 278.
Steam whistle signals for tracks with switches controlled from Delta Wye Inter-

Main Liue—One Long.
Delta Yard from North—One Long, One Short.
Delta Yard from South—Two Long, One Short.
Delta Yard Korth—Two Long.
Delta Yard South—Three Long, One Short.

Semaphore located 1200 feet south of south switch South Bellingham.

Yard limit extends from yard limit board north of roundhouse Bellingham to yard limit board south of South Bellingham.

Yard limit boards placed each direction Burlington.

All trains will reduce speed to 8 miles per hour over all draw bridges and Interlocking Plants.

Everett yard limits includes Dalta yard and from North end of Draw Bridge 11 to yard limit board south of Everett Junction.

Special Rules. South bound trains are superior to north bound trains of the same class.

INITIAL STATIONS. Blaine for trains Nos. 711 and 720.

Deline for train No. 713 and 720.

Burlington for train No. 732.

Delta Wye, for trains Nos. 712, 714, 717, 491

Everett Jet., for trains Nos. 270, 358, 360, 386, 278, 718, and 102

Fraser River Jet., for trains Nos. 386 and 398.

New Westimpster, for train No. 385. Vancouver, for trains Nos. 359, 355, 273, 357, 397 and 719. Bellingham, for train No. 277.

TERMINAL STATIONS.

RMINAL STATIONS.
Blaine for trains Nos. 712 and 719.
Burlington, for train Nos. 714.
Burlington, for train Nos. 711, 713, 718, 402.
Delta Wee, for trains Nos. 359, 355, 273, 357 277, 401 and 717.
Everett Jet., for trains Nos. 355 and 397.
New Westminster, for train No. 366.
Yaneouver, for trains Nos. 270, 356, 358, 360, 395 and 720.
Bellingham, for train No. 278.

DERAIL SWITCHES.

BERRIL SWITCHES.
Skajit Grossing, English Log Spur, Hayes Derail: Mt. Vernan, Pacific N. W.
Traction Co. Transfer.
Sockeye, east end siding.
B. B. & E. Transfer Track east end.

Trains will not exceed six (6) miles per hour on coast line track over 24th St. near Everett Flour Mill; California St., Hewitt Ave. and Bond St. north and south of passenger depot, City of Everett.

INTERLOCKING SYSTEM. Governing movement of trains N. P. crossing and Bridge 10 just north of Delta Wye.

All south bound frains from Vancouver will be governed by a two arm house signal boated 700 feet north of draw span. Top arm at 90 degrees up proceed to two arm house signal boated 30 feet north of N.P. crossing, top arm at 90 degrees up proceed to Bayside, lower arm 90 degrees up proceed to Delta yard. A vantom fixed signal is located 2300 feet north of two arm home signal.

Train movement from Bayside to Vancouver will be governed by top arm on two arm home signal located of feet south of wye switch and by two arm home signal located on traits 500 feet south of draw span. A caution fixed signal is located 2000 feet south of ways pan. A caution fixed signal is located 2000 feet south of ways pan.

Train movements from Delta to Vancouver will be governed by top arm on towarm home signal located 60 feet east of wys switch, and by two arm home signal located on treatle 500 feet south of draw span.

located on treatle 500 feet south of draw span.

Trains between Delta and Bayeske will be governed by bottom blade on two blade semaphore bocated 60 feet cast of wee switch.

Taterlocking extern in use bridge 10, 11 and 12 between Delta and Maryaville and it shart it it. Crossing one mile south of Fir.

Interlocker at Drawbridge No. 36 one mile north of Mt. Vernon. Derails are located 500 ft. from end of draw span. Distant signals are located 2,000 ft. from home signals. Home semaphore, standard indications. Distant signal, fixed caution indications.

Interlocking Plant at crossing of Pacific Northwest Traction Company just north of Burlington. Home signals are located 205 feet north and south of crossing. Derails are located 55 feet inside of home signals. No distant signals in connection with this Interlocking Plant.

NORTH BOUND.

THIRD DISTRICT-EVERETT JUNCTION TO BELLINGHAM.

Time Table No. 86.	4.3	100				IRST CLAS	S.	SI	COND CLASS.	THIRD	CLASS.
In Effect January 10, 1816.	nce from	SIGNS.	356	360	270	358	278	712	402	714	718
examinus	35		Passenger	Passenger	Passenger	Passenger	Passenger	Fast Freight	Fast Freight	Mdse Freight	Mdss. Freigh
STATIONS.	04		Armys Daily	Daily Daily	Arrive Daily	Daily	Arrive Daily Ex. Sunday	Arnye	Arrive Daily	Arrive Daily Ex. Supday	Arrive Daily
BELLINGHAM	64.1	R. DN CWTKP	4.10km	s 12 30m	. 4 00m	. 7.50fm	. 9.45Pm	8 35 Am			1
SOUTH BELLINGHAM	61.2	D OW P	4 4 00	· 12 15	. 3 40	. 7.82	. 9.99	8 20			
SOCKEYE	57.2	P	1 3 50	f 12.01Pm	3 33	7.24	1 9 20	8 05			
5.6 SAMISH	51 6	W P	8 30	11 48	3 23	7.15	1 9.10	7 50			
BLANCHARD	50.9	P		. 11 45			1 9.08				,-
	47.5	D P	8 20	11.37	0.10	7 09	. 9 08	7 32			
BELLEVILLE	42.9	D P	1 3 10	. 11 27	3.07	7 00	. 8.58	7 10			
BURLINGTON	40.3	R DN COWYXP	. 3 00	11 20	. 3.02	. 6 55	. 8.47	7 00		71 i 11 30 Au	
MT. Vernon	36.2	DN P	s 2.45	11 03	9.47	. 6 42	· 8 35	6 10		11 03	
	30.8	D P	. 2.30	10.46	. 9 86	6.38	. 8.20	5 55		10 20	
MILLTOWN	29.1			. 10.38	1 2 31		. 8.15			10.00	
STANWOOD	23 7	DN P	2.15	10 28	. 2 22	6.23	. 8.05	5 35		9 40	
SILVANA	18.2	D W P	. 2 00	• 10 13	. 2.10	6.14	. 7.66	5 10		8 44	
	14.1	P	f 1.49	f 10.01	2 02	6.07	7.45	4 50		8 10	
MARVSVILLE	7.1	DN P	1 34	. 9 48	359 1 50	5.58	. 7.25	4 15		7.40	
DELYA'WYE		R DN IY P	1.23	9.38	1.38	8 80	7 10	4 00km	12 40to		9 10An
Lonn'doing	3.4		1 20	9.35	1.35	5.47	7.07	4 004	19 95	7 00Am	
e ddrr	0.4	P	. 1.15	. 930	1 80	. 5.42	1 7 00		12 15		9 00
EVERETY JUNETION	0.0	R DN P	1 054m	9 16An	1.18Pm	6 35h	8 50An		12 104		8 50
			Leave Daily	Leave Daily	Leave Daily	Leave Daily	Leave Dudy Ex. Sunday	Leave Daily	Loave Daily	Leave Daily	8 45 Am
			356	360	270	358	278	712	402	714	718
Time Over District Average Speed Per Hour	-		3 05 21 0	3 14	2 42 23 7	2.15	2 55 21 9	4.35	10 6	1 70	0 25

Read carefully rules covering operation Electric train staff block, pages 14 and 15.

Electric train staff block system between Delta Wye and Marysville.

Automatic Block Signals in operation between Everett Jet, and Delta Wye and between Marysville and South Bellingham.

Normal position of gates at crossing of third and fourth districts at Burlington will be against fourth district trains. Not necessary to stop for crossing when gates are set against opposing district.

First class trains will register by eard at Delta Wye Except when running in sections conductors will register in person. South switch Excrett passing track is located 300 feet north of station platform.

Track lying to the north of crossover between roundhouse and depot Bellingham will be known as passing track.

Business tracks not shown as stations on time table.

NAME	LOCATION	OPENS	LENGTH	CAPACIT
Bound Shingle Co.'s Spur Bound Shingle Co.'s Spur Hells tille Pit	2.1 Miles south of Fir. 2.5 Miles north of Stanwood Stanwood opens of Industry track 1.4 Miles south of Stanwood 1.5 Miles south of Stanwood 1.8 Miles north of Silvana	North North South North South South South South North South North South North South North South North South		38 30 6 80 5 6 8 5 6 8 7 2 4 2 2 6

Business tracks not shown as stations on time table

NAME	LOCATION	OPENS	LENGTH	CAPACITY
og Dump Spur Jark Nickerson Mill	1.4 Miles north of Marjaville 1.5 Miles south of Marjaville 1.5 Miles south of Marjaville 0.8 Miles north of Long Siding 0.4 Miles south of Long Siding 0.0 Miles south of Long Siding 1.0 Miles south of Long Siding 1.1 Miles north of Long Siding 1.1 Miles north of Everett 1.0 Miles north of Everett 0.7 Miles north of Everett	North South South North		2 1 6 30 14 7 20 80 7 21 31 26 4 24 38

		PAUND
9	SOUTH	BOUND.

THIRD DISTRICT-VANCOUVER TO BELLINGHAM.

THIRE	CLASS.	SE	COND CLAS	is.	 FIRST C	LASS.			Side T	racks		No. 86.	3
Inine	719	711	385	397	355	273	359	357	1	1964	from	In Effect Jan. 10, 1915.	Telearraph Calls
					Passenger	Passenger	Passenger	Passenger	7	3	- Been	STATIONS.	-
	Mdee. Freight	Fast Freight	Mixed	Mized Leave Daily	 Leave Daily	Leave Daily	Leave Daily	Leave Daily	2	8	d.	SIATIONS	
	Leave Daily	Leave Daily	Leave Daily Ez. Sunday	b.s. Sunday I	 4 00hn	12 15Pm	10 00km	12 304	1 23	319	-	VANCOUVER	`
	7 30An			2 00Am	 4 00hn		10 04	19 35			0.7		
	7 35			2.05	 	12.20			-			STILL CREEK	
	7.50			1 2 13		1 19 97		1 12.42	-		5.3	1.9	-
	8 00			1 2.17	4 16	1 19 39	10.16	f 12.47	-			BURNABY	
				1 2.24	4 23	1 19.38	10 32	1 12 53	-	15	7.9	SAPPERTON WYE	
	8 10		-		1 1 1 1				-	-	12 9		-
				160	4 32	1 19.48	10.33	1 03	27	35	11.1	SAPPERTON	_
	8 40				 1 4 35	12.53	. 10.05	. 1 10		17	13.8	NEW WESTMINSTER	-
	8 50		1.00m	2.45	 	12.68	10 40	1 15		1	11.2	FRASER RIVER JCT.	
	8 55		1 10m	2 50fm	 4 40	-	10 48	1 1 95	64		19.4	TOWNSEND	
	9 10				 4 48	1 1 07		1 1 95	29	58	24.5	COLEBROOK	
	9 40				1 4 58	1.17	1 10 67		-	10	28 4	CRESCENT	1
	9.50				5.06	1 26	11 06	1 1.40	-			WHITE ROCK	
	10.30	-			. 5 1520	1 38:20	. 11 16	9 3 00	70	22	33 2	INTERNATIONAL BOUND	
	10.00	-	-					-	-	-	35 2	BLAINE	1
	-		-	-	. 8 30	. 2.00	11 97	. 8 30	62	124	36.7		-
	11 00km		-	-	8 49	. 9 15	11 30	2 40	10	3.1	44.2	custer	-1-
		3 50	-			1 2 21		r 9 46			46.3		
					 	. 2.28	1 11 47	1 2 55	70	23	49 4	FERNDALE.	
		4 14			 1 5.51	-	-	3 00		31	52 0	BRENNAN	
					 	1 2 33				_	-	4.5	1
		5.00fm			. 6.07h			Arrive			-		-
	Arrive Daily	_	Arrive Dail Ex. Sunday	ily Arrive Duly Ex. Sunday	Arriva Daily	Daily	Daily	Daily	-		-		-
	719		385	397	355	273	359	357			-	Firm Over District	
	3 30	1 40	.10	16 6	2 07 27 8	23 0	2 03 26 2	2 15	1			t -rec St -d Per Hour	-

Special Rules.

South bound trains are superior to north bound trains of the same class.

Double track between Still Creek and a point one and one-half miles north of Sapperton. Normal position of switch at Still Creek is for southbound trains and at point one and one half miles north of Sapperton for northbound trains.

at Still Creek is for southbound trains and at point one and one half miles north of Sapperton for northbound trains.

The normal position of switches at Colebrook Junction, Guichon Line Junction and Fraser River Junction will be for main line.

Ocean First, between White Rock and Crescent, will be fing stop for trains 270, 273, 295 and 296.

Ferndale will be fing stop for 385 for passengers from Everett and south of Everett.

Custer will be fing stop for 385 for passengers for south of Seattle.

Custer will be fing stop for 385 for passengers for south of Seattle.

Semaphores for protection of draw on Fraser River bridge between Fraser River Junction and New Westminster are located so south an arrive ends of bridge.

All trains will end to draw on Fraser River bridge between Fraser River Bridge and will not proceed until clear simal is displayed and will not exceed a speed of six miles per hour over this Bridge. All trains will reduce speed to 8 miles per hour over all other drawfridges and over all Interlocking Plants.

Trains must not exceed speed of ten miles per hour over Brunette Street at Sapperton.

All trains will reduce speed to 8 miles per hour over Brunette Street at Sapperton.

All trains will reduce speed to 8 miles per hour over Brunette Street at Sapperton.

All trains will reduce speed to 8 miles per hour over Brunette Street at Sapperton.

Yeard limit boards at Bellingham, Blaine and Vancouver.

Yard limit boards at Bellingham, Blaine and Vancouver.

Yard limit boards at Sapperton Sand Pli North of Wye, covers limits to Fraser River Junction.

Bulletin boards are located at Bellingham and Vancouver.

Trains 359, 270, 355 and 358 will register by eard at Colebrook.

DERAIL SWITCHES. Ferndale, 200 feet from east head block passing track.

New Westminster Interlocking System.—Signal tower is located 3,091 feet north of north end of Fraser River bridge, opposite crossing of the C. P. Ry. This apparatus controls the crossing of the C. P. Ry. also switches leading to and from the Fraser River crossing of the C. P. Ry. also switches leading to and from the Fraser River crossing of the C. P. Ry. also switches leading to and from the Fraser River crossing of the C. P. Ry. also switches leading to and from the Fraser River crossing of the C. P. Ry. also switches leading to and from the Fraser River crossing of the C. P. Ry. also switches leading to and from the Fraser River crossing of the C. P. Ry. also switches leading to and from the Fraser River crossing of the C. P. Ry. also switches leading to and from the Fraser River crossing of the C. P. Ry. also switches leading to and from the Fraser River crossing of the C. P. Ry. also switches leading to and from the Fraser River crossing of the C. P. Ry. also switches leading to and from the Fraser River crossing of the C. P. Ry. also switches leading to and from the Fraser River crossing of the C. P. Ry. also switches leading to and from the Fraser River crossing of the C. P. Ry. also switches leading to and from the Fraser River crossing of the C. P. Ry. also switches leading to and from the Fraser River crossing of the C. P. Ry. also switches leading to an all the Fraser River crossing to the C. P. Ry. also switches leading to an all the Fraser River crossing to the C. P. Ry. also switches leading to an all the Fraser River crossing to the C. P. Ry. also switches leading to an all the Fraser River crossing to the C. P. Ry. also switches leading to the C. P. R

Interlocking plants are in use on bridges 69 and 70 between Crescent and Colebrook. Home signals and details are located 600 feet north and south of both bridges. The caution fixed signals are located 3000 feet from home signals. All signals have standard Indications.

Interlock system used on bridge 64, 1,000 feet south of Ferndale. Derails located 55 feet in advance of home signals. Standard

Interlocking plant at Ardley B. C., governing movement of G. N. Ry., trains and B. C., Electric Railway Company trains:
Northbound home signal is located 558 feet from crossing and has two arms. Derail is 38 feet ahead of signal. Northbound distant
signal is located 2000 feet from home signal and is automatic. Southbound home signal is located 558 feet from crossing and has two
arms. Derail is 58 feet ahead of signal. Southbound distant signal is located 2000 feet from home signal and is automatic. Both
home signals on B. C., Electric line are located 558 feet from crossing and have two arms, with derails 58 feet ahead of signal. Dictant signal is located 2500 feet from home signals and the normal position is 45 degrees up. Distance signals work from 15 to 50
tant signal is located 2500 feet from bome signals and the normal position after home signal is cleared to 90 degrees. All
signals are standard upper quadrant.

THIRD DISTRICT-VANCOUVER TO BELLINGHAM.

				-			FIRST	CLASS.	SE	COND CLAS	is.	THIRD CLASS.
Time Table No. 86.	Calls		SIGNS.		356	360	270	358	398	386	712	720
In Effect Jan. 10, 1915.	da .	the fro	See Rule 5, pa	ge 15.	Passenger	Passenger	Passenger	Passenger	Mixed	Mized	Fast Freight	Mdse. Freight
STATIONS.	Telegr	Distance		1	Arrive Daily	Arrive Daily	Arrive Dally	Arrive Daily	Arrive Dady Es Sunday	Arrive Daily Ex Sunday	Arriva Daily	Baily
VANCOUVER	VN	55 8	R. DN WC	OPK	719	s 3.30fm	s 6.80fm	10 00hn	11.25As			4.10fm
0.7 WYB		58 1		Y	7.15	8.20	6 98	9 53	11.20			4.04
STILL CREEK		85.3		P	1 7.07	1 8 12	6 17	9 47	1 11 12			3.50
ARDLEY		53 5		P	1 7.02	1 3.07	6 18	9.43	1 11.07			3.45
BURNABY				P	1 8.55	1 2.59	6.08	9.37	1 11.00			3.35
SAPPERTON WYE		80.9			0.00	1 2.00						
		45.9	w	y PK		1 2.42	5.59	9.96	1 10.47			3.15
SAPPERTON	_	45.7			1 6 44		. 6.60	. 9.94	10.45	. 11 10An		2.55
NEW WESTMINSTER	MN	45.0	R DN	PKI		9.40	-	9.18	10.40m	11.05As		³⁹⁷ 2 50
PRASER RIVER JCT		44 6			6.85	2 30	8.81					2.35
TOWNSEND		3v 4		Р	1 6.25	1 3 30	5 44	9 10	 		-	2 10
соымкоок	o	34.0	R DN W	Y P	6.12	. 2 10	1 5.85	1 9 00	 -		-	1.55
CHESCENT		30.4			1 6.00	1 2.02	1 5.95	8.50	 			273
north kock	WR	25 6	DN	P	s 5.50	. 1 40 27	355	8.40	-			1 35
WIERNATIONAL BOUND		22.6										
m2Am	BN	22.1	R DN 1	TW PO	5 15	1 25	4.40	1 8.95			10 25Am	12 40h
colden	eu	10 0	D	Р	. 4 54	1.10	4.25	8 10		-	10 06	
					4.46	1 1.09						
PERROALE	FD	9.0	D	P	4.40	1 12 55	1 4 14	8.03			9.40	
BRINNAN					4.29	1 12 47						
BELLINGHAM	нм	0.0	RODN C	W TPI	4.15Am	12.35fm	4.00Pa	7.50fm		Date Ball	9 00As	Leave
					Leave Daily	Leave Daily	Leave Daily	Daily	Leave Daily Ex. Sunday	Ez. Sunday		Daily
		1			356	360	270	358	398	386	712	720
Time Over District					3 15 17 8	2 55 20 2	2.30 23.5	2 10 27 2	18.45	6.05	15 8	3. 10 16 8

Track lying to the north of crossover between roundhouse and depot, fielling-ham will be known as passing track.

Business tracks n	ot shown as stations on time ta	ble.		
NAME	LOCATION	OPENS	Leagth	Capa
Anddoughs-Shaw Rour	0.7 Miles north of Ardley	South	1	1
Volla Sour			***	
Mill No. 2 Spur	U. I billes south of Durbay	Portion.		
em ito. 2 byan	3.0 Miles north of Sapperton.	Bouth	1	
Taight Spur	2.3 Miles north of Sapperton.	South	450	
Bradley and Taylor	1.5 Miles north of Sapperton.	Bouth		
land tile Cours	0.7 Miles north of Sapperton	South		18
nt .tm 6	0.0 Miles porth of Sapperton.	South		31
Manhan Lumber & Longing Spur	1.0 Miles south of Lowinsend.	Dones	630	
Notice Co Pour	0.8 Miles south of Townsend	North	1	
			2450	36
Samphell Lumber Co. apur	1.9 Miles south of Blaine	Bouth	1	
Staine Spur	2.0 Miles south of Blaine	South		9
Blaine Shingle Co. a Spur	2.0 111101 20010 01 21211	Bouth		2
Shelton Spur (off Blaine Spur)				
City Dock Spur (of Blains Spur)			1	. 6
Brie Mill Bour (off City Dock Spur)			1	
Monarch Mill Bour (off City Dock B	pur). 0.0 Blaine	South	1	
Barge Spur (off City Dock Spur)	U.U DIMDE	Bouth	1	
McDonald Spur	1.2 Miles north of Custar	South	1	
Enterprise Spur	0.7 Miles north of Enterprise.	Bouth	1	
			1	
		Bouth	1	
				1 5
Marietta flour	2.3 Miles north of Bellingham	. pourp	1111	-

10	WEST	BOUND						FOU	RTH	DIS	TRICT-ANACORTES TO	RO	CKPO	RT.						E/	AST BOU	JND.
THIRD	CLASS.			FIRST	CLASS.			Capac Side T	ity of Tracks								F	IRST CLASS	5.		THIRD	CLASS.
723	725	283	293	291	289	295	279	racks	4	Irom	Time Table No. 86.	Ė	from	SIGN		290	280	292	294	284	726	724
	Mdse. Freight	Passenger Leave	Passenger	Payenger	Paswnier	Presencer	Passenger	T Julian	ber Tr	chport		legraph	tance contr	Hul 'i,	pag- 15	Рамендет	Passenger	Passenger	Passager	Paramer	Mile Freight	Md+ Fr
pr Sunday	Leave Daily Except Sunday	Daily	Leave Daily	Lave Dady Early Sunday		Sunday Only	Leave Daily Except Sunday	2	5	Då	STATIONS.	Ĕ	P P			Est pr Sand	Arm of Daily	L pi Sand	Dail:	Bac	Lar Jo Sand	Am De
7.00Am					4 45hm	9 40Am	6.15An	39			ROCKPORT	RK	53 7 N	D 1	w	s 1 30Pm	. 8 50Pm					4 400
7.20					5 00	1 9 53	1 6.28	16		5.8	., FABER		47.9			1 1 12	1 8 35					4 10
8.10					5 10	10 03	. 6 88		83	9.1	CONCRETE	BA	44.6	D		. 1 00	. 8 27					3 30
8.45					1 5 14	1 10 06	1 6 41	39	76	10 2	GRASSMERE		43.5		w	f 12 50	f 8 10					2 40
9.18					5.26	10.17	. 6.58	41		15.5	BIRDSVIEW		38.2			. 12.08	. 8 07					2 15
9.45					. 5 38	10.28	7.04	35	9	20 6	HAMILTON	н	33 1	D	w	. 12 26	. 7 56	-				1 40
10.05					5.48	. 10.87	7.12		25	23 9	LYMAN	MY	29.8			. 12 16fm	. 7 46					1 10
10.25					1 6 00	1 10 47	1 7.21	21		29 2	COKEDALE JUNCTION		24 5				1 7 34					12 40
10 45	8 80Am				. 6 11	10.57	736 7.30	42	63	32.4	SEDRO-WOOLLEY	WL	21 3 8	D	ĸ		. 7.00	T			7 30Am	19 20
					1 6.17	1 11 02	1 7.35			34.7	STERLING		19.0				1 7 17				/ SUA	10 21
11-10km	8 50 10 55 294	7.15hm	11.30ks	8.85Am	. 9.30fm	11.10Am	. 7 45An	63	226	37.2	BURLINGTON	BU	16.5	DN (co wyx		7 10Pm	. 7 454s	. 10 654m	s 6 257m	7 10 6 16	12 01
	11.10	7.94	• 11.38	8 43					16	40.0	2 5 AVON		13 7					7 36		6 14	6 00	
	11.20 f	7.88	1 11.45	1 8.51					7	42.6	FREDONIA		11.1					1 7 30		1 6 07	5 45	
	11.36	7.40	. 11 52	9.00					17	44 1	whitney		9.6					. 7 26		. 6 00	5 35	
										46.3	DRAW BRIDGE		7.4						10 00		0.00	-
	11.59	7.58	f 19.08m	1 9.15					3	49.5	FIDALGO		4.1					7 11	1 10.91	1 5 40	6 16	
	19.15An	8.10fm	s 12 20ha	s 9.25An					235	53.7	ANACORTES	AC		2 D	T W		-	7 00ks		-	-	-
mar Daily	Arrive Daily Escept Sunday	Arrive Daily	- Arrive Daily	Arnye Duly Encept Sunday	Acrive Duily Every Sunday	Arrive Sunday Only	Arrive Daily Except Sunday									L Daly Ex epi Sunday	Leave	Leave Daily	lo 104s	6 ann	L Dul	1
723	725	283	293	291	289	295	279								_	290	280	292	294	284	726	72
4 10 5 5	3.46	18 2	19.5	19 8	1 45	1 30 24 8	1.30	-	-		Time Over District Average Speed Per Hour					2 00	1 10	22 8	204	11.10	2 10	12.

Special Rules.

East bound trains are superior to west bound trains of the same class.

No. 723 has right over No. 724, Rockport to Burlington.
No. 283 and No. 284 will stop on flag at Fidalgo Mill Spur.
Normal position of gates at crossing of third and fourth districts at Burlington will be against fourth district trains. Not necessary Normal position of gates at crossing of third and fourth districts of performing the consting which gates are set against opposing district.

Yard limit boards are located at Burlington and Anacortes.

Bulletin boards are located at Anacortes, Burlington and Rockport.

INITIAL STATIONS.

Anacortes for trains Nos. 292, 294, 284 and 726.
Rockport for trains Nos. 279, 259, 296 and 723.
Burlington for trains Nos. 291, 293, 283, 290, 280 and 724.
Sedro-Woolley for No. 725.

TERMINAL STATIONS.
Anacortes for trains Nos. 291, 293, 253 and 725.
Rockport for trains Nos. 280, 290 and 724.
Burlington for trains Nos. 279, 259, 295, 292, 294, 231 and 723.
Sedro-Woolley for 726.

Trains must not exceed speed of 8 miles per hour over draw bridges and Interlocking Plants.

Interlocking Plant one half mile west of Sedro-Woolley at crossing of Pacific Northwest Traction Company. Distant signals are located 200 feet east and west of crossing and have one arm showing caution. Home signals are located 205 feet cast and west of crossing. Derails are located 56 feet inside of Home Signals.

Interlocking Plant just west of Burlington at crossing of Pacific Northwest Traction Company castbound distant signal is located 2000 feet west of crossing, has one arm showing caution. Home signals are located 55 feet each way from crossing. Derails are located 5 feet inside of home signals. There is no distant signal for westbound trains.

Business tracks not shown as stations on time table.

NAME	LOCATION	OPENS	LENGTH	CAPACIT
auk Spur	2.0 Miles west of Rockport	West		
ower Mill Co	0.3 Miles west of Faber	East	********	19
	0.5 Miles west of Faber	East		16
James Lumber Co. Seur	0.8 Miles east of Faber	West		10
Vachington Dark Council Co.	0.7 Miles east of Concrete			3 30 28
vakungton Port Cement Co	0.7 Miles east of Concrete	East		30
uperior Portland Cement Co. Spur		West	CONTRACT OF	28
urpee Shingle Spur	0.4 Miles west of Grammers	West	**	3
nna Shingle Spur	2.0 Miles west of Grassmere	West	Control of the	2
1. Spur	0.2 Miles west of Hamilton	West		
op Ranch Spur	0.8 Miles east of Lyman	West		3
kagit Mill Co. Spur	Lyman	West		22
litchock-Kelly	0.1 Miles west of Lyman	West		3
finkler's Mill	3.0 Miles east of Cokedale Jet.	Both Ends		7
orey Shingle Spur.	50 Miles cast of Sedro Woolley	West		2
reen Mill Spur	3.3 Miles east of Woolley	Both Ends		22
ound Iron Spur	Woolley	West		7
olbrook's Spur	0.4 Miles west of Woolley	West		
urlington Mill Spur		West		
swkin's Spur	0.7 Miles east of Fredoria	East	STREET, STREET	
	U.7 Pilles east of Fredoma	West	10.00 0.000 0.00	6
allahan-Abbott Spur	Fredonia			. 0
	5.9 Miles east of Anacortes	West		
og Rollway		Both Ends	********	21
idalgo Island Shingle Co. Spur		East		2
idalgo Mill Spur	2.3 Miles east of Anacortes	East		3

WES	T BOUN	ID.	FIF	тн і	DIST	RICT	-SUMAS TO GUICHON			EAS	T BOUN	D.	
	SECOND	CLASS.		Capac Side 1	ity of	1					SE	COND CLAS	s.
387	387	397	397	Tracks	4	2	Time Table No. 86.	Calls	from	SIGNS.	398	398	388
Mind	Mized	Mized	Mixed	1 1	6	4		10.00	Distance	See Rule 5, page 15	Mized	Mixed	Mirid
d Tour Sat	Tue and Fri	Leave Tuc.	Wed , Fri	2	8	å	STATIONS.	Į.	03		Thur Bat	Wed Fri	Arrive Dail E. Sunday
7 00km	5.30An					0.0	SUMAS, WASH	su	46.5	RDCW			. 5 45h
						0.0	INTERNATIONAL BOUNDARY		45.5				
7 03	. 5.89			26	3	0.1	HUNTINGDON		46.4	w			. 5 48
7.10	. 7:15			37	31	3.6	ABBOTSFORD	F8	42.9	R D W			. 5 30
7 80	. 7.80				7	5.1	PINEGROVE		39.4				. 5.05
7.65	. 7.55			62	31	12.7	ALDER GROVE		31.8	D			4.50
8.10	. 8.10			26		16 9	ofter		29.6				4.25
8.35	. 8 35			26 3 0.1 MUNTINGDO 37 31 3.6 ABBOTSFOR 7 5 1 PINEGROVI 62 31 12.7 ALDERGROV 26 18.9 OTTER 61 1b 21.6 LINCOLN 64 38 29.4 CLOVEDAL 4 33.4 ALLUVIA	LINCOLN		24.9	w			4.10		
D 004m	. 9.00Am	4.80fm	4 05fm	64	In Effect January 1	CLOVERDALE	CL	17.1	R D Y	8 80An	1 9 00Au	8.46P	
		1 4.45	1 4 20		4	33.4	ALLUVIA		10.1		8 15	8 40	
		4 50	1 4 25		4	34.9	SOUTHPORT		11.6		1 8 10	1 8 40	
		4.00	4 80			35.9	COLEBROOK JCT		10.6	Y	8 00	8 80	
		. 6.10	4 66	38	58	35.9	COLEBROOK	o	10.6	R DN W	7.55	8 25	100
-9		6.16	5.00		85.77	36.7	QUICHON LINE JCT			Y	7.45	8 15	
		1 8 40	1 5 95		9	42 7	INVERHOLM		3.8		7.25	1 7.55	
					2	45.1	CHALLUCTHAN		1.4		1 7.10	1 7 40	1
		# 00fm	. 6 46fm		10	46.5	GUICHON		0.0	w	7.00An	7 80As	
Bratte	THE TITE	With Bit	W7. Vit.								Leave Tue. Thur. Sat.	Leave Mon Wed., Pri.	Leave Da Ex. Sund
387	387	397	397								398	398	388
2 00	2.00 14.7	1 30	1.10				Time Over District Average Speed Per Hour				1.30	1 30	2 00 14 7

Special Rules.

West bound trains are superior to east bound trains of the same class.

The normal position of switches at Colebrook Junction, Guichon Line Junction are for main line.

All trains Fifth District will protect against all Third District trains between Colebrook Jet, and Guicht Line Jet.

Guichon for train No. 398 Sumas for train No. 387. Cloverdale for trains Nos. 388 and 397. Guichon for train No. 397. Cloverdale for trains Nos. 387 and 398. Sumas for train No. 388. Sumas for train No. 388. DERAL SWITCHES.

Derail switches must always be set for derail except when in actual use whether there are cars on the tracks or not.

Abbottsford east end of passing track.

INTERLOCKING governing B. C. E. Ry. crossing, Cloverdale, B. C. Distant signal on north side is located 2,500 feet from crossing and has one arm showing caution. Home signal is located 75 feet from crossing and bas two arms. Lower arm one indication, upper arm governs train novements. Home signal on south side is located 15 feet from crossing and distant signal 1,500 feet from crossing. Derails are placed five feet inside each home signal. Normal position of signals will be clear for our line.

Business tracks not shown as stations on time table.

NAME	LOCATION	OPENS	CAPACITY
Guichon Slip Spur Gowdy Road Spur Pattension's Spur Smith Road Spur Matthew Road Spur Gotebrook Road Spur Gravel Pit Spur Surry Spur Fernandge Lbr. Co. Spur Lincoln Lbr. Co. Spur Clark's Spur Otter Shingle Co. Spur Aldergrove Lbr. Co. Spur Fish Trap Pit Pinggrove Lbr. Co. Spur	5.7 Miles east of Guichon. 5.8 Miles east of Guichon. 6.8 Miles east of Guichon. 8.2 Miles west of Cloverdale. 3.3 Miles west of Cloverdale. 1.1 Miles west of Cloverdale. 1.4 Miles west of Cloverdale. 1.0 Miles east of Lincoln. 1.0 Miles west of Lincoln. 1.0 Miles at Ofter. at Otter	Enst West West West West West West West East East East Both West	3 1 9 2 3 5 9 3 15 30 2 15 20 40

NORTH BOUND.

	SECOND	CLASS.										SECOND	CLASS.	10
387	397	397	385	ings of	Car Capacity of Passing Tracks	River Jet.	Time Table No. 86.	90	a or "	SIGNS.	398	398	386	384
Missed	Mixed	Mixed	Mized	Capacity or Sidings	24	12		1	- ince	See Rule 6, page 15.	Mixed	Mixed	Mized	Mixed
Villa Bir	Thu. Sat.	Lave Mon., Wed., Fri.	Leave Daily Es Sunday	ਹੈਰੈ	32	Tage .	STATIONS.	i.	Die		Arrive Tue., Thur., Bat.	Armye Mon., W-d., Fri.	Arrive Daily Ex Sunday	Arrive Tue., Thur., Sat
	2 60fm	2 50fm	1 10Pm			0.0	FRASER RIVER JCT		20.3		s 10.40 km	s 10 40ks	s 11 05An	
	9 55	2.55	1.15			1.0	LIVERPOOL		19.3		10.80	10.80	10 55	
						3.3	PORT MANN		17.0	W 2 Miles South				
	1 8 90	1 3 20	. 200		18	9 0	PORT KELLS		11.3	D	1 10.05	1 10 05	10 16	
8 40Am	. 3 36	. 3 86fm	. 2 45An	64	38	15.2	CLOVERDALE	CL	5.1	R D Y	9 45	9 45An	9.55Am	4 20hn
8 55An	. 4 00hn				8	20.3	HAZELMERE		0.0		9.05An			4 .05fm
Thur Bat	Thur., Sat	Wed., Fri.	Arrive Daily Ez. Sunday								Leave Tue., Thur., Sat.	Leave Mon. Wed., Fri.	Leave Daily	Leave Tue, Thur., Sat.
387	397	397	385								398	398	386	384
- a. 4"	17 10	20.45	1 35 11 4				Time Over Dietrict Average Speed Per Hour				1 35 12 7	16.4	11 10	20 0

Special Rules.

South bound trains are superior to north bound trains of the same class.

INITIAL STATIONS.

Praser River Jet. for trains Nos. 385 and 397. Cloverdale for trains Nos. 386, 387 and 398. Hazelmere for trains Nos. 384 and 398. TERMINAL STATIONS.
Goverdale for trains Nos. 385, 384 and 397. Hazelmere for trains Nos. 387 and 397. Fraser River Jet. for trains Nos. 386 and 398.

River Jet. for frains Nos. 380 and 393.

Trains will register at Cloverdale.

All Sixth District trains will protect against all Third District trains between Fraser River Junction and New Westminster.

All trains will reduce speed to 8 miles per hour over all draw bridges and Interlocking Plants.

Business tracks not shown as stations on time table.

NAME	LOCATION	OPENS	CAPACITY
Washington Shingle Co	1.0 Miles north of Liverpool 2.0 Miles porth of Port Kells 1.5 Miles north of Cloverdale 2.0 Miles north of Cloverdale 2.2 Miles north of Blaine 0.5 Miles south of Port Kells 1.2 Miles porth of Hatelmere	North South South South South North North	15 4 25 2 8 7

2 WEST BOUND.		SEVE	NTI	I DIS	STRICT—ABBOTTSFORD	то	KIL	GARD.		EAST BOUND.
SECOND CLASS.		Capas Side T	city of					plus Cr. L.		SECOND CLASS.
	395	Fracks	4	e e e	Time Table No. 86. In Effect January 10, 1915,	Call.	from	SIGNS.	394	
	Mixed	N N	t to	deard		grap	ottafe	S. Hul- , pag 15.	Mixed	
	Tues, Fri	1 2	00	^Q X	STATIONS.	1 tal	APP		Tu-s, Fri	
	6.25 Aa		10	0	KILGARD		5.0		6.20ks	
	. 6 55Am	30	31	5.0	ABBOTTSFORD	FS	.0	RDW	5 50Au	
	Arrive Tues., Fri.								Tura, Fri	
	395								394	
	10.				Time Over District Average Speed Per Hour				10	

East bound trains have right over west bound trains of same class.

Seventh District trains will protect themselves against Fifth District trains between Abbottsford and Junction, one half mile east of Abbottsford.

INITIAL STATIONS.
Abbottsford....394.
Kilgard.....395.

TERMINAL STATIONS. Kilgard......394. Abbottsford....395.

W	EST BOUND			C	HER	RY VALLEY BRA	NCH	ı.					EAST B	DUND.
	SECOND CLA	55.	Side	City of Tracks		Time Table No. 86.							SECON	CLASS.
	391	393	Track	4	a or	In Effect January 10, 1915.	fress	Call.		SIG	-		390	392
	Mized	Mixed	4	F .	Distance		-	5	Sec R	ulc 3,	press.	15	Mixed	Mixed
	Leave Daily Ex Sunday	Leave Dail,	Ž	9	NO	STATIONS.	Talt	1					Arrive Daily Et Sunday	Arrive Dad Ex Sunday
	6 20hs	11 00km			0.0	MONROE	17.6	Ro	D	N	w	P	10.00km	. 4.00h
	6.35	11.15	47	27	3 6	HIGHROCK	11.0						. 9.40	. 3 30
	. 6 50	11.45	35		9.1	DÜVÄLL	8.5		D			p	. 9.25	. 8.10
	, 7 15fm	12 30Pm	31	26	17.6	TOLT	0.0		D	т	w	P	9.00As	9.40h
	Arrive Delly Et. Sunday	Arrive Daily Ez. Sunday											Leave Daily Ex. Sunday	Leave Dail
	391	393								_			390	392
	10 4	11.7				Time over District Average Speed per Hour							1.00	1.20

East bound trains have right of track over west bound trains of the same class.

INITIAL STATIONS. Tolt 390-392. Monro: 391-393.

TERMINAL STATIONS. Monroe 390-392. Tolt 391-393.

NAME	LOCATION	OPENS	LENGTH	CAPACITY
O'Neill Gowen Shingle Co. Spur	4.6 Miles west of Monroe 5.2 Miles west of Monroe 6.0 Miles west of Monroe 6.4 Miles west of Monroe 7.3 Miles west of Monroe 11.6 Miles west of Monroe	West East East West West West	268 ft. 418 ft. 350 ft. 320 ft. 474 ft. 658 ft.	5 4 5 9

STATIONS	Ruling Grade	Cli	un M	2-1950	-1990	,	C	1355 I	.1-190	00-192	1	а	ass L:	2-1806 7"3026	0-1844 0-3069	,		F5- F6- F7- F8- F9-	1095-10 1100-11 1110-11 1130-11 1140-11 1300-13	109 129 139 199 324	a	ara G2 " G3	2-700-711 3-720-76	9	c	ass F1 D5	-500-56 -450-47	5 6	cı	lnss D2	I-300-3	59		Hasa	D4-40	00-426		CI	3 8B6	-232-2	35
		1	2	3		4	1	2		3 1	4	1	2	1	3	4	1	2	3	4	1	2	3	4	1	2	3	4	1	2	3	4	1	1 3	1	3	4	1	2	3	
ld Bar to Skykomish	1.0	1700			. !		1600					1400					1200			14.	1000			5.0	775				575				715					385		-	-
ykomish to Cascade Tunnel	2.2	850	1 -	1			800) .				700					600				480				360				275				340	1				153		1	
seads Tunnel to Leavenworth	Down	2500					2500					2500		1			1500				1250				900											!					1
evenworth to Cascade Tunnel.	2.2	850		30			800			e e e e e		700		1			600				480		200		360				275				340					185		1	1
ttle to Delta	0.5				0			1				3300					2100				750			1	1350				1050				l	1.						1	į
ta to Seattle	0 4		1 00	1			20.30					3600					2500		1000		2100		100	100	1460				1120					1							
seade Tunnel to Gold Bur	Down	2500		100	. !		2500					2500					1500				1250			****	90)									1							1
lingham to Delta	0.5			100	n		14.0										2300				1650				1300				1000												
ta to Beilingium	0.4		1		2.5			١.,						Ť.			2500				1500				1460				1120											1	
ta to Gold Bar	0.4		100	1 10	4		350	0				3500					2500				1800															1000		0.000			
ld Bar to Delta	0.3						100	0	410	200	***	3500				2024	3000				2200											1		1.							
lingham to Vancouver	1.1			10				10					1	ı, İ.,			1300				1000				775				575			1		1							-
nrouver to Bellingham	1 1			1		1931	***										1300				1000				775				575												

WEATHER RATING

1—When temperature is 25 degrees above zero or over

2—Very frosty or wet. 5 to 25 above zero.

3—Five degrees above to 10 below zero.

4—Ten below zero and colder.

Chief Train Dispatcher may increase or decrease above rating as it may be found necessary.

Weight of Empty Cars and Dead Engines and Tenders will be estimated as follows, when not marked:

					-		•		•••	••	٠.	•••	•	•	•••		٠.		•
Box Cars, 28 to 30	foot.																	. 1	1
Box Care, 33 foot	4- 11								٠.					÷				. 1	2
Box Cars, 34 foot																		. 1	3
Box Care, 36 foot																		. 1	5
Box Cars, 40 foot																		. 1	7
Refrigerator Cars																			
Furniture Cars, 30) to 40	fo	ot.															1	7
Furniture Cars, 40	1 to 50	fo	ot.															. 1	ġ
Cabooses, 8 wheel																			
Cabooses, 4 wheel																		i	ò
Flat Cars, 28 to 3	0 foot																ā		ä
Mat Cars, 33 and	34 foo	t .							ľ		e.			г		-	î	1	ĭ
Flat Cars, 40 foot																			
Coal Cars								93	Ö			Ť	•	·		i.	•	· i	5
Gondola Cars									-							e	^	i	3
Ore Cars, Wood .																			
Ore Cars, Steel																			
Oil Tanks														•			•	٠,	ž
Ballast Cars			•						*				٠,				*	. :	3
Bleam Wreckers .																			
Engine Tank (Em																			
Mail Cars	bral.					٠.		٠.	• •		• •		• •		• •	9		. 0	Ü
Baggage Cars									9:		* *		• •		•	1	*	. 4	0
Coaches, 8 wheel.		-				٠.		• •					٠.		, ,			. 3	Ü
maches, 8 wheel.	*****		+ =					٠.		-					- 4		٠	. 3	U
Coaches, 12 wheel						•		٠,		0.6								. 3	9
Dining Cars and	Louris	C	alt	٠,	:							٠						. 4	0
Sleeping Cars, Pa.	rior C	PU.	aл	ıd	u	Ds	ct	V.	st.	ю		С	A.	3				. 4	O.

Weight of Dead Engines.

	below 200 series 80 Tons
Engines numbered	in 200 series
Engines numbered	In 300 series 86 Tons
	in 400 series
	in 500 series
	in 600 series
	in 700 series
	in 800 series
Engines numbered	in 900 series (except 992 to 997) 115 Tons
Eugines administred	892 to 997 95 Tons
Engines numbered	1000 to 1007
Engines numbered	1050 to 1069
Engines numbered	1079 to 1095
	in 1100 and 1200 series 160 Tons
	in 1300 series
	1400 to 1405
Engines numbered	1406 to 1425
Engines numbered	in 1500 and 1600 series 179 Tons
Engines numbered	in 1700 series
Engines numbered	in 1800 series
Engines numbered	in 1900 series
	in 3000 series. 217 Ton-

The following will govern when handling empty cars: With 10 or less empty cars in a train no allowance will be made for wheel friction; with 10 to 20 empty cars in a train, add to actual weight 5 tons for each empty car for wheel friction; with more than 20 empty cars in a train add 6 tons per car for wheel friction


Speed Limits for Trains.

Between	Passenger	Freight
Leavenworth and Skykomish.	35 miles per hour.	20 miles per hour.
Through Cascade Tunnel	. 20 miles per hour.	15 miles per hour.
Through Martin Card Tunnel No. 15 and Birthes Each End	Smil - per hour	Smil per lent
Skykomish and Gold Bar	. 40 tailes per hour.	20 miles per hour.
Gold Bar and Parific Avenue	.50 miles per hour.	25 miles per hour.
Cherry Valley Line	25 miles per hour.	15 miles per boat.
E-erett Jet, and Seattle	. 50 miles per hour.	25 miles per bour.
Delta Wy: and Samish .	. 50 miles per hour.	25 miles per hour.
Samish and Bellingham	. 40 miles per hour.	20 miles per lour.
B-llingham and Still Greek	. 45 miles per hour.	25 miles per bour.
Still Crock and Vancouver	. 20 miles per hour.	15 mil a per bour.
Skagit Branch	25 miles per hour.	15 miles per lour.
Fraser River Jet. and Cloverdale	. 25 miles per hour.	15 miles per hour.
Guichon to Cloverdale	. 25 miles per hour.	15 railes per hour.
Cloverdale and Sumas	. 30 miles per hour.	20 miles let hour,
Cloverdale and Hazelmere.	. 20 miles per hour.	15 miles per hour.
Kilgard Branch	20 miles per hour.	15 miles per been

L-1, L-2 and M-2 engines will not exceed speed of 25 miles per hour. F-7, 8 and 9 engines will not exceed speed of 30 miles per hour.

Speed Table.

50 miles per hour is equivalent to one mile in 1 minute and 12 seconds
15 miles per hour is equivalent to one mile in 1 minute and 22 seconds
15 miles per hour is equivalent to one mile in 1 minute and 30 seconds
35 miles per hour is equivalent to one mile in 1 minute and 43 seconds
35 miles per hour is equivalent to one mile in 1 minute and 43 seconds
30 miles per hour is equivalent to one mile in 2 minutes and 0 seconds.
25 miles per hour is equivalent to one mile in 2 minutes and 0 seconds.
15 miles per hour is equivalent to one mile in 3 minutes and 0 seconds.



Home Signal.

Upper Arm RED light at night. Lower Arm RED light at night. STOP. Proceed only when Signal Color. Indication.


clears. STOP Signal. Neme

Name




Distant Signal.

RED light at night. STOP then proceed Color. Indication. ed with caution to



ELECTRIC TRAIN STAFF BLOCK SIGNAL DIAGRAMS.



Home Signal.

Indication

Name.

Opper Arm, YELLOW light at night. Color. Lower Arm, RED light at night.


Proceed on main line with caution

be prepared to stop at the Block Station. CAUTION Signal.



Distant Signal.

YELLOW light at Night.
Proceed with CAUTION prepared
to stop at Home Signal.
CAUTION Signal. Indication. Name.




Home Signal.

Upper Arm GREEN light at night. Main line route clear staff in crane PROCEED. CLEAR Signal.

No. 8

Distant Signal. GREEN light at night Indication. PROCEED. Staff in Crane. CLEAR Signal.




Home Signal.

Upper Arm, RED light at night. Lower Arm, YELLOW light at night. Take Passing track CAUTION Signal.

No. 9

Posch for permissing staff disc.



POUCH FOR ABSOLUTE STAFF.

GENERAL INSTRUCTIONS

OPERATING TRAIN STAFF INSTRUMENTS.

TO REMOVE STAFF FROM MACHINE. Instructions to Operator removing staff.

Color.

Name.

Instructions to Operator removing staff.

Press bell key "A" once ①. Answer will be two ② taps.

Press bell key "A" three ② times. Then watch current indicating needle "F" until it deflects to the right. Then parties will go and then release it, permitting it automatically to return to its former position.

A white diace will appear in place of the red one at "H". This indicates that staff is ready to be removed.

Move end staff "E" up to vertical slot into engagement with guard "N". This guard having been turned so that the staff will slip into the slot in the edge of the guard "N" using staff as a handle and withdraw the staff through the opening at "M". This operation moves staff, indicating needle "G" from "Staff out. "Staff out."

Immediately upon withdrawal of staff, press bell key "A" once. This is absolutely necessary.

Instructions to Operator aiding in removal of a staff.

Upon receipt of one ring acknowledge same by two pushes on bell key "A."
Upon receipt of three rings, press bell key and hold it so until staff indicating
needle "F" moves from left to right Twice then release key "A" as operation is complete.

TO REPLACE STAFF IN THE MACHINE. Instructions to Operator replacing staff.

Turn outer guard "N" to place and insert staff in the opening "M."
Using staff as handle revolve guard "N" to the right and allow staff to roll down spiral into place.

3rd. Press bell key "A" according to signal 1-2 of the bell code. Instructions to Operator at opposite end of Block.

The signal 1-2 of the bell code must in every case be answered in order to place the machines in proper condition for the withdrawal of the next staff.

TO REMOVE THE PERMISSIVE STAFF FROM MACHINE.

Insert solid staff in the opening "D" of the permissive attachment and move to the extreme left of the slot "O."

Turn the latch "K" and allow door "C" to drop and the permissive staff to

TO REPLACE THE PERMISSIVE STAFF IN THE MACHINE.

Be sure all discs are on the permissive staff in their proper numerical order. Place staff in attachment, close door "C" and latch with "K." Move solid staff to the right thru slot "O" and remove at opening "D."

INSTRUCTIONS FOR OPERATING SEMAPHORE SIGNALS THROUGH CIRCUIT CONTROLLER ATTACHMENT.

CIRCUIT CONTROLLER ATTACHMENT.

To operate Upper Arm of Senaphore 0. to 45° (See Fig. No. 2), turn handle

"T" to the right clockwise to stop "X."

To operate Upper Arm of Senaphore 45° to 90° (See Fig. No. 3), withdraw absolute staff non-staff supposing "R" and move to extreme left of slot "5" then unrandle "T" to right to stop "Y," remove absolute staff from opening "R" and place staff in Pouch "D", Fig. 9. Then place Fouch in 43f crane which action automatically "Clears" Home and Distant Signals to 93° Position. (See Fig. Nos. 3 and S).

To operate Lower Arm of Semaphore 0° to 45° (See Fig. No. 4), turn handle "U" to the right as far as it will go.

Bell Code of Signals

To attract attention

All Right. Yes. 2 ---

Block wanted, Unlock my In-strument, Ans. by Unlocking or by 5 or 3-1.

Train has entered Block 4----

S----Block is not clear.

Has a train entered this Block? Answer by 2 or 2-1.

Clear. Train has cleared Block. 1-2---

2-1 ---

Previous Signal given in error.

Answer by 2. 2-2-2 ---


2-4-----Hastrain Cleared Block? Answer by 5 or 3-1.

Have unlocked. Block is clear. It must not be used unless Block is known to be clear.

3-3 --- Train in Block.

5-5-5 ---- Obstruction in Block. Stop all trains approaching this Station. Answer by repeating.

8 ----- Testing. Answer by repeating.





ELECTRIC TRAIN STAFF BLOCK SIGNAL RULES AND INSTRUCTIONS.

Electric Train Staff Block Signal System in operation between Leavenworth and Skykomish, Everett Jet., and Pacific Ave., and between Delta Wve and Marysville

The use of the divided staff through Cascade Tunnel and all rules and instructions pertaining thereto will continue in effect.

All rules relating to the protection of trains are in force and are only modified by the General Instructions herein

lock?

llock.

TOT

Block

Block.

ating.

- All trains and engines in both directions will be governed exclusively in their movements by the
 - Home and Distant semaphores are located at each block station. Home signals are located at the massing track switches. Distant Signals are located about 4000 feet from home signals. The signal indications are illustrated by figures Nos. 1, 2, 3, 4, 6, 7, 8 and the meaning of the positions of the signal arms and lights is explained under the diagrams. In all cases the block signals are located upon the right of and adjoining the track upon which trains are governed by them. The semaphore arms that govern are displayed to the right of the signal mast as seen from an approaching train.
- The possession of the staff by the Engineer gives his train the absolute right of track to the next
- ENGINEERS MUST KNOW THAT THE STAFF IS IN THE POUCH BEFORE PROCEEDING
- The staff will be handled by the Engineer of the leading engine of the train; and the staff must be in the actual possession of the Engineer before he moves his train into a block, and such engine must not be uncoupled from the train except at a block station. The Conductor will receive a "proceed" signal from Block Operator to indicate that staff has been delivered to Engineer. (See Rule 29).
- In the case of an engine pushing a train, it must be considered as part of that train through to the next block station, and may be uncoupled only at a block station. Such engine, if then uncoupled, must be treated as a separate train.
- When a staff has been secured by the Engineer, he will announce the fact by sounding one short, one long and one short blast of the whistle, thus (o-o)
- An absolute staff permits but one train at a time to use a block. See D figure No. 9.
- A permission staff disc, permits two or more trains in the same direction at one time to use a block on ascending grade only. Each train must be in possession of a permissive staff disc before proceeding Bee C. Fig. No. 9.
- 6-B. Permissive staff complete permits but one train at a time to use a block. See B, Fig. No. 9 and Rule
- The delivery of the staff to the Enginemen will be either by staff crane, hand of Block Operator, or the Conductor or head Brakeman of his own train and the Engineer must not accept delivery of a staff from any other person. Block Operators will not deliver staff to any other than one of these employes.

Staff will be delivered by Engineer on arrival at 15-A. In the event of staff apparatus and other means of Block Station by dropping same at a designated spot, or, in case of taking siding, and it cannot be personally delivered by Engineer, it will immediately be sent to Block Operator by head Brakeman or Conductor

UNDER NO CIRCUMSTANCES WILL A STAFF BE TRANSFERRED FROM ONE TRAIN TO ANOTHER. IT IS THE DUTY OF THE BLOCK OPERATOR TO SEE THAT ALL OF THE TRAIN CLEARS THE BLOCK BEFORE INSERTING STAFF INTO INSTRUMENT.


- In case a train parts, or it is necessary to "double." the staff must be retained by the Engineer until all the train is clear of the block. A train is clear of a block when it has passed the home signal. A train proceeding on main track enters a block at the block office. It may occupy the main track inside of home signals in either direction to do station work or to allow another train to enter the sidetrack, but must not proceed until in possession of a staff, as per Rule
- 9 A. A train making switching movements may use the main track to, but not beyond the distant signal. when protected as per Rule 99. Superior class trains must not be delayed.
- Enginemen and Trainmen will carefully note the position of all signals and be governed accordingly in the movement and protection of their trains. See Figs. Nos. 1, 2, 3, 4, 6, 7, 8.
- Conductors and Engineers, before leaving initial points, must secure clearance card. Form 219.
- Block Operators, unless otherwise instructed by Train Dispatcher, will staff the train of superior time table rights and side track the inferior train when 20. a meeting point developes at their station.
- When it is desired to reverse the right of track. trains will be moved by Train Dispatcher's orders on Form 19, issued to Block Operators giving instructions to staff the train that is to receive preferred attention, and side track the superior train.
- Work trains, after receiving orders authorizing the existence of the train, will occupy the block after receiving the absolute staff until same is surrendered at a block station at either end of the block. They will be given a time by the Train Dispatcher when delivery shall be made, and unless otherwise instructed, they shall clear the block and deliver the staff to the Block Operator so that regular and extra trains will not be delayed. Train Dispatcher may authorize the delivery of a permissive disc in the prescribed direction to enable work train to work under protection of flag until following train approaches
- In case of failure of staff apparatus, all concerned must be notified and trains will be moved by train orders until it has been repaired. In such event, the train order takes the place of the staff, though only one block on each train order and this order must be given jointly to the Conductor and Engineer of the train and the Block Operator at both ends of the

- communication becoming out of order due to the breakage of line wires or other causes, trains will move in accordance with general rules and time table rights, obtaining at each block office, block eard, Form No. 2615 signed by Block Operator.
- When a staff apparatus has been repaired it will not be put into use until authorized by Train Dispatcher
- 15-C. Before issuing train orders, superseding staff system, the Train Dispatcher must know that block is clear and the Block Operator and Train Dispatcher must know that the full number of staffs are in the two instruments of this block.
- In case a staff should be lost, the staff instruments 23. in this block are inoperative and trains must be moved only by the authority of Train Dispatcher. who will then issue train orders. The staff can only be replaced by Signal Repairman who has charge of the staffs not in use. No extra staffs will be allowed in the possession of any other employe.
- Should a train pass a block station without markers, the Block Operator must notify the Train Dispatcher and the next block station in each direction and must not report that train clear of the block until be has ascertained that the train is complete.
- A record of all trains must be kept at each block station on Form No. 290.
- in case of unexpected delay to a train to which a staff has been delivered, same can be recalled by Block Operator and return of staff to the instrument will cancel the authority given to such train to proceed. The train then has no right to main track until given another staff.
- Block Operators must not deliver a staff received from one train to another train. It must be placed in the instrument and another withdrawn in accordance with the rules.
- BLOCK OPERATORS WILL HANDLE THE STAFF MACHINES IN ACCORDANCE WITH THE RULES AND GENERAL INSTRUCTIONS FOR OPERATING STAFF INSTRUMENTS.
- When two or more trains bound in opposite directions are at a block station, Block Operator must exercise great care in delivery of staffs and must know that the staff is delivered to the train for which it was withdrawn.
- Absolute staffs (See D. Fig. No. 9) must be used for all trains on decending grades, or eastbound from Cascade Tunnel to Leavenworth, and westbound from Tye to Skykomish.
- Permissive staff discs (See C, Fig. No. 9) may be used on ascending grades, or westbound from Leavenworth to Cascade Tunnel, and eastbound from Skykomish to Tye, for all trains except as per rule
- Permissive staff discs must not be given to Engineers with light engines or light tonnage trains to follow a passenger train.
- Trains moving under authority of a permissive 36. staff disc must protect against following trains as per Rule No. 99.

- When two or more trains use permissive staff discs the last train will be given the permissive staff (See B. Fig. No. 9) with all the remaining discs and this confers the same rights as a single permissive staff
- 22-E. The Block Operator receiving the permissive staff must at once assemble on it in numerical order all the permissive discs received from preceding trains and place the complete permissive staff in the permissive attachment
- The first train in the opposite direction (descending the grade) must be given the complete permissive staff, which confers the same rights as an absolute
- When no train movement is imminent, home signals must be kept in stop position.
- Block Operators must not make nor permit any unauthorized alterations or additions to the apparatus. If alterations or additions are made, the work will be done under the direction of the Signal Supervisor.
- If any electrical or mechanical appliance fails to work properly, the Signal Repairman and Train Dispatcher must be notified and only duly authorized persons permitted to make repairs.
- Block Operators must have the proper appliances for hand signaling (a yellow flag by day and a yellow light by night) ready for immediate use. Hand signals must not be used when the proper indications can be displayed by the fixed signals. When hand signals are necessary, they must be given from such a point and in such a way that there can be no misunderstanding on the part of Enginemen or Trainmen as to the signals or as to the train for which they are given.
- Block Operators are responsible for the care of the block station, lamps and supplies and of the signal apparatus unless provided for otherwise.
- Lights in block stations must be so placed that they cannot be seen from approaching trains.
- Block Operators will remain in view until the rear of a train has passed and will give a "proceed" signal to the Conductor on rear of train to indicate that a staff has been delivered to Engineer.
- The Engineer of a train which has parted must sound the whistle signal for "train parted" on approaching a block station.
- An Engineer receiving a "train parted" signal must answer by two short blasts of the whistle.
- When a parted train has been recoupled the Block Operator must be notified
- If the track is obstructed between block stations notice must be given to the nearest Block Operator.
- If a train is held by a block signal to exceed two minutes, the Conductor must ascertain the cause.
- 34-A. The Conductor must report to the Superintendent any unusual detention at block stations.
- Special attention of all concerned is directed to meaning of caution signal as shown by Fig. No. 2.
- Staff instruments must be kept locked. Keys will be furnished to the signal repairman but to no other

AUTOMATIC BLOCK SIGNALS.

- 501. In all cases except as noted by special rules, the BLOCK Signals are located upon the Right of and adjoining the track upon which trains are governed by them. The Semaphore arms that govern are displayed to the right of the Signal mast as seen from an approaching train. The movement of trains will be regulated by the block Signal indications as follows:
 - A. An arm in the horizontal position (See figure No. 1) indicates that the block is not clear and is a Signal to "STOP".
 - B. An arm in an inclined position (45 degrees above the horizontal) (See figure No. 2) indicates "PROCEED" with caution prepared to stop at the next signal.
 - C. An arm in the vertical position (90 degrees above the horizontal) (See figure No. 3) indicates that the block is "CLEAR" and is a Signal to "PROCEED."
 - D. At night the position of the Signals will, in addition, he shown by the standard colored lights.
 RED indicates "STOP".
 YELLOW indicates "CAUTION;" proceed with caution prepared to STOP at next Signal.
 GREEN indicates "PROCEED."
- 502. Block Signals control the use of the blocks, but unless otherwise provided, do not supersede the superiority of trains; nor dispense with the use or the observance of other Signals whenever and whereever they may be required.
- 503. Block Signals for a track apply only to trains running with the current of traffic on that track.
 - A. Automatic Signals are designated by the number plate located on the mast below the arm. Intermediate automatic block signals located between passing tracks are equipped with one arm and one light. Home automatic block signals located at each passing track are in addition equipped with a Disc enclosing a red light six feet below the Semaphore arm. The Disc and red light are provided as a distinguishing marker for the home signals only. Trains passing Home Signals, automatically set to the "Stop Position" all Signals governing train movements in the opposite direction from the next passing track. See figures 4, 5 and 6.



B. Trains holding main track at meeting points must stand clear


- 504. When a train is stopped by a block signal it may proceed when the signal is cleared. If not immediately cleared it may proceed —(See A, B and C);
 - A. On single track, if the block signal is a Home Automatic Signal, at a speed not to exceed 6 miles per hour after obtaining authority from the Train Dispatcher, or preceded by a flagman to the next signal displaying a "Caution" or "Clear" indication expecting to find track impassable.
 - B. On single track, if the block signal is an intermediate automatic signal, at once, at a speed not to exceed 6 miles per hour, except when proceeding under Rule 504-A, expecting to find track impassable.
 Or—
 - C. On double track, at once, under control, expecting to find track impassable.
 - D. A train stopped by a Block Signal must stand facing the signal so that its indication may be observed from the Engine. The forward wheels must not pass the signal.
- 505. Omitted.
- 506. When a train is stopped by a block signal from any cause other than a train in the block, Engineman will report to Superintendent, preferably on Form 2600 and operator will transmit in accordance with instructions thereon.
- 507. Lights must be used upon all block signals from sunset to sunrise, and whenever the signal indications cannot be clearly seen without them. At such times if lights are not burning, or if a white light is shown where a colored light should be, trains must ascertain and be governed by the day signal indication before passing signal.

508. In making train movements through crosses a for other switch to or from a main track, one of the switch a met be lead up until train movement is completed to insure sixed posts from.

The opening of any switch will set and hold train of that blor at stop until the switch is closed. The opening of an eight either end of a double track crossover will hold a use on both main tracks at stop.


If either end of a siding cross-over on stagl, track is opened, will set and hold the signals that control the sided on main tract to which it leads in both directions at stop. North results in cross-over must therefore be opened, until the size email of the track is to be made, and must be closed into distert. Her the solve on a has been made and the switches locked.

- 509. Switch Indicators taniniature schaphor, sp where used standard properties and properties. Trainment of other using switch equipped with switch indicators must first push button on botto of switch indicator case and if no team is approaching switch indicator will clear when switch may be used. The switch should it thrown at once after switch indicator clears.
- 510. When necessary to clean ash pan or einders from the sanok are inside of block signal limits care must be taken to avoid duraph live coals or hot einders on the woods a trunking used to protect it signal track wiring.
- 511. Lights will not be provided on any main line so itch located with 300 feet of an automatic signal governing the block in which it switch is located. Lights will not be provided on trailing polyswitches on double track.
- 512. Cars on side track or other tracks connecting with main tract must be kept clear of bonded rails and insulated joints at oth resisting als will be held in "STOP" position. All tracks connecting with main track are bonded to clearance point only.
- 513. Interlocking Signals located in districts equipped with Automat Signals, become, unless otherwise stated under "Special Rules," part of the automatic block signal system. All such done Interlocking Signals are equipped with not less than two arrival and maintractions governing operation and maintractions governing operation and maintractions governing operation.



INTERMEDIATE
AUTOMATIC BLOCK;SIGNAL.

Color. RED light at night Indication. STOP. Name. STOP Signal.




INTERMEDIATE
AUTOMATIC BLOCK SIGNAL.

Color. YELLOW light at night.


Indication. PROCEED with CAUTION, prepared to stop at next signal.

Name. CAUTION Signal.




INTERMEDIATE
AUTOMATIC BLOCK SIGNAL.

Color, GREEN light at night Indication. PROCEED. Name. CLEAR Signal.



HOME AUTOMATIC BLOCK SIGNAL.

Color. Arm, RED light at night Disc, RED light at night Indication. STOP. Name. STOP Signal.



HOME AUTOMATIC BLOCK SIGNAL.

Color. Arm, YELLOW light at night Disc, RED light at night. Indication. PROCEED with CAUTION prepared to stop at next signal Name. CAUTION Signal.



HOME AUTOMATIC BLOCK SIGNAL.

Color. Arm, GREEN light at might Disc, RED light at night. Indication. PROCEED. Name. CLEAR Signal 901.

002.

504

065.

500


la N

ENGINEMEN AND TRAINMEN.

- 001. Trains or engine may be run to but not beyond a signal indicating 'Stop," except as provided in Rule 663.
- If a Clear of Caution signal, after being accepted, is changed to a "Stop" signal before it is it wheel, the stop must be made at once. Such occurrence must be reported to the Superintendent.
- 963. Enginemen and Trainmen must not proceed on hand signals as against interlocking signals until they are fully informed of the ituation and know that they are protected, and then only when the prescribed hand signal is given as per Rules 620 and 620-A.
- 504. The Engineman of a train which has parted must sound the whistle signal for "train-parted" on approaching an interlocking
- 665. An Engine an receiving a "train parted" signal from a Signalman must answer by the whistle signal for "train-parted."

INTERLOCKING SIGNALS.

- 666. When a parted train has been re-coupled the Signalman must be notified.
- 667. Sand must not be used over movable parts, or ashes dumped within the limits of an interlocking plant.
- 668. Conductors must report to Superintendent any unusual detention at interlocking plants.
- Trains or engines stopped by the Signalman in making a movement through an interlocking plant, must not 190x in either direction until they have received the proper signal from hon.
- 620. If a signal fails to work properly its operation must be discontinued and until repaired the signal secured so as to display the normal indication. Under such circumstances Signalmen must be governing. ed as per Rule 623 and in addition will require all trains to make a full stop before giving hand signal to proceed. Signalmen giving proceed hand signals must use a yellow flag by day and a yellow light by night.



Upper Arm, GREEN light at

night. Lower Arm, RED light at

night

CLEAR Signal



night. Lower Arm, YELLOW light it night.

Indication. Diverging route clear, proceed eith CAUTION.

CAUTION Signal.

No.15

. No.10 Upper Arm, RED light at

INTERLOCKING HOME SIGNAL. Upper Ann, RED light at Color.

mght. Middle Arm, RED light at night. Lower Arm, RED light at

night. Indication. STOP. Proceed only when signal clears or upon pres-cribed band signal from Sig-

nalman. STOP Signal.




DWARF SIGNAL RED light at night.

620A. Signalmen giving hand signals must do so from the center of the track upon which the train movement is to be made. When more than one train is in sight hand signal must be given from a point not to exceed one hundred feet in advance of the locomotive.

623. If there is a derailment, or if a switch is run through, or if any damage occurs to the track or interlocking plant, or if any part of the interlocking apparatus fails to operate properly, the signals must be restored to the normal position, and no train or switch movement permitted until the track and interlocking parts liable to consequent injury or failure have been thoroughly examined and and are known to be in safe condition.

Note. A flag signal given by Signalman at an interlocking home signal in automatic signal districts is only authority to pass such signal and does not modify its indication as an automatic signal See Rules 504 and 513.



INTERLOCKING HOME SIGNAL.

Upper Arm, RED light at night. Middle Arm, RED light at night. Lower Arm, YELLOW light


No.12

Indication. Slow speed, Route clear, Pro-

CAUTION Signal. Name.



DWARF SIGNAL. YELLOW light at night.
PROCEED with CAUTION
CAUTION Signal.



INTERLOCKING HOME SIGNAL

Upper Arm, RED hast at Layer And, BED by a it

Indication STOP, Provid and, when ign diel us or upon pe weile diend ag alle na Sign doein s TOP Sign b Name




INTERLOCKING HOME SIGNAL.

No.8

Upper Arm, YELLOW light

at might.
Lover Arm, RED light at might.
Main line route clear, proceed with CAUTION, prepared to step at next signal.
CAUTION Signal.



No.14

INTERLOCKING DISTANT BIGNAL

INTERLOCKING DISTANT SIGNAL.

INTERLOCKING DISTANT SIGNAL.

Color. GREEN light at night Indication. PROCEED. CLEAR Signal



YELLOW light at night.
PROCEED with CAUTION,
prepared to stop at Home Signal.
CAUTION Signal.

Delta-

E. O. WADHAMS, Dispatcher.

T. H. REED, Dispatcher.

C. E. LAMKIN, Dispatcher.

J. C. DEVERY, Chief Dispatcher.

Seattle. J. F. HUNTER.
Burlington J. H. CROSSBY.

Everett A. J. MOHN.
Bellingham WILBER GIBBS.

Tye--

G. E. WELLIEN, Dispatcher.

C. O. JOHNSON, Dispatcher.

H. L. CAULKINS, Dispatcher.

D. MOORE, Ass't Chief Dispatcher.

J. BRADY, Train Master and Traveling Engineer.

S. CORRIGAN, Train Master.

Vancouver, B. C. PAUL & McDONALD.
Tacoma, Wash. RICHARD VEATH.

 Centralia, Wash
 BEN SALICK.

 Portland, Ore.
 C. CHRISTENSON.

 Monroe, Wash
 CARLQUIST BROS.

T. B. DEGNAN, Superintendent of Terminals.

