



COMPANY SURGEONS

*Dr. Roscoe C. Webb, Chief Surgeon.....	Minneapolis, Minn.
*Dr. Ernest R. Anderson, Asst. Chf. Surg.....	Minneapolis, Minn.
*Dr. F. J. Savage	St. Paul, Minn.
Dr. G. D. Brand	St. Paul, Minn.
*Dr. Victor E. Ekblad	Superior, Wis.
*Dr. Milton Finn	Superior, Wis.
Dr. Fred Johnson	Superior, Wis.
Dr. E. G. Stack	Superior, Wis.
Dr. Raymond J. Spurzem	Anoka, Minn.
Dr. Leroy J. Larson	Bagley, Minn.
*Dr. Einar W. Johnson	Bemidji, Minn.
Dr. T. P. Groschupf	Bemidji, Minn.
Dr. Wm. T. Nygren	Braham, Minn.
Dr. W. W. Will	Bertha, Minn.
Dr. L. H. Hedenstrom	Cambridge, Minn.
Dr. John D. VanValkenburg	Floodwood, Minn.
Dr. R. F. Raiter	Cloquet, Minn.
Dr. Gordon C. MacRae	Duluth, Minn.
*Dr. C. H. Coombs	Cass Lake, Minn.
Dr. A. L. Koskela	Deer River, Minn.
Dr. E. P. Zorn	Erskine, Minn.
Dr. Chas. S. Donaldson	Foley, Minn.
*Dr. G. M. Erskine	Grand Rapids, Minn.
Dr. J. L. McLeod	Grand Rapids, Minn.
Dr. C. E. Sisler	Grand Rapids, Minn.
*Dr. B. S. Adams	Hibbing, Minn.
Dr. Clarence Jacobson	Hibbing, Minn.
Dr. E. L. Stephan	Hinckley, Minn.
Dr. R. L. Christie	Long Prairie, Minn.
Dr. C. J. Henry	Milaca, Minn.
Dr. J. E. Henry	Milaca, Minn.
Dr. C. S. Bossert	Mora, Minn.
Dr. H. P. Dredge	Sandstone, Minn.
*Dr. H. W. Goehrs	St. Cloud, Minn.
Dr. G. H. Goehrs	St. Cloud, Minn.
Dr. J. F. DuBois	Sauk Center, Minn.
Dr. C. B. Lenont	Virginia, Minn.
Dr. H. B. Ewens	Virginia, Minn.
Dr. Luther F. Davis	Wadena, Minn.
Dr. O. F. Ringle	Walker, Minn.

*Designates also Examining Surgeon.

OPHTHALMIC SURGEONS

(Eye Doctors)

Dr. Frank E. Burch	St. Paul, Minn.
Dr. Edward P. Burch	St. Paul, Minn.
Dr. C. N. Spratt	Minneapolis, Minn.
Dr. John E. Power	Duluth, Minn.
Dr. T. J. Doyle	Superior, Wis.
Dr. Roger T. Thompson	Superior, Wis.
Dr. W. T. Wenner	St. Cloud, Minn.

W. J. HAYNES,
Chief Dispatcher.

W. C. JONES,
Chief Dispatcher.

W. H. RUMMEL,
Trainmaster.

JOHN P. SULLIVAN,
Trainmaster.

R. H. SHOBER,
Assistant Trainmaster.

W. ANDREWS,
Assistant Superintendent.

Scanned from the Dean Ogle Collection

GREAT NORTHERN RAILWAY COMPANY

MESABI DIVISION TIME TABLE 59

EFFECTIVE 12:01 A. M.

CENTRAL TIME

Sunday, March 5, 1950

C. O. HOOKER, Superintendent.

I. G. POOL, General Manager.

J. B. SMITH, General Superintendent Transportation.

2 WESTWARD

FIRST SUBDIVISION

Station Numbers	Car Capacity		SECOND CLASS				FIRST CLASS				Distance from Duluth	Time Table No. 59.		Telegraph Calls	
	Sidings	Other Tracks	413	421	411	407		35	19	23		31	Effective March 5, 1950		STATIONS
			Daily	Daily	Daily	Daily		Daily Ex. Sunday	Daily	Daily		Daily Ex. Sunday			
J 139								L 9.30Pm	L 4.30Pm	L 8.00Am		2.29	DULUTH 2.29	DU	
								A 9.36Pm	A 4.36Pm	A 8.06Am			BRIDGE SWITCH		

TRAINS BETWEEN ELEVATOR STATION AND DULUTH TERMINAL DEPOT WILL BE GOVERNED BY NORTHERN PACIFIC, DULUTH AND SUPERIOR TERMINALS TIME TABLE.

											3.16	ELEVATOR STATION	
								s 9.45	s 4.45	s 8.15	4.13	SUPERIOR	BY
J 136	Yard	5217									5.31	25th ST.	
J 131		36									8.29	CENTRAL AVE.	

FIRST CLASS TRAINS BETWEEN CENTRAL AVE. TOWER AND DULUTH TERMINAL DEPOT WILL BE GOVERNED BY NORTHERN PACIFIC, DULUTH AND SUPERIOR TERMINALS TIME TABLE.

Station Numbers	Sidings	Other Tracks	L 11.30Pm	L 10.50Pm	L 10.30Pm	L 10.15Pm	L 9.55Pm	L 4.53Pm	L 8.23Am	Distance from Duluth	Station	Telegraph Calls
J 130	Yard	247	11.35	10.58	10.37	10.22	9.58	4.56	8.26	8.60	CENTRAL AVE. TOWER	SU
J 125			A 11.45Pm	A 11.10Pm	10.44	10.29	A 10.03Pm	4.59	8.29	13.21	M. ST. P. & S. S. M. R. R. CROS'G.	B
J 121	95	7			10.59	10.44			f 8.36	18.46	SAUNDERS	J
J 113	127	5			11.13	10.58		5.12	s 8.44	24.63	BOYLSTON	BO
J 109	70	5			11.28	11.13		f 8.51		29.94	DEDHAM	
J 103	189	3			11.58	11.33		5.23	s 9.00	36.67	FOXBORO	NS
J 99		4			12.06Am	11.38			s 9.05	40.58	HOLYOKE	
J 96		34			12.13	11.43			s 9.10	43.12	NICKERSON	K
J 91	110	14			12.25	11.53		5.34	s 9.18	48.87	DUQUETTE	UN
J 82	135	24			12.40	12.05Am		5.41	s 9.29	57.25	KERRICK	RD
J 76		382			408-412 1.00 1.30	408-412 12.25 12.55		5.48	s 9.39	63.11	BRUNO	NA
J 67		16			1.55	1.15			s 9.49	71.93	ASKOV	H
	144	16			1.57	1.17		5.58	9.50	72.30	SANDSTONE	HT
J 59	167	6			2.16	1.37		20 6.07	24 s 10.00	80.14	HINCKLEY	BK
GA54	16	4			A 2.17Am	1.38		6.08	10.01	80.54	HINCKLEY TOWER	
GA49	107	32				1.50			s 10.07	85.96	BROOK PARK	HR
GA43	59	35				2.02		6.17	s 10.14	91.37	BROOK PARK JCT.	SA
GA40		19				2.14		6.22	s 10.21	96.66	HENRIETTE	RA
GA38		30				2.21			s 10.26	100.06	GRASSTON	
GA33	104	120				2.27			s 10.30	102.57	BRAHAM	SD
GA27		55				2.37		s 6.31	s 10.37	107.46	STANCHFIELD	CG
GA21	99	49				2.49			s 10.44	113.10	GRANDY	IB
GA15		20				3.01		6.41	s 10.53	119.13	CAMBRIDGE	BE
GA 9	99	13				3.13			f 11.00	125.28	ISANTI	
G 13						3.25			f 11.05	131.23	BETHEL	
						A 3.40Am		A 6.56Pm	A f 11.11Am	136.90	CEDAR	CN

TRAINS BETWEEN COON CREEK JUNCTION AND NORTHTOWN WILL BE GOVERNED BY NORTHERN PACIFIC TIME TABLE.

TRAINS BETWEEN NORTHTOWN AND ST. PAUL WILL BE GOVERNED BY TWIN CITY TERMINALS TIME TABLE.

								A 7.45Pm	A 11.59Am	159.91	ST. PAUL	
			.15	.20	3.47	5.25		.33	2.26	3.11	38	Time Over Subdivision
			18.4	15.3	18.6	25.2		24.0	56.3	43.0	27.5	Average Speed Per Hour

Westward trains are superior to eastward trains of the same class except Nos. 20 and 24 are superior to No. 31 Brook Park Jct. to Sandstone.
SEE ADDITIONAL SPECIAL INSTRUCTIONS PAGES 11 THROUGH 19.

FIRST SUBDIVISION

EASTWARD 3

Time Table No. 59.

Effective March 5, 1950

STATIONS	Distance from St. Paul	FIRST CLASS				SECOND CLASS				SIGNS
		36	24	20	32	414	408	412		
		Daily Ex. Monday	Daily	Daily	Daily Ex. Sunday	Daily	Daily	Daily		
DULUTH	159.91	A 7.15Am	A 11.58Am	A 7.45Pm					RKDNXB	
BRIDGE SWITCH	157.62	L 7.08Am	L 11.52Am	L 7.39Pm						
TRAINS BETWEEN ELEVATOR STATION AND DULUTH TERMINAL DEPOT WILL BE GOVERNED BY NORTHERN PACIFIC, DULUTH AND SUPERIOR TERMINALS TIME TABLE.										
ELEVATOR STATION	156.75									
SUPERIOR	155.78	s 7.00	s 11.43	s 7.30					RKP WBCXO PX	
25th ST.	154.60									
CENTRAL AVE.	151.62									
FIRST CLASS TRAINS BETWEEN CENTRAL AVE. TOWER AND DULUTH TERMINAL DEPOT WILL BE GOVERNED BY NORTHERN PACIFIC, DULUTH AND SUPERIOR TERMINALS TIME TABLE.										
CENTRAL AVE. TOWER	151.31	A 6.48Am	A 11.33Am	A 7.19Pm		A 3.33Am	A 2.50Am	A 5.33Am	RIDNPXJ	
N. P. Ry. Crossing	150.50								I	
M. ST. P. & S. S. M. R. R. CROSS'G	149.58	6.45	11.30	7.16		3.27	2.45	5.27	IDNPXJ	
SAUNDERS	146.70	L 6.41Am	11.27	7.13		L 3.20Am	2.35	5.20	RIDNPJ	
BOYLSTON	141.45		f 11.19				2.24	5.00	P	
DEDHAM	138.28		f 11.10	7.01			2.12	4.40	PW	
FOXBORO	129.97		f 11.03				2.02	4.20	P	
HOLYOKE	123.24		f 10.54	6.51			1.50	4.00	NPW	
NICKERSON	119.88		f 10.49					3.36		
DUQUETTE	116.79		f 10.44				1.40	3.30	DP	
KERRICK	111.04		s 10.37	6.41			1.30	3.05	DP	
BRUNO	102.66		s 10.27	6.34			1.15	2.30	DP	
ASKOV	96.80		s 10.20	s 6.28	A 5.00Pm		407-411 1.00	407-411 2.00Am	BRDNPT WXCIO DP	
SANDSTONE	87.98		s 10.10		s 4.37		12.35	11.20Pm	DP	
HINCKLEY	87.61		10.09	6.15	4.36		12.03Am	10.56	DNPI	
HINCKLEY TOWER	79.77		s 10.00	6.07	s 4.25		11.39	10.41	RDNPI	
N. P. Ry. Crossing	79.37		9.59	6.06	L 4.21Pm		11.38	L 10.40Pm	IPWJ	
BROOK PARK	73.95		s 9.54				11.24		P	
BROOK PARK JCT.	68.54		s 9.47	5.57			11.09		DP	
HENRIETTE	63.25		s 9.41	5.52			10.54		DP	
GRASSTON	59.85		s 9.36				10.43		P	
BRAHAM	57.84		s 9.32				10.37		DP	
STANCHFIELD	52.45		s 9.25	s 5.43			10.23		DNP	
GRANDY	46.81		s 9.15				10.08		DP	
CAMBRIDGE	40.78		s 9.07	5.34			9.52		DPW	
ISANTI	34.63		f 8.58				9.35		P	
BETHEL	28.68		f 8.51	5.24			9.20		P	
CEDAR	23.01		L f 8.46Am	L 5.19Pm			L 9.00Pm		JRDNPI	
COON CREEK JCT.										
TRAINS BETWEEN COON CREEK JUNCTION AND NORTHTOWN WILL BE GOVERNED BY NORTHERN PACIFIC TIME TABLE										
TRAINS BETWEEN NORTHTOWN AND ST. PAUL WILL BE GOVERNED BY TWIN CITY TERMINALS TIME TABLE.										
ST. PAUL			L 8.00Am	L 4.30Pm						
Time Over Subdivision										
Average Speed Per Hour										
		.84	8.12	2.26	.39		.13	5.50	6.53	
		23.4	42.8	56.3	26.8		23.6	21.9	12.2	

Westward trains are superior to eastward trains of the same class except Nos. 20 and 24 are superior to No. 31 Brook Park Jct. to Sandstone.
SEE ADDITIONAL SPECIAL INSTRUCTIONS PAGES 11 THROUGH 19.

WESTWARD

THIRD SUBDIVISION

EASTWARD 5

Station Numbers	Car Capacity		SECOND CLASS		FIRST CLASS		Distance from Duluth	Time Table No. 59.			Telegraph Calls	Distance from Cass Lake	SIGNS	FIRST CLASS		SECOND CLASS				
	Sidings	Other Tracks	413	421		35		Effective March 5, 1950						36		414				
			Daily	Daily		Daily Ex. Sunday		STATIONS						Daily Ex. Monday		Daily				
J125			L 11.45Pm	L 11.10Pm		L 10.03Pm	13.21	BOYLSTON 5.91 DEWEY 3.88 STATE LINE TOWER N. P. Ry. Crossing 8.84 BRIDGE 29 6.07 CARLTON N. P. Ry. Crossing 8.26 SCANLON 2.70 CLOQUET 16.49 BROOKSTON 7.85 PAUPORES 4.82 MIRBAT 5.35 FLOODWOOD 6.09 ISLAND 6.51 WAWINA 3.96 SWAN RIVER 5.47 WARBA 8.41 PHILBIN 3.00 BLACKBERRY 4.58 GUNN 3.05 GRAND RAPIDS 4.90 CONASSET 9.42 DEER RIVER 7.03 BALL CLUB 12.01 BENA 7.54 SCHLEY 2.04 M. ST. P. & S. S. M. R. R. CROSSING 9.51 CASS LAKE			J	149.40	JRDNPI	A 6.41Am		A 3.20Am				
Y251	99	2	12.01Am	11.20		f 10.11	19.18					S	143.49	P	f 6.33					
Y249			12.15	11.35		f 10.17	23.01						139.61	DNPI	6.27					
Y236	85	10	12.35	12.01Am		s 10.37	26.85						133.62	IP						
Y232						f 10.43	28.19						129.69	DNPWI	s 6.15					
Y229		280	1.05	12.15		s 10.51	36.19						126.43	P	f 6.07					
Y213	89	76	1.55	1.20		s 11.18	38.89					KN	123.78	PX	s 6.02					
Y205		3				f 11.30	55.88					BN	107.24	JDNPW CXY	s 5.39					
Y200		12	2.20	1.35		f 11.39	63.23						99.39	P	f 5.28					
Y195		56	2.30	1.45		s 11.52	67.85						94.77	P	f 5.21					
Y189			2.41	2.00		f 12.01Am	78.20		OD	89.42	DP	s 5.14					12.45			
Y182		11	2.57	2.10		f 12.10	79.29			82.33	P	f 5.04					12.30			
Y178		78	3.05	A 2.20Am		s 12.22	85.80			76.82	P	f 4.56					12.15Am			
Y172		7	3.14			s 12.33	89.76		WA	72.82	JDNPW YI	s 4.49					11.59			
	200		3.20			12.40	95.28		FS	67.39	P	s 4.40					11.30			
Y166		6	3.26			f 12.45	98.64				PI	4.35					11.20			
Y161	96	175	3.36			12.52	101.64			60.98	P	f 4.31					11.15			
Y159		271	3.46			s 1.15	106.22		GU	56.40	JPWYI DNP	4.25					11.05			
Y156	123	11	4.08			s 1.27	109.27		GR	53.35	DNXP	s 4.20					10.50			
Y145	42	96	4.39			s 1.53	114.17		CH	48.45	P	s 4.08					10.35			
Y138	70	18	5.00			f 2.07	123.59		RI	39.03	DNPWXC	s 3.56					10.15			
Y125	69	22	5.29			s 2.31	130.62			32.00	P	f 3.45					9.50			
Y118	123	3	5.49			f 2.44	143.53		BA	19.09	DP	s 3.30					9.25			
							151.07			11.55	P	f 3.20					9.00			
							153.11			9.51	I									
Y106	Yard	690	A 6.20Am			A 3.02Am	162.62		CS		RKDNPB WCYXO	L 3.07Am					L 8.30Pm			
			6.35 22.7	8.10 24.1		4.59 30.0						3.34 41.9					6.50 21.8			

Westward trains are superior to eastward trains of the same class.
 SEE ADDITIONAL SPECIAL INSTRUCTIONS PAGES 11 THROUGH 19.

6 WESTWARD

FOURTH SUBDIVISION

Station Numbers	Car Capacity		THIRD CLASS		FIRST CLASS				Distance from Cass Lake	Time Table No. 59.		Telegraph Calls
	Sidings	Other Tracks	559		(108)	(136)	105	35		Effective March 5, 1950		
					Daily Ex. Sun.	Daily Ex. Sun.	Daily Ex. Sun.	Daily Ex. Mon.		STATIONS		
Y106	Yard	690	L 7.30Am		L 10.49Am		L 7.54Am	L 3.07Am ³⁶			CASS LAKE 0.76	CS
Y101		15	7.43		A 10.53Am		f 8.00	f 3.12	0.76	4.18	K LINE JCT. 3.37	
Y 96	69	10	7.56				f 8.07	f 3.18		9.75	FARRIS 5.62	
Y 90	70	188	8.05				A 8.15Am	s 3.30	14.34	15.27	ROSBY 4.59	
Y 84	70	10	9.15					s 3.40		21.51	N. P. RY. CROSSING 0.93	BM
Y 78		26	9.45					s 3.50		27.55	BEMIDJI 8.24	
Y 72	69	27	10.05					s 4.00		33.75	WILTON 8.04	N
Y 65	75	48	11.10					s 4.10		40.45	SOLWAY 8.20	SO
Y 58	101	27	11.45 ⁵⁶⁰					f 4.23		47.77	SHEVLIN 8.70	VN
Y 52	70	23	12.15pm					s 4.32		53.79	BAGLEY 7.32	BY
Y 45	70	115	12.50					s 4.45		60.83	EBRO 8.02	RO
Y 37	70	35	1.15					s 5.00		68.41	LENGBY 7.04	G
Y 31	72	37	1.45					s 5.14		74.14	FOSSTON 7.58	FO
Y 24	71	84	2.05					s 5.28		74.45	McINTOSH 8.73	MO
Y 18		8	2.50					5.38			M. ST. P. & S. M. R. R. CROSSING 0.31	
Y 17			2.54				Lf 7.10pm	f 5.40		81.16	ERSKINE 0.31	RS
Y 12	70	29	3.07				f 7.19	f 5.48		86.74	MENTOR 8.71	MT
Y 6		88	3.27				f 7.30	f 5.57		87.84	DUGDALE 1.10	
A298	Yard	418	A 3.45pm		A 7.40pm		A 6.05Am		102.56	99.36	TILDEN JCT. 4.84	ON
									104.98		N. P. RY. CROSSING 2.37	
											CROOKSTON YARD	CA

TRAINS BETWEEN CROOKSTON YARD AND CROOKSTON WILL BE GOVERNED BY DAKOTA DIVISION TIME TABLE.

Station	Time	Distance	Speed
		A 7.45pm	A 6.10Am
	8.15		106.91
	12.7	.04	1.98
		.30	CROOKSTON
		11.5	Time Over Subdivision
		34.1	Average Speed Per Hour
		43.6	
		2.58	
		35.2	

Westward trains are superior to eastward trains of the same class, except No. 108 is superior to No. 105 and No. 106 is superior to No. 107 between K Line Jct. and Cass Lake.

SEE ADDITIONAL SPECIAL INSTRUCTIONS PAGES 11 THROUGH 19.

FOURTH SUBDIVISION

EASTWARD 7

Time Table No. 59.

Effective March 5, 1950

STATIONS	Distance from CROOKSTON	FIRST CLASS				THIRD CLASS				SIGNS
		36	106	(135) 134	(105) 108	560				
		Daily Ex. Mon.	Daily Ex. Sun.	Daily Ex. Sun.	Daily Ex. Sun.	Daily Ex. Sun.				
CASS LAKE..... 0 76	106.91	A 3.02Am	A 10.25Am		A 7.44Am			A 3.15Pm		BRDNKW CXPYO
K LINE JCT..... 3 37	106.15				L 7.41Am					JXY
FARRIS..... 5 02	102.78	f 2.57	f 10.17					3.05		P
ROSSBY..... 4 59	97.16	f 2.51	f 10.08					2.50		P
N. P. RY. CROSSING..... 0 93	92.57									I
BEMIDJI..... 6 24	91.64	s 2.42	L 10.00Am					2.40		BRDNPWX
WILTON..... 6 04	85.40	s 2.26						2.05		DP
SOLWAY..... 6 20	79.36	s 2.16						1.40		DP
SHEVLIN..... 6 70	73.16	s 2.06						1.05		DP
BAGLEY..... 7 32	66.46	s 1.56						12.15Pm 559		DPW
EBRO..... 6 02	59.14	f 1.43						11.45		DP
LENGBY..... 7 04	53.12	s 1.34						11.15		DP
FOSSTON..... 7 58	46.08	s 1.21						10.45		DPWCX
McINTOSH..... 5 73	38.50	s 1.07						10.05		DP
M. ST. P. & S. S. M. R. R. CROSSING..... 0 31	32.77									IP
ERSKINE..... 6 71	32.46	s 1.257						9.40		DPW
MENTOR..... 5 58	25.78	s 1.246						8.40		DP
DUGDALE..... 1 10	20.17	12.38						8.20		P
TILDEN JCT..... 4 84	19.07	f 12.36		A f 8.38Am				8.15		RDPIJ
N. P. RY. CROSSING..... 6 88	14.23	f 12.30		f 8.28				8.00		P
BENOIT..... 6 88	7.55	f 12.21		f 8.16				7.40		P
BURWELL..... 3 20	4.35									I
N. P. RY. CROSSING..... 2 37	1.98	L 12.14Am		L 8.05Am				L 7.30Am		RNWCYX BPO
CROOKSTON YARD.....										

TRAINS BETWEEN CROOKSTON YARD AND CROOKSTON WILL BE GOVERNED BY DAKOTA DIVISION TIME TABLE.

1 08 CROOKSTON	L 12.09Am	L 8.00Am								BRDNKX
Time Over Subdivision	2.48	.25	.33	.03			7.45			
Average Speed Per Hour	37.5	36.6	31.0	15.9			13.5			

Westward trains are superior to eastward trains of the same class, except No. 108 is superior to No. 105 and No. 106 is superior to No. 107 between K Line Jct. and Cass Lake.

SEE ADDITIONAL SPECIAL INSTRUCTIONS PAGES 11 THROUGH 19.

8 WESTWARD

FIFTH SUBDIVISION

EASTWARD

Station Numbers	Car Capacity		THIRD CLASS		FIRST CLASS		Distance from Sauk Center	Time Table No. 59. Effective March 5, 1950			Telegraph Calls	SIGNS	FIRST CLASS		THIRD CLASS	
	Sidings	Other Tracks	523		105			STATIONS	106				524			
			Daily Ex. Sun.	Daily Ex. Sun.	Daily Ex. Sun.	Daily Ex. Sun.										
117	195	L 2.30Am	0.00 SAUK CENTRE	AU	RDN WCXB	A 4.00Pm		

TRAINS BETWEEN PARK RAPIDS JCT. AND SAUK CENTRE WILL BE GOVERNED BY DAKOTA DIVISION TIME TABLE.

.....	L 2.50Am	L 2.33Am	0.16 PARK RAPIDS JCT.	JP	A 3.55Pm	A 1.10Pm
.....	0.68 N. P. Ry. CROSSING	I
K-10	5	3.15	s 2.51	10.40 LITTLE SAUK	s 3.33	12.40
K-14	15	3.24	s 2.58	18.86 ROUND PRAIRIE	s 3.26	12.25
K-18	89	52	4.15	s 3.10	18.60 LONG PRAIRIE	NE	D	s 3.15	12.05Pm
K-24	46	4.45	s 3.25	26.46 BROWERVILLE	VI	D	s 2.54	11.30
K-32	31	5.05	s 3.36	31.84 CLARISSA	RU	D	s 2.42	11.05
K-36	84	32	5.28	s 3.46	36.53 EAGLE BEND	GD	DW	s 2.31	10.45
K-44	27	5.48	s 4.05	44.04 BERTHA	BR	D	s 2.16	10.05
K-48	27	6.06	s 4.14	48.07 HEWITT	HW	D	s 2.04	9.45
K-56	52	6.41	s 4.34	56.21 WADENA	WD	D	s 1.49	8.45
K-60	28	7.01	t 4.44	60.58 N. P. Ry. CROSSING	I
K-70	23	30	7.44	s 5.08	70.46 LEAF RIVER	t 1.35	8.15
K-79	27	8.25	s 5.27	79.19 SEBEKA	SK	DW	s 1.18	7.44
K-91	80	116	9.20	s 6.08	91.19 MENANGA	MH	D	s 12.58	7.01
K-98	15	9.40	s 6.21	97.76 PARK RAPIDS	J	DX	s 12.35	105 6.08
K-103	29	10.10	s 6.32	103.09 DORSET	DE	s 12.17	5.36
K-109	27	10.55	s 6.45	109.32 NEVIS	N	D	s 12.07Pm	5.21
K-119	32	11.34	s 7.02	118.84 AKELEY	AY	DW	s 11.54	5.01
K-124	15	12.50Pm	t 7.13	124.21 WALKER	K	D	s 11.34	4.15
K-131	12	1.15	s 7.25	130.98 N. P. Ry. CROSSING
.....	A 7.41Am	139.64 LEECH LAKE	t 11.20	3.50
..... WILKINSON	s 11.08	3.34
..... K LINE JCT.	JXY	L 10.53Am

TRAINS BETWEEN K LINE JCT. AND CASS LAKE WILL BE GOVERNED BY FOURTH SUBDIVISION SCHEDULES.

Y-108	Yard	690	A 1.50Pm	A 7.44Am	140.40 CASS LAKE	CS	BRKDN WCXPYO	L 10.49Am	L 3.10Am
.....	11.00 12.88	5.08 27.2	Time Over Subdivision Average Speed Per Hour	5.02 27.7	10.00 14.0

Westward trains are superior to eastward trains of the same class.

SEE ADDITIONAL SPECIAL INSTRUCTIONS PAGES 11 THROUGH 19.

WESTWARD SIXTH SUBDIVISION EASTWARD

Station Numbers	Car Capacity		SECOND CLASS		Distance from Elk River	Time Table No. 59. Effective March 5, 1950	Telegraph Calls	SIGNS	SECOND CLASS	
	Sidings	Other Tracks		305					306	
G-28			L	8.52Am	0.00	ELK RIVER	ER	JRD NW	A	1.37Pm

TRAINS BETWEEN N. P. RY. JCT. AND ELK RIVER WILL BE GOVERNED BY N. P. RY. TIME TABLE.

Station	Capacity	Class	Time	Distance	Station	Capacity	Class	Time	Distance
H-11	23	L	8.54Am	0.74	N. P. Ry. JCT.	WR	I	A	1.25Pm
H-20	29 103	s	9.25	10.23	ZIMMERMAN			s	1.00
H-24	4	s	10.05	19.16	PRINCETON	CT	DX	s	12.30
H-29	9	s	10.20	23.36	LONG'S SIDING			s	12.10Pm
		s	10.38	28.58	PEASE	EA		s	1.55
		A	10.50Am	32.56	MILACA JCT.		JP	L	11.40Am

TRAINS BETWEEN MILACA JCT. AND MILACA WILL BE GOVERNED BY SECOND SUBDIVISION SCHEDULES.

Station	Capacity	Class	Time	Distance	Station	Capacity	Class	Time	Distance
J-28		A	10.55Am	33.19	MILACA	MU	RDPB WX	L	11.35Am
			1.56 16.4						1.45 18.1

Westward trains are superior to eastward trains of the same class.
SEE ADDITIONAL SPECIAL INSTRUCTIONS PAGES 11 THROUGH 19.

**SEVENTH SUBDIVISION 9
WESTWARD EASTWARD**

Station Numbers	Car Capacity		Distance from Allouez	Time Table No. 59. Effective March 5, 1950	Telegraph Calls	SIGNS	
	Sidings	Other Tracks					
YA 26	Yard	9008	2.78	Double Track {ALLOUEZ..... 3.34BRIDGE A-9..... 0.91SAUNDERS.....	Automatic Block Signals	BJ RKPWC OYXIB I	
J 130	Yard	226	4.25				B JPXIDN

Westward trains are superior to eastward trains of the same class.

SEE ADDITIONAL SPECIAL INSTRUCTIONS PAGES 11 THROUGH 19.

WESTWARD EIGHTH SUBDIVISION EASTWARD

Station Numbers	Car Capacity		Distance from Brookston	Time Table No. 59. Effective March 5, 1950	Telegraph Calls	Distance from Kelly Lake	SIGNS
	Sidings	Other Tracks					
Y 213	89	70		BROOKSTON	BN	50.33	JDNPW CXY
YD 4		19	5.21	ARLBERG		45.12	P
YD 11	65	2	11.20	BADEN		39.13	P
YD 21	74	2	21.10	DUMBLANE		29.23	PW
YA 5		17	31.07	CASCO		19.26	P
YA12		16	37.88	ONEGA		12.45	P
			43.84	D. M. & I. R. Ry. CROSSING		6.49	I
YA19		17	44.65	RILEY		5.68	P
YB25 1/2	Yard	1329	50.33	KELLY LAKE	KY		BRKDNP OJWCYX

Westward trains are superior to eastward trains of the same class.
SEE ADDITIONAL SPECIAL INSTRUCTIONS PAGES 11 THROUGH 19.

WESTWARD NINTH SUBDIVISION EASTWARD

Station Numbers	Car Capacity		Distance from Chisholm	Time Table No. 59. Effective March 5, 1950	Telegraph Calls	Distance from Kelly Lake	SIGNS
	Sidings	Other Tracks					
YC 1		55		CHISHOLM	CM	11.28	DPX
			.54	CHISHOLM JCT.		10.74	
			1.76	DUNCAN JCT.		9.52	X
			3.17	D. M. & I. R. Dunwoody Jct.		8.11	
			4.07	DUNWOODY JCT.		7.21	

Westward trains are superior to eastward trains of the same class.
SEE ADDITIONAL SPECIAL INSTRUCTIONS PAGES 11 THROUGH 19.

10 WESTWARD

TENTH SUBDIVISION

EASTWARD

Station Numbers	Car Capacity		FIRST CLASS		Distance from Virginia	Time Table No. 59. Effective March 5, 1950	STATIONS	Telegraph Calls	Distance from Swan River	SIGNS	FIRST CLASS		SECOND CLASS	
	Sidings	Other Tracks		75 D.M. & I.R. 1							76 D.M. & I.R. 2	422		
													Daily	Daily
YC17	Yard	102			0.47	VIRGINIA	VA	50.76	RDPXY					
					1.00	D. W. & P. RY. CRESCENT AVE. CROSSING		50.29	I					
					1.20	D. M. & I. R. RY. CROSSING		49.76	I					
					1.70	D. W. & P. RY. VIRMOUNT CROSSING		49.56	I					
					9.70	D. M. & I. R. RY. CROSSING		41.06						
YC7	45				10.11	LUCKNOW		40.65	PW					
					11.86	D. M. & I. R. SHERWOOD JCT.		38.90	X					
YC5 1/2	20	54			12.08	BUHL	BU	38.68	DPX					
					13.00	D. M. & I. R. FRAZER YARD		37.76	PX					
					16.35	D. M. & I. R. WILPEN JCT.		34.41	P					
					17.94	DUNWOODY JCT.		32.82						
YD59	Yard	127			19.09	EMMERT TOWER		31.67	PWIX					
					19.80	D. M. & I. R. RY. CROSSING								
					20.58	NORTH MITCHELL		30.96	PXI	A 1.22Pm				
					21.68	RUBY JCT.		30.18	PX	1.19				
					22.21	HIBBING		29.18	RDPX	L 1.15Pm				
					25.81	SCRANTON MINE CROSSING		28.55	IX					
YB25 1/2	Yard	1329			25.81	KELLY LAKE	KY	25.45	BRKDNP WCYXJO			A 3.40Am		
YB16	62				36.18	BENGAL		14.63	P			3.10		
YB6	68				44.59	GOODLAND		6.17	P			2.40		
Y178		72			50.76	SWAN RIVER	WA		JDNP WYI			L 2.20Am		
					8 13 7					.7 14.6		1.20 19 0		

Westward trains are superior to eastward trains of the same class.
SEE ADDITIONAL SPECIAL INSTRUCTIONS PAGES 11 THROUGH 19.

WESTWARD

ELEVENTH SUBDIVISION

EASTWARD

Station Numbers	Car Capacity		FIRST CLASS		Distance from Kelly Lake	Time Table No. 59. Effective March 5, 1950	STATIONS	Telegraph Calls	Distance from Gunn	SIGNS	FIRST CLASS	
	Sidings	Other Tracks		87 D.M. & I.R. 3							88 D.M. & I.R. 4	
												Daily
YB 25 1/2	Yard	1329				KELLY LAKE	KY	31.32	BRKDNP WCYXJO			
YD 64	18				4.02	KEEWATIN	KW	27.80	DPX			
YD 69	90				4.86	MOORE		26.46	PX			
YD 74	388				9.59	NASHWAUK	N	21.73	DPWX			
	27				11.47	KEVIN		19.44	P			
YD 80	406				16.19	CALUMET	CU	15.13	JDPWX	A 1.26Pm		
YD 82	3				17.08	MARBLE	RB	14.24	DPX	s 1.24		
					20.58	HOLMAN JCT.	HO	10.74	P1	f 1.17		
YD 86					21.60	TACONITE JCT.	NI	9.72	P	s 1.15		
						DANUBE			P			
YD 88	56				28.43	BOVEY	BY	7.89	DP	s 1.07		
YD 89	19				24.24	COLERAINE	CR	7.08	DP	L 1.05Pm		
					25.56	CANISTEO		5.76	PWXY			
Y 161	100	193			31.32	GUNN	GU		JPWYI			
					.23 21.0					.21 23.0		

Westward trains are superior to eastward trains of the same class.
SEE ADDITIONAL SPECIAL INSTRUCTIONS PAGES 11 THROUGH 19.

ALL SUBDIVISIONS

1. Omitted.

2. SPEED RESTRICTIONS GENERAL.

(a) Maximum permissible speed of passenger and freight trains, except Streamliners, will be designated by distinctive reflectorized roadway signs set in an upward angle of 45 degrees. Except as directly affected by speed restrictions prescribed below and other speed restrictions covered by Item No. 2 under individual Subdivisions, the 45 degree signs prescribe the speed territories and the numerals thereon indicate in miles per hour the maximum permissible speed which will govern until the next territory is reached.

When the movement is from a higher to a lower speed territory the 45 degree sign is located approximately one mile from the point where the lower speed becomes effective. When the movement is from a lower to a higher speed territory, the 45 degree sign is located at the point where speed may be increased.

When operating against the current of traffic in double track territory, trains must not exceed the maximum permissible speed prescribed by the 45 degree sign with the current of traffic. This does not modify Rule 93.

When the 45 degree sign has two sets of figures, the numerals preceded with letter "P" apply to passenger trains, except Streamliners, and letter "F" to freight trains.

(b) When passenger trains are handled by freight engines or when freight cars, except cars equipped with passenger trucks and steel wheels, are handled in passenger trains, the train will not exceed maximum permissible speed for freight trains in the territory operated.

(c) Speed shown on Speed Limit Plate on engines must not be exceeded.

(d) Steam engines backing up	20 MPH
Steam engines in forward motion running light or with caboose only	35 MPH
Diesel and Electric engines, light or with caboose only	50 MPH
Trains handling steam derricks, pile drivers, ditchers, cranes, steam shovels, dozers, etc., on Main Lines	25 MPH
except on 6 degree curves or sharper, and on Branch Lines	15 MPH
Trains handling ore cars or air dump cars loaded with ore or gravel, and scale test cars, on Main Lines except on 6 degree curves or sharper, and on Branch Lines	30 MPH
Trains handling carload poles or piling on open cars when operating on double track, siding or other adjacent track must stop meeting or being passed by passenger trains, for other trains reduce speed to	10 MPH
Unless conditions require a further speed restriction, trains or engines moving against the current of traffic on double track through interlockings	15 MPH
Trains or engines moving on main routes actuating points of spring switches	35 MPH
Trains or engines moving in facing point direction at spring switches without facing point lock	25 MPH
Trains or engines through No. 20 turnouts at:.....	35 MPH
SaundersCrossover switches between eastward and westward main tracks.	eastward
BoylstonCrossover switches between eastward and westward main tracks.	eastward
DedhamEast and west siding switch.	
AskovEast and west siding switch.	
Hinckley Tower..East and west siding switch.	
Brook ParkEast and west siding switch.	
Brook Park Jct...Junction switch to 2nd Subdivision.	
GrasstonEast and west siding switch.	
Coon Creek Jct...Junction switch to 1st Subdivision.	
Coon CreekCrossover switches between N. P. and G. N. main tracks.	

BrookstonCrossover switches between eastward and westward main tracks.
Junction switch to 8th Subdivision.
Swan RiverEnd of double track.
Junction switch to 10th Subdivision.
PhilbinEast and west siding switch.

Trains or engines through No. 15 turnouts at: 25 MPH
Central Ave.

TowerCrossover switches between eastward and westward main tracks.
SaundersJunction switch to 7th Subdivision.
BoylstonJunction switch to 3rd Subdivision.
Bridge A-9End of double track.
Bridge 29East and west switch of gantlet.
GunnJunction switch to 3rd Subdivision.
Gunn YardJunction switch to 11th Subdivision.

Trains or engines through all other turnouts..... 15 MPH

3. MOVEMENT OF ENGINES DEAD IN TRAINS.

Class O and larger engines will be placed not to exceed 15 cars behind road engine. In electrified zone only class R engines will be handled on head end, all others near rear.

Class F-8 and smaller engines will be placed next ahead of caboose.

Diesel and Gas-Electric engines 2300-2341 must be handled on rear of train.

Not less than five cars will be placed between all engines.

Trains handling steam engines dead in train with side rods on both sides will not exceed 40 MPH; and without side rods will not exceed 10 MPH.

Trains handling Electric, Diesel and Gas-Electric engines in tow dead in train will not exceed following speeds:

50	35 MPH
75 to 170	45 MPH
175 to 231 and 271	60 MPH
252 to 259-262 to 265-300 to 306-400 to 456	45 MPH
260-261-266 to 270	65 MPH
350 to 376-500 to 512	75 MPH
2300 to 2324	50 MPH
2325 to 2341	60 MPH
5000 to 5008B	45 MPH
5010 to 5019	55 MPH

4. Under Rule 2, watches that have been examined and certified to by a designated inspector must be used by train dispatchers and yardmen.

5. Brakemen with less than one year of experience should not be used as flagmen except in emergency, and then Superintendent will be notified by wire.

6. When operating snow machines in non-block signal territory no train should be permitted to follow closer than a station apart, when that cannot be done they will be blocked not less than thirty minutes apart.

7. After severe blizzard or dirt storm, employes on first train over road must exercise care to avoid accident caused by striking drift without first having drifts faced with hand shovels, cutting in far enough to get beyond the hard snow and giving a perpendicular wall to strike against instead of slope or wedge-like shape. When operating snow dozer, conductor in charge will ride in the dozer.

On snow and dirt dozers every precaution must be taken to see that cage, flangers and wings clear all obstacles when in service and are properly secured when in through trains, and dozers properly turned. Hand screws must be tightened to raise flanger on dozers as high as possible before making a back-up movement, and must not be released until the dozing work is actually to start. Hand screws holding the cage on dozers must be tightened or chains otherwise fastened except when dozer has air in cylinders and is attended by an employe.

8. Loaded dump cars should not be handled on double track after dark, but if necessary to do so, close watch must be kept by trainmen and if a car dumps its load, train must be stopped and protection afforded on the opposite track.

9. Baggage cars returned deadhead when moved in storage mail service in opposite direction will be accompanied by waybill carrying notation "Deadhead mail car, no material of any character other than U. S. Mail or mail sacks to be loaded in it." Conductors will be held responsible for compliance of waybill instructions.
10. Omitted.
11. Unless otherwise provided, when passenger trains are operated against current of traffic on double track or through sidings, conductors shall notify Railway Postal Clerks, trains shall stop at points where U. S. Mail is usually picked up and Conductors are responsible for delivery of mail to Postal car.
12. Conductors will report by wire, all flat spots on wheels of passenger cars. Any cars having flat spots on wheels of more than two and one-half inches long must be set out.
13. Due to limited overhead clearance at tunnels and structures, employees are warned to keep off top of cars of extreme height and width when handled in trains and yards, also such standing cars in electrified zone, except in emergency. In absence of previous advice on such cars, wire proper officer for instructions.
14. The Railway Company is responsible for proper handling of perishable freight on road and at points where Western Fruit Express Company do not maintain representatives. Conductors on trains handling perishable freight will ascertain from waybills class of service required and light or extinguish heaters and manipulate vents in accordance with current instructions provided for handling perishable freight issued by the National Perishable Freight Committee.
15. Placarded loaded tank cars moving in through freight trains must be placed not less than 6th car from engine or caboose; cars placarded "Explosives", "Inflammable", or "Corrosive Liquids", not less than 16th car from road engine, one car from helper engine and 11 cars from caboose. These cars may be handled second car from engine or caboose in local trains. These cars must not be placed in trains next to each other, next to refrigerators equipped with gas burning heaters, stoves or lanterns, or flat cars loaded with logs, poles, lumber, pipe, rails, iron, steel, and gondola cars with such lading higher than ends, or cars of similar lading that is liable to shift. Carload express shipments of explosives, sealed and placarded, may be handled on passenger trains; LCL shipments may be made in so-called peddler car with messenger in charge when such car is assigned to the handling of express and baggage exclusively, provided shipments are accompanied by authorized representative of United States Government while on trains. Terminals or pick-up points enroute must furnish conductor and engineer Form 250 showing consecutively location in train of all cars placarded "Explosives". At points other than terminals where crews change notice will be transferred from crew to crew. Further details governing handling of Explosives, Inflammable and Corrosive Liquids may be found in I.C.C. Regulations.
16. Gas-Electric engines must not be fueled while occupied by passengers, or coupled to cars occupied by passengers.
17. The normal position of a spring switch with facing point lock is identified by a color light type signal displaying a "lunar white" light for train or engine movements in a trailing point direction and for movements in facing point direction when conditions require. The normal position of a spring switch without facing point lock is identified by a triangular yellow target on switch stand with letter "S" in black, and "lunar white" light in switch lamp in place of green light displayed in both directions through or over the switch. Trains departing from stations, either from siding or main track in trailing point movement actuating points of spring switches, a member of crew must observe indication of governing signal in opposite direction after rear end of train has passed through switch to ascertain if switch points return to

normal position. If this signal indicates Stop and no immediate train movement or other cause is evident, report the fact to Superintendent from first available point of communication.

During and immediately following snow storms or violent wind storms, spring switches must be operated by hand and relined in normal position before heading out through switch in trailing point movement, actuating switch points, to insure switch is in proper operating condition.

INDICATORS AT SPRING SWITCHES.

A Switch Indicator, consisting of a single yellow light unit (normally dark) and a switch-key-controller mounted on an iron mast located at clearance point of a siding, must be operated by a member of the crew who, together with engineer, must observe and be governed by its indication before fouling main track or making movement from siding to main track through a spring switch in automatic signal territory, unless the movement is made immediately after an opposing train has passed the switch, and Automatic Signal at leaving end of siding indicates "Proceed".

If Indicator displays a yellow light when switch-key-controller is operated, train or engine movement to main track may be made immediately in accordance with train rights and operating rules. Display of yellow light must continue until leading wheels have passed clearance point.

If Indicator does not display a yellow light when switch-key-controller is operated, train or engine movement to main track may be made in accordance with train rights and operating rules, after operating spring switch by hand; waiting three minutes and taking every precaution to provide proper protection.

To operate Switch Indicator, insert switch key in controller and turn clockwise toward "R", hold a few seconds, and remove key. If yellow light is displayed and intended movement is not made, insert switch key in controller and turn counter-clockwise toward "N" to restore signal system to normal condition to avoid delay to trains on main track.

Switch-key-controller must never be operated toward "N" after having been operated toward "R" if intended movement to main track is to be made.

18. DRAGGING EQUIPMENT DETECTOR INDICATOR consists of a single white light unit (normally dark) with circular background mounted on signal or other mast. When white light is displayed, train must be stopped and inspected for dragging equipment. Notify Superintendent from first available point of communication.
19. Facing point locks on hand operated switches are indicated by a six-inch yellow stripe painted on target staff. Be positive locking device is restored to normal position after using. A running switch must not be made through this type switch.
20. Under Rule 24, engine number only will be displayed in indicators on engines so equipped. This will also apply when our engines are operating over Northern Pacific tracks. Between Klamath Falls and Chemult, Southern Pacific Rules will govern.
21. Rule 204 (A) prescribes that copies of train orders will be furnished the rear trainman, such orders will only be furnished on trains designated. Nos. 1, 2, 3, 4, 7, 8, 9, 10, 28, 29, 30, 355, 358, 359, 360 and sections thereof; also, extra passenger train whether operated as a section of regular train or as a passenger extra.
22. Air hose on Diesel and Electric engines must be hooked up in hose fastener when not in use.
23. Before leaving any engine terminal enginemen will make proper tests and inspections of water glasses, gauge cocks, water column and injectors, and will not leave the terminal unless all these are in proper working order. Should enginemen on steam engines find that the water is not in sight in water glasses, and if water cannot be raised to bottom gauge cock or water glass by opening throttle, on oil burning engines the fire must be extinguished immediately and on coal burning engines the fire must be knocked out or smothered

6. Extra trains will use double track in direction of current of traffic between 25th St., Superior, and Boylston without train orders or clearance. Second class trains will proceed in same manner from 25th St., Superior, to Central Ave. Tower, where they will receive train orders or clearance.

7. Saunders, during period interlocking out of service, normal position of main track switch on Seventh Subdivision leading to yard is for No. 1 track.

8. Hinckley, automatic block signal 72.1 governing westward trains, is located on left hand side of main track about 500 feet west of depot.

9. SPEED TEST BOARDS.

Engineers shall test speed of their trains passing following point as compared with Speed Table:

Westward, between MP 76 and MP 77 approximately 4 miles west of Hinckley Tower.

Eastward, between MP 77 and MP 76 approximately 3 miles east of Brook Park.

10. CROSSOVERS ON DOUBLE TRACK.

Facing Point	Trailing Point
Saunders, east crossover	Central Ave.
Boylston	Saunders, at tower.
	Saunders, west crossover

11. SPRING SWITCHES WITH FACING POINT LOCK.

Dedham, east and west siding switch.

Nickerson, east and west siding switch.

Askov, east and west siding switch.

Grasston, east and west siding switch.

Cambridge, east and west siding switch.

Bethel, east and west siding switch.

Normal position is for main track.

12. SPRING SWITCHES WITHOUT FACING POINT LOCK.

Superior, east switch of Eastward and Westward incoming tracks. Normal position is for incoming tracks and all other round-house lead switches, when not in use, must be left lined for roundhouse lead.

Elevator "X", east and west of car unloader on unloading track. Normal position of switch west of unloader is for unloading track.

Normal position of switch east of unloader is for runaround track.

13. MANUAL INTERLOCKINGS.

Central Ave. Tower	N. P. Ry. crossing
Saunders	junction with 7th Subdivision
Boylston	junction with 3rd Subdivision
Hinckley Tower	N. P. Ry. crossing
Coon Creek Jct.	junction with N. P. Ry.

14. MANUAL INTERLOCKINGS WITH DUAL CONTROL SWITCHES.

Brook Parkeast and west siding switch

Brook Park Jct.junction switch to 2nd Subdivision

Hinckley Towerwest siding switch

Sandstoneeast and west yard switch

15. AUTOMATIC INTERLOCKINGS.

73rd St.,MStP&SSM. RR. Crossing

16. SWITCH INDICATOR.

Saunders, located at east switch of crossover on westward main track. Instructions for operation of indicator posted in adjacent box.

SECOND SUBDIVISION

(Milaca Line)

1. MAXIMUM PERMISSIBLE SPEED FOR TRAINS.

Between	Passenger	Freight
Brook Park Jct. and East St. Cloud.....	50 MPH	40 MPH

2. SPEED RESTRICTIONS.

Bridge 46.3, Mora, R engines 20 MPH

Bridge 54.2, Quamba, R engines 20 MPH

Between Home Signals of Interlockings at: 20 MPH

Brook Park Jct.

East St. Cloud.

3. TRAIN REGISTER EXCEPTIONS.

Milaca, register only for trains originating and terminating.

4. CLEARANCE PROVISIONS AND EXCEPTIONS RULE 83(B).

(a) At Brook Park Jct., trains for which this point is initial station may proceed on authority of clearance under which such trains arrive.

(b) At Milaca Jct., clearance under which Nos. 305 and 315 arrive will clear Nos. 316 and 306, respectively, at that point.

5. Mora, switch-key-controller located at Griswold Signals. When train or engine is stopped on main track within automatic approach control section of crossing signals and will not foul crossing, signals may be set clear for highway traffic by inserting switch key in controller and turn to right. After signals have been set clear, they may be changed to indicate "Stop" to highway traffic by inserting switch key in controller and turn to left.

6. Between St. Cloud and East St. Cloud trains will be governed as follows:

Eastward trains to 2nd Subdivision must secure clearance at St. Cloud and must know before leaving there that route is clear at N. P. Ry. crossing, East St. Cloud.

Westward trains from East Side Line will be governed by interlocking signal at N. P. Ry. Jct.

Westward trains from 2nd Subdivision will be governed by interlocking signal at East St. Cloud.

Operator East St. Cloud will secure authority from operator St. Cloud before clearing interlocking signal for westward trains.

7. SPRING SWITCHES WITHOUT FACING POINT LOCK.

St. Cloud, east yard lead switch Eighth Ave.

Normal position is for yard lead.

Eastward trains on main track have preference over eastward trains on yard lead. When an eastward train on yard lead is to move to main track while an eastward train on the main track is standing in the approach circuit, trainman shall operate push button "R" located on signal 746.

8. MANUAL INTERLOCKINGS.

East St. CloudN. P. Ry. crossing

THIRD SUBDIVISION

(Main Line)

1. MAXIMUM PERMISSIBLE SPEED FOR TRAINS.

Between	Passenger	Freight
Boylston and Floodwood	50 MPH	40 MPH
Floodwood and Cass Lake	55 MPH	45 MPH

2. SPEED RESTRICTIONS.

Bridge 75.1, Floodwood, R engines	20 MPH
Grand Rapids, through city limits	15 MPH
Deer River, through city limits	15 MPH
Between Home Signals of Interlockings at:	20 MPH

Bridge 29, westward.
Schley.

Cass Lake, on all tracks over footwalk crossing located just east of coaling station 8 MPH

Whistle signal must be sounded as prescribed by rule. Crossing must be cut immediately. When this crossing is blocked by coupling up train, trainmen must remain at the crossing to prevent pedestrians from crawling through the cars. Engines must not be blown down within 100 feet of this crossing.

3. TRAIN REGISTER EXCEPTIONS.

Boylston, all trains register by ticket.

Eastward freight trains will throw off a register check at Boylston giving all information called for in the train register except arrival and tie up.

4. CLEARANCE PROVISIONS AND EXCEPTIONS RULE 83(B).

At Boylston, trains for which this point is initial station may proceed on authority of clearance under which such trains arrive when train order signal indicates proceed.

5. Double track extends between Boylston and Swan River, except gantlet over Bridge 29, which is governed by interlocking signals.

6. Cloquet, derails located near east end storage tracks Nos. 1 and 2 are not provided with derail signs.

7. Cloquet, when setting out cars on either end of No. 1 track be sure cars are shoved down far enough to clear N. P. Ry. crossovers.

8. Brookston, special signal consisting of horn and yellow light is located north of westward main track just west of coaling station to inform crews of eastward ore trains from Casco and Gunn lines when carmen have completed inspection and train is in condition to proceed.

Carmen will operate horn and light by means of push button located on telegraph pole about 300 feet west of block signal 58.8 in accordance with the following code:

(a) One blast of horn and one flash of yellow light indicates train will not proceed until further instructed.

(b) Two blasts of horn and two flashes of yellow light indicate train from Gunn Line may proceed.

(c) Three blasts of horn and three flashes of yellow light indicate train from Casco Line may proceed.

9. Swan River, train orders and messages delivered by hoop to eastward trains will be delivered from the south or right hand side.

10. Philbin, siding must be used by eastward trains only, unless otherwise authorized by train order.

11. Grand Rapids, switch-key-controller located on depot. When train or engine is stopped on main track within automatic approach control section of crossing signals and will not foul crossing, signals may be set clear for highway traffic by inserting switch key in controller and turn to right. After signals have been set clear, they may be changed to indicate "Stop" to highway traffic by inserting switch key in controller and turn to left.

12. Grand Rapids, when setting out cars, eastward freight trains will stop and leave train west of west switch; westward trains will stop east of the first public crossing.

13. Deer River, daily except Saturday, eastward freight trains will set out all cars destined Grand Rapids other than perishable and rush cars.

14. SPEED TEST BOARDS.

Engineers shall test speed of their trains passing following point as compared with Speed Table:

Westward, between MP 86 and MP 87 approximately 4½ miles west of Island.

Eastward, between MP 87 and MP 86 approximately 2 miles east of Wawina.

15. CROSSOVERS ON DOUBLE TRACK.

Facing Point	Trailing Point
State Line, west crossover	State Line, east crossover
Carlton, east crossover	Carlton, west crossover
Cloquet, west crossover	Cloquet, east crossover
Brookston, east crossover	Flint Pit
Brookston, 1 mile west of	Brookston, west crossover
Swan River, east crossover	Mirbat
	Floodwood
	Swan River, west crossover

16. SPRING SWITCHES WITH FACING POINT LOCK.

Brookston, east switch of crossover between main tracks.

Normal position is for main track.
west switch of crossover between main tracks.

Normal position is for crossover.
switch leading to Casco Line (8th Subdivision) from westward main track.

Normal position is for main track.

Swan River, end of double track.

Normal position is for eastward main track.

Philbin, east siding switch.

Normal position is for main track.
west siding switch.

Normal position is for siding.

Cass Lake, east yard switch.

Normal position is for main track.

Instructions governing operation of spring switches at Brookston:

Switch, Casco Line to storage track, is a hand operated switch. Normal position is for storage track. Reversing this switch for movement to Third Subdivision causes automatic block signals on both main tracks to indicate stop. Switch must not be lined for Third Subdivision while movement is being made between signals 57.9 and 58.0.

Block signal 58.0 located just west of the Casco line switch, between the Casco line and westward main track, governs eastward trains from Casco Line across westward main track, through the crossover, and the eastward main track.

Block signal 58.0 will display an approach indication within a few seconds after Casco Line—storage track switch is reversed for movement to Third Subdivision provided spring switches are in proper condition for movement to eastward main track and there is no conflicting train movement in the block on eastward or westward main tracks. If there is a conflicting movement approaching on either main track, the approach indication on signal 58.0 will not be displayed until a time interval of approximately two minutes has elapsed.

17. SPRING SWITCHES WITHOUT FACING POINT LOCK.

Cass Lake, west crossover switch to roundhouse lead
incoming roundhouse track
outgoing roundhouse track

Normal position is for tracks named.

18. DRAGGING EQUIPMENT DETECTOR INDICATOR.

Eastward trains, on signal 30.2 approximately one mile west of Bridge 29.

19. **MANUAL INTERLOCKINGS.**

Boylstonjunction with 1st Subdivision
State Line TowerN. P. Ry. crossing
CarltonN. P. Ry. crossing

20. **MANUAL INTERLOCKINGS WITH DUAL CONTROL SWITCHES.**

Swan Rivercrossover and junction with 10th Subdivision
Gunnjunction with 11th Subdivision

21. **AUTOMATIC INTERLOCKINGS.**

Bridge 29gantlet
Philbineast and west siding switch
Schley, 2.04 miles west of.....MStP&SSM. RR. crossing
Bridge 29:

Release for westward route on westward track is located in release box at eastward home signal.

Release for eastward route on eastward track is located in release box at westward home signal.

Cranks for hand operation of smashboards are attached by chains to the mechanism.

If train moving against the current of traffic is stopped by dwarf signal, trainman will operate release located in release box nearest the dwarf signal, and if signal does not indicate proceed when release returns to normal position, trainman may flag train through gantlet making certain that smashboard at opposite end of gantlet is in the reverse position.

Philbin:

Interlockings at the east and west siding spring switches operate automatically for all movements, except westward movements to the siding at the east switch, and eastward movements to the main track at the west switch, which require hand operation of spring switch. Eastward trains on siding take preference over eastward trains on main track approaching east switch, and westward trains on main track take preference over westward trains on siding approaching west switch. For further information see instructions posted in push button boxes, located at eastward home signal at east switch, and at westward home signal at west switch.

22. **SWITCH INDICATOR.**

Cloquet, Switch Indicators, each consisting of a yellow light unit (normally dark) and a switch-key-controller mounted on an iron mast, located near the east yard switch and both ends of crossover between main tracks at east end of the yard, must be operated by a member of the crew, who, together with the engineer, must observe and be governed by their indications before lining switches, fouling main track, or making crossover movement from one main track to the other.

See further instructions posted on iron mast.

FOURTH SUBDIVISION

(Main Line)

1. **MAXIMUM PERMISSIBLE SPEED FOR TRAINS.**

Between	Passenger	Freight
Cass Lake and Crookston Yard	55 MPH	45 MPH

2. **SPEED RESTRICTIONS.**

Bemidji, through city limits	6 MPH
Between Home Signals of interlockings at:	20 MPH
Bemidji.	
Erskine, eastward.	
Crookston Yard.	

3. **ENGINE RESTRICTIONS ON INDUSTRY TRACKS.**

Q-1 engines on Land O'Lakes Spur, Fosston	5 MPH
Q-1 engines on MStP&SSM. RR. transfer track, Erskine	5 MPH

4. **TRAIN REGISTER EXCEPTIONS.**

Bemidji, Tilden Jct. and Crookston Yard, register only for trains originating and terminating at these stations, except Nos. 35 and 36 will register at Tilden Jct.

5. **CLEARANCE PROVISIONS AND EXCEPTIONS RULE 83(B).**

(a) At K Line Jct., clearance under which Nos. 105 and 107 arrive will clear Nos. 108 and 106, respectively, at that point.
(b) Mesabi Division clearance received at Crookston will clear train at Crookston Yard.

6. **SPEED TEST BOARDS.**

Engineers shall test speed of their trains passing following point as compared with Speed Table:

Eastward, between MP 86 and MP 87 approximately 2 miles east of Wilton.

Westward, between MP 87 and MP 86 approximately 3 miles west of Bemidji.

7. **MANUAL INTERLOCKINGS.**

Bemidji	N. P. Ry. crossing
Erskine	MStP&SSM. RR. crossing
Tilden Jct.	N. P. Ry. crossing

8. **AUTOMATIC INTERLOCKINGS.**

Crookston Yard, 2.37 miles east of.....N. P. Ry. crossing

FIFTH SUBDIVISION

(Park Rapids Line)

1. **MAXIMUM PERMISSIBLE SPEED FOR TRAINS.**

Between	Passenger	Freight
Park Rapids Jct. and K Line Jct.	35 MPH	30 MPH

2. **SPEED RESTRICTIONS.**

Between Home Signals of Interlockings at: 20 MPH
Park Rapids Jct.
Wadena.

3. **CLEARANCE PROVISIONS AND EXCEPTIONS RULE 83(B).**

(a) At K Line Jct., clearance under which Nos. 105 and 107 arrive will clear Nos. 108 and 106, respectively, at that point.
(b) Mesabi Division clearance received at Sauk Centre will clear train at Park Rapids Jct.

4. **K Line Jct., normal position south wye switch is for west leg of wye.**5. **AUTOMATIC INTERLOCKINGS.**

Park Rapids Jct., 0.52 miles west of	N. P. Ry. crossing
Wadena, 0.23 miles west of	N. P. Ry. crossing

SIXTH SUBDIVISION

(Princeton Line)

1. **MAXIMUM PERMISSIBLE SPEED FOR TRAINS.**

Between	Passenger	Freight
Elk River and Milaca Jct.	20 MPH	20 MPH

2. **SPEED RESTRICTIONS.**

Between Home Signals of Interlocking at Elk River.... 20 MPH

3. **CLEARANCE PROVISIONS AND EXCEPTIONS RULE 83(B).**

(a) Mesabi Division clearance received at Elk River will clear train at N. P. Ry. Jct.

(b) At Milaca Jct., clearance under which Nos. 305 and 315 arrive will clear Nos. 316 and 306, respectively, at that point.

4. **SEMI-AUTOMATIC INTERLOCKINGS.**

Elk River, 0.74 miles west ofN. P. Ry. Jct.
Complete instructions for operation of interlocking are located at "Release" box.

SEVENTH SUBDIVISION

(Allouez Line)

- 1. MAXIMUM PERMISSIBLE SPEED FOR TRAINS.**

Between	Passenger	Freight
Saunders and Allouez	20 MPH	20 MPH
- 2. SPEED RESTRICTIONS.**
 Between Allouez and Saunders, all trains and engines will be governed by Rule 93.
- 3. Double track extends between Allouez and east end Bridge A-9.**
- 4. Extra trains will use double track with current of traffic between Allouez and east end Bridge A-9, and also single track between east end Bridge A-9 and Saunders without train orders or clearance.**
- 5. Allouez Ore Docks, when doubling two tracks of empty cars, first pull track with the most cars down to clear then double the shorter track to it.**
 When coupling up a track of cars on the dock and there are cars on the outer end, set sufficient hand brakes, not less than two, on outer cars to hold slack before coupling into them.
- 6. Allouez Ore Dock No. 4, engines moving on Tracks 1 and 2 or 3 and 4 must stop and know there is sufficient side clearance before passing each other.**
- 7. SPRING SWITCHES WITHOUT FACING POINT LOCK.**
 Allouez, Roundhouse wye tracks,
 Normal position west switch is for west leg of wye,
 north switch is for east leg of wye,
 east switch is for north coal chute track.
- 8. MANUAL INTERLOCKINGS.**
 Saundersjunction with 1st Subdivision
- 9. MANUAL INTERLOCKINGS WITH DUAL CONTROL SWITCHES.**
 Bridge A-9End of double track.

EIGHTH SUBDIVISION

(Casco Line)

- 1. MAXIMUM PERMISSIBLE SPEED FOR TRAINS.**

Between	Passenger	Freight
Brookston and Kelly Lake	45 MPH	35 MPH
Bridge 59.3 and Curve 1.50 miles west of Brookston	15 MPH	15 MPH
- 2. AUTOMATIC INTERLOCKINGS.**
 Riley, 0.81 miles east ofD. M. & I. R. Ry. crossing

NINTH SUBDIVISION

(Chisholm Line)

- 1. SPEED RESTRICTIONS.**
 All trains will approach mining spurs at restricted speed.
- 2. Between Duncan Jct. and depot Chisholm, all trains and engines will be governed by Rule 93.**
- 3. Between Chisholm and DM&IR. Dunwoody Jct. trains will be governed as follows:**
 Between DM&IR. Dunwoody Jct. and Duncan Jct., G. N. trains will use DM&IR. Ry. tracks and be governed by their rules and special instructions.

Normal position of switch DM&IR. Dunwoody Jct. is for DM&IR. main track.

Between Duncan Jct. and G. N. Chisholm Jct., DM&IR, trains will use G. N. Ry. tracks and be governed by G. N. rules and special instructions.

Authority for train movements between Dunwoody Jct. and G. N. Chisholm Jct. is controlled by DM&IR. Ry. Eastward trains will secure clearance and orders through DM&IR. operator at Mitchell.

Westward trains will secure clearance and orders from G. N. operator at Chisholm who must obtain authority from DM&IR. before issuing.

TENTH SUBDIVISION

(Swan River—Virginia Line)

- 1. MAXIMUM PERMISSIBLE SPEED FOR TRAINS.**

Between	Passenger	Freight
Swan River and Emmert	45 MPH	35 MPH
Emmert and Virginia	35 MPH	30 MPH
- 2. SPEED RESTRICTIONS.**
 All trains, except first class, will approach mining spurs at restricted speed.
 Hibbing, through city limits 15 MPH
 Between Home Signals of Interlockings at: 20 MPH
 Swan River, westward.
 Hibbing.
 North Mitchell.
 Emmert Tower.
 Virginia, D. W. & P., Virmount Tower.
 D. W. & P., Crescent Ave.
- 3. CLEARANCE PROVISIONS AND EXCEPTIONS RULE 83(B).**
 At North Mitchell, Ruby Jct., trains for which these points are initial stations may proceed without a clearance.
- 4. Double track extends between Kelly Lake and Emmert Tower. Trains or engines moving in this territory must keep to the left unless otherwise provided.**
 Trains and engines will run with the current of traffic between Kelly Lake and Emmert Tower without train orders or clearance.
- 5. Between Emmert Tower and DM&IR. Jct. east of Scranton Mine Crossing, G. N. double track will be used jointly by DM&IR. trains. G. N. rules and special instructions will govern.**
- 6. Hibbing, push button controls located on Griswold Signals at First and Third Avenues east for manual control of crossing signals. Instructions covering use of push buttons are posted inside of box. Switch-key-controller located on north side of depot controls signals at Third Avenue east for Westward movements. When a train or engine making westward movement on westward main track is stopped between Fifth and Third Avenues east, and will not foul Third Avenue East, crossing signals may be set clear for highway traffic by inserting switch key in controller and turn to right. After signals have been set clear, they may be changed to indicate "Stop" for highway traffic by inserting switch key in controller and turn to left.**
- 7. Between Wilpen Jct., about 2 miles east of Emmert Tower and east end DM&IR. Fraser Yard, DM&IR. trains will use G. N. main track and be governed by G. N. rules and special instructions. Normal position of switches at both points is for G. N. main track. Before fouling main track, DM&IR crews must obtain G. N. clearance.**

8. Susquehanna Shaft, necessary to shove all empties under the head frame, which will not clear a man on top or side of ore car. Electric lighted sign has been placed about ten feet from the shaft on each of the four tracks under the head frame reading as follows: "Trainmen do not operate past this point. By order of the Minnesota Railroad and Warehouse Commission. (Signed) Superintendent". Crews must stop before shoving under the head frame and brakemen will walk by the shaft to a point where they can give signals in shoving empties onto the tail tracks. Fill the north tail track through the crossover first, as an engine will not go over this crossover. Then fill the south tail track. Will be necessary to pull loads off the south load track before serving the shaft as there is no runaround.
9. Virginia, trains and engines must stop before passing over crossing U. S. Highway No. 53, and a member of crew on ground at the crossing will protect movement.
10. Virginia, trains or engines going beyond "Stop" sign at Columbia Mine must stop and examine clearance between cars under direct loading pocket and runaround track.

11. CROSSOVERS ON DOUBLE TRACK.

Facing Point	Trailing Point
Hull Crusher	Mahoning
Ruby Jct.	Agnew
	Scranton
	Hibbing, east crossover
	Hibbing, west crossover
	North Mitchell

12. SPRING SWITCHES WITHOUT FACING POINT LOCK.

Kelly Lake, west switch transfer cinder pit track,
Normal position is for mallet cinder pit track.
roundhouse wye tracks,
Normal position east switch is for mallet cinder pit track,
south switch is for east leg of wye.
west switch is for west leg of wye.

13. MANUAL INTERLOCKINGS.

Hibbing, 0.58 miles west ofScranton Mine crossing
Emmert TowerD. M. & I. R. Ry. crossing
Virginia, 0.47 miles west ofD. W. & P. Ry. crossing
1.20 miles west ofD. W. & P. Ry. crossing

14. MANUAL INTERLOCKINGS WITH DUAL CONTROL SWITCHES.

Swan Rivercrossover and junction with 3rd Subdivision.
Hibbing, 0.29 miles west ofD. M. & I. R. Ry. Jct.
North MitchellD. M. & I. R. Ry. Jct.

15. SWITCH INDICATORS.

Kelly Lake, 2.23 miles east of, at Agnew-Hull Rust Mine Spur,
Hibbing, 0.34 miles west of, at DM&IR. Ry. Scrap Iron Spur,
Hibbing, 0.31 miles west of, at west switch of G. N. Ry. Industry Track.

Indicator, consisting of a single yellow light unit (normally dark) and a switch-key-controller, mounted on an iron mast located at the clearance point of the turnout, must be operated by a member of the crew who is to line the switch, and who, together with the engineer, must observe and be governed by its indication before fouling the main track or lining the main track switch. See further instructions posted on iron mast.

ELEVENTH SUBDIVISION

(Gunn Line)

1. MAXIMUM PERMISSIBLE SPEED FOR TRAINS.

Between	Passenger	Freight
Kelly Lake and Gunn	45 MPH	35 MPH

2. SPEED RESTRICTIONS.

All trains, except first class, will approach mining spurs at restricted speed.

Between Home Signals of Interlockings at.....	20 MPH
Hill Annex Spur.	
Majorca Mine Spur.	

3. Between Calumet and oil spur, Coleraine, main track will be used jointly by G. N. and DM&IR. Rys. and authority for train movements is controlled by G. N. Ry. and G. N. rules and Special Instructions will govern.

4. Danube Mine Spur, trains must stop not less than fifty (50) feet from grade crossing with blacktop highway. Two members of crew must go out on highway and flag automobile traffic each side of crossing until train movement over grade crossing is completed.

5. Automatic block signals of color light type are located at specified points and govern train and engine movements within station limits and approaches thereto.

At Keewatin, Nashwauk and Calumet, block signals govern movements in both directions, except Keewatin to Nashwauk signals are continuous for westward movements only; at Coleraine-Canisteeo, block signals govern only westward movements; at Moore, block signal located at east siding switch governs eastward movements to "End of Block" sign.

Block signal located at Mesabi Chief Mine spur normally displays indication, Rule 501 AA and governs movements from spur to main track; after lining switch, if no conflicting movement is evident on main track, movement may be made in accordance with signal indication after complying with Rule 513.

6. SPRING SWITCHES WITH FACING POINT LOCK.

Nashwauk, west storage track switch.
Calumet, west new yard switch.
west old yard switch.
Normal position is for main track.

7. SPRING SWITCHES WITHOUT FACING POINT LOCK.

Kelly Lake, west wye switch,
Normal position is for 11th Subdivision.

8. SWITCH INDICATORS.

Calumet, switch indicators consisting of a single yellow light unit (normally dark), with a clockwork release and a push button mounted on an iron mast located at the clearance point of the two yard spring switches, must be operated by a member of the train crew who, together with the engineer, must observe and be governed by its indication before fouling main track or making movement from yard track to main track through these spring switches.

Bennett Mine spur, indicator consisting of a single yellow light unit (normally dark) and a switch-key-controller, mounted on an iron mast located at the clearance point of the turnout, must be operated by a member of the crew who is to line the switch, and who, together with the engineer, must observe and be governed by its indication before fouling the main track or lining the main track switch.

See further instructions posted on iron mast at each point.

WATCH INSPECTORS

Yano Bros., 1121 Tower Avenue	Superior, Wis.
L. G. Howatt, 1425 Tower Avenue	Superior, Wis.
Herbert B. Christensen, Inc., 144 E. 5th Street.....	St. Paul, Minn.
Olson Jewelry Co., 211 East Hennepin Avenue	Minneapolis, Minn.
Oscar P. Gustafson Co., 410 Nicollet Avenue.....	Minneapolis Minn.
Pomerleau & Son, 227 East Hennepin Avenue....	Minneapolis, Minn.
K. K. Thompson	Cass Lake, Minn.
Barker Jewelry, 217 Third Street	Bemidji, Minn.
Paul E. Teske	Hibbing, Minn.
A. J. Vitter	Hibbing, Minn.
Weber Jewelry & Music Co., 714 St. Germain Street	St. Cloud, Minn.

SPEED TABLE

Time Min.	Per Mile Sec.	Miles Per Hour	Time Min.	Per Mile Sec.	Miles Per Hour
	40	90.0	1	12	50.0
	41	87.8	1	14	48.6
	42	85.7	1	16	47.4
	43	83.7	1	18	46.1
	44	81.8	1	20	45.0
	45	80.0	1	22	43.9
	46	78.3	1	24	42.9
	47	76.6	1	26	41.9
	48	75.0	1	28	40.9
	49	73.5	1	30	40.0
	50	72.0	1	33	38.7
	51	70.6	1	36	37.5
	52	69.2	1	39	36.4
	53	67.9	1	42	35.3
	54	66.6	1	45	34.3
	55	65.4	1	50	32.7
	56	64.2	1	55	31.3
	57	63.1	2	—	30.0
	58	62.0	2	10	27.7
	59	61.0	2	20	25.7
1	0	60.0	2	30	24.0
1	1	59.0	2	40	22.5
1	2	58.0	3	—	20.0
1	3	57.1	3	30	17.1
1	4	56.2	4	—	15.0
1	5	55.3	5	—	12.0
1	6	54.5	6	—	10.0
1	7	53.7	7	—	8.5
1	8	52.9	8	—	7.5
1	9	52.1	9	—	6.7
1	10	51.4	10	—	6.0




Business Tracks not shown as stations on Time Table

19

Name	Location	Capacity Cars	Switch Opens
First Subdivision			
Rural Coop. Power Ass'n Spur	2.40 miles east of Cambridge..	6	E
Federal Prison Farm Spur	1.00 miles east of Sandstone..	13	W
Third Subdivision			
Wingate	3.21 miles east of Carlton....	41	E
Lindsay Pit.....	2.0 miles west of Carlton....	70	E
Flint Pit.....	1.77 miles east of Brookston..	120	E
Hartley's Spur.....	1.02 miles west of Island.....	3	E
Webster Lumber Co.....	5.26 miles west of Schley.....	13	E
Cohasset Mill & Lumber Co.	0.50 miles east of Cohasset...	9	E
Chippewa Wood Processing Spur.....	0.123 miles east of Deer River	16	W
Fourth Subdivision			
Benoit Pit.....	2.00 miles west of Benoit.....	157	W
Fifth Subdivision			
Raboin's Spur.....	2.56 miles west of Wilkinson..	9	E
Redwood Rendering Co.....	1.50 miles west of Long Prairie	35	E
Land O'Lakes Creamery Spur	0.60 miles west of Sebeka....	19	W
Peters Meat Products Spur..	0.41 miles west of Long Prairie	10	W
Tenth Subdivision			
Elbern	3.33 miles west of Buhl.....	23	E & W
Grant Mine Oil Spur.....	0.67 miles west of Buhl.....	6	W
Coal Spur.....	2.46 miles east of Buhl.....	3	E
Newcombs Oil Spur.....	1.00 miles east of Hibbing....	4	E
Douglas Shop Spur.....	2.00 miles east of Emmert....	9	W
Eleventh Subdivision			
Minn. Power & Light Spur..	1.00 miles east of Nashwauk..	15	E
Oil Spur.....	0.50 miles west of Coleraine..	35	W

MINE SPURS

Name	Location	Switch Opens
Stevenson, Lamberton.....	0.52 miles east Kelly Lake.....	W
Mahoning, So. Agnew, Pacific Isle	0.72 miles east Kelly Lake.....	W
Hull Crusher.....	1.6 miles east Kelly Lake.....	W
No. Agnew.....	2.1 miles east Kelly Lake.....	W
Scranton.....	2.43 miles west North Mitchell...	W
Susquehanna, Weggum.....	0.71 miles west North Mitchell...	E
Webb, Albany, Longyear.....	0.81 miles east North Mitchell...	E
Dunwoody, Chataco.....	1.70 miles east North Mitchell...	W
Wilpen Jct.....	2.60 miles east Emmert.....	E
Elbern.....	2.87 miles west Buhl.....	W
Grant.....	1.21 miles west Buhl.....	W
Wabigon.....	0.25 miles west Buhl.....	W
Wanless.....	1.4 miles east Buhl.....	E
Kinney, Helmar, Atkins, Wade.	2.94 miles east Buhl.....	E
Wacootah.....	3.33 miles west Virginia.....	E
Hanna.....	2.64 miles west Virginia.....	E
Columbia.....	0.47 miles west Virginia.....	W
Bennett, Russell, Manners, Sec- tion 18.....	2.73 miles west Kelly Lake.....	E
St. Paul, Bennett, Shaft 2.....	0.25 miles east Keewatin.....	E
Sargent, Mississippi, St. Paul- Washer.....	0.34 miles east Moore.....	E
Chieftan.....	0.40 miles east Moore.....	E
Mesabi Chief Washer Aromac Perry.....	0.50 miles west Moore.....	W
Hoadley, York, Galbraith, Argonne	0.16 miles east Nashwauk.....	W
Hawkins.....	0.37 miles east Nashwauk.....	E
Harrison-Quinn.....	0.77 miles west Nashwauk.....	W
Kevin-Patrick.....	2.26 miles west Nashwauk.....	W
Majorca Draper Annex, Barbara	0.73 miles east Calumet.....	W
Hill Annex Yard.....	0.60 miles east Calumet.....	E
Hill Annex Washer, Hill Trum- bull Washer.....	0.70 miles east Calumet.....	E
Hill.....	0.36 miles east Calumet.....	E
Danube, Holman.....	0.37 miles east Bovey.....	W
Arcturas.....	0.25 miles east Holman Jct.....	W
Holman Fines.....	1.83 miles east Bovey.....	E
Greenway.....	2.80 miles east Gunn.....	W
Canisteo, Buckeye.....	1.50 miles west Coleraine.....	W

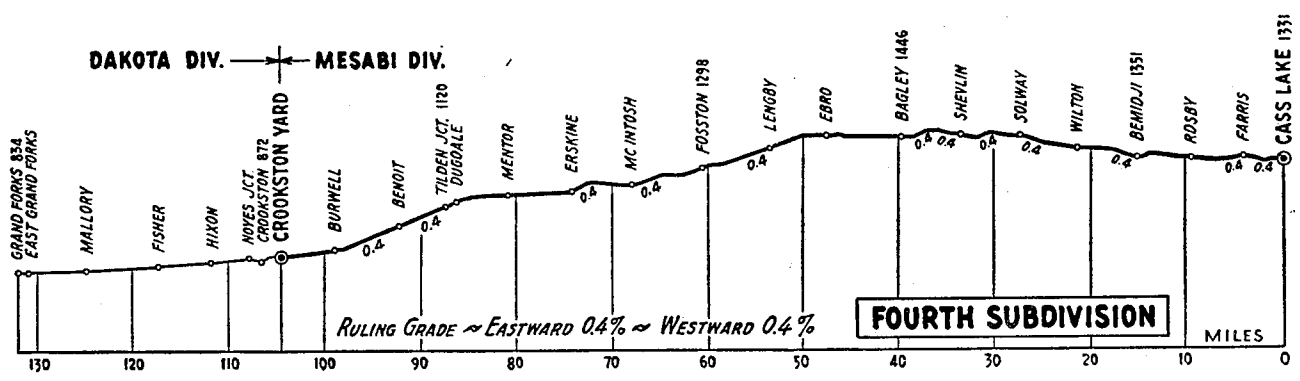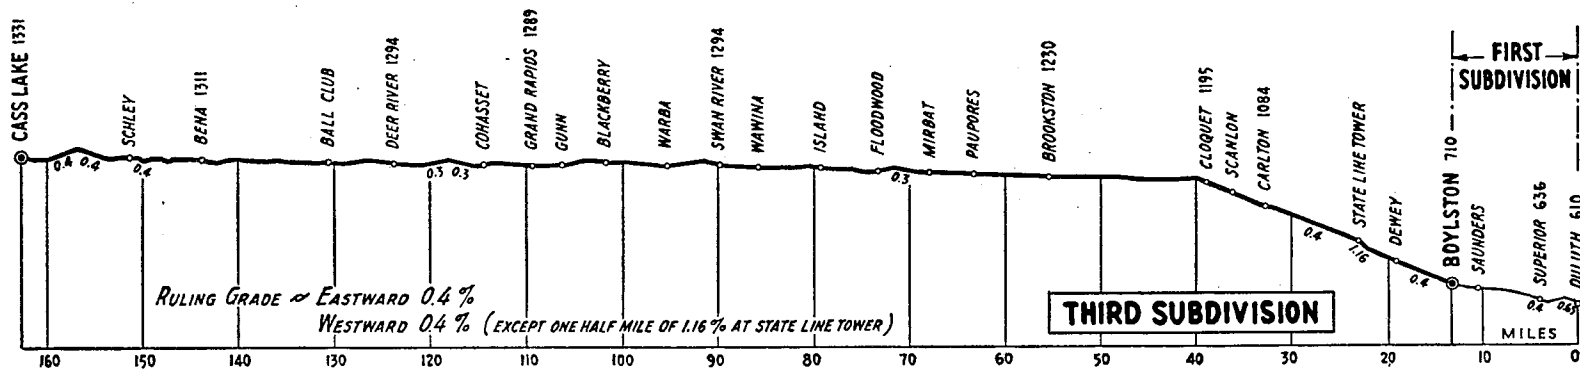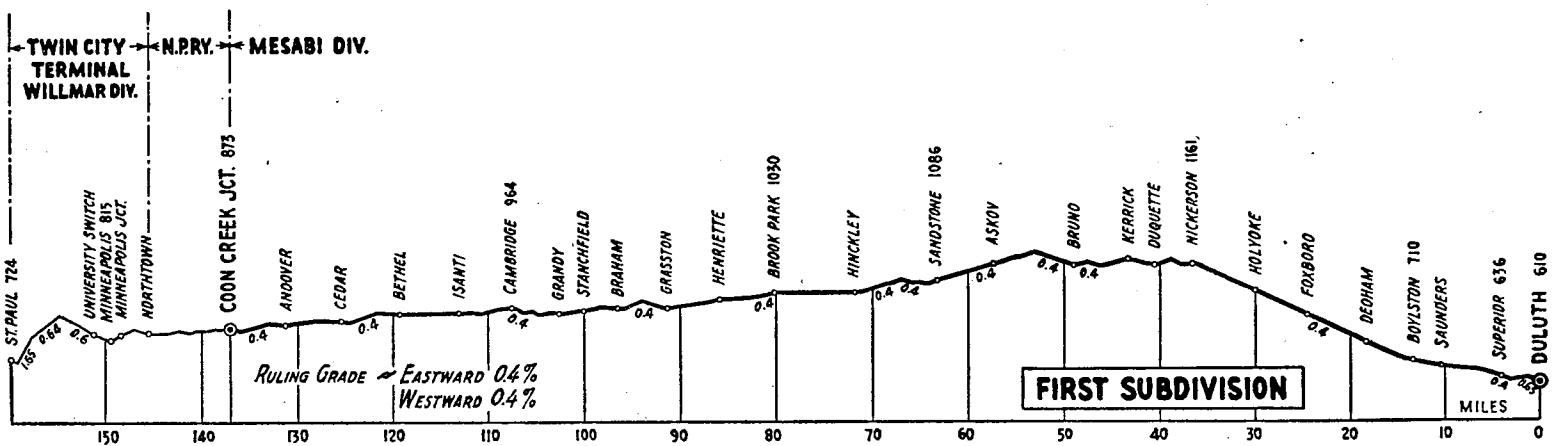

Elevation.....175