COMPANY SURGEONS

COMPANY SURGEONS
*Dr. Roscoe C. Webb, Chief SurgeonMinneapolis, Minn.
*Dr. Ernest A. Anderson, Asst. Chief Surgeon, Minneapolis, Minn.
Dr. James N. Berbos
*Dr. Carson B. Murdy
Dr. William C. KaufmanAppleton, Minn.
Dr. R. P. Griffin
Dr. Donald F. HolmBenson, Minn.
Dr. Louis T. O'Brien
Dr. C. W. JacobsonBreckenridge, Minn.
Dr. Theodore GreenfieldCokato, Minn.
Dr. Joseph C. Houts
*Dr. A. G. Maercklein Ellendale, N. D.
Dr. Earl E. Suckow
Dr. I. L. Oliver
Dr. M. S. Nelson
Dr. M. L. Ransom
Dr. William H. Thomas
*Dr. W. H. Saxton
Dr. O. W. Scholpp
Dr. V. S. IrvineLidgerwood, N. D.
Dr. Karl A. DanielsonLitchfield, Minn,
Dr. B. C. Ford
Dr. F. D. Gray
Dr. W. W. Yeager
*Dr. Fred W. Behmler
Dr. Jack GuyNew London, Minn.
Dr. C. R. Myre
Dr. C. A. Williams
Dr. T. J. BloedelOsseo, Minn.
Dr. Hans Kuisk
Dr. J. H. SingbeilRutland, N. D.
Dr. H. W. GoehrsSt. Cloud, Minn.
Dr. G. H. GoehrsSt. Cloud, Minn.
Dr. Vernon E. NeilsSt. Cloud, Minn.
Dr. F. J. SavageSt. Paul, Minn.
Dr. G. D. BrandSt. Paul, Minn.
*Dr. Darrel E. WestoverSt. Paul, Minn.
*Dr. Abbott SkinnerSt. Paul, Minn
*Dr. A. L. McGilvraSioux Center, Iowa
Dr. Arch F. O'DonoghueSioux City, Iowa
*Dr. H. E. RudersdorfSioux City, Iowa
*Dr. S. A. Donahoe
Dr. G. Robert Bartron
Dr. Walter E. Hinz
Dr. A. M. McCarthy
Dr. Clarence V. Bateman
Dr. Chester B. McVay
*Designates also Examining Surgeon.

OPHTHALMIC SURGEONS (Eve Doctors)

Minneapolis, Minn.
Minneapolis, Minn.
St. Paul, Minn.
St. Paul, Minn.
St. Cloud, Minn.
Sioux City, Iowa
Sioux Falls, S. D.
Willmar, Minn.

ROENTGENOLOGIST (X-Ray only)

Dr.	Rolf M.	Iverson		 	Minneapolis, Minn.
Dr.	David A	Burling	ame .	 • • • • • • •	St. Paul, Minn.

- O. J. LORINSER, Chief Dispatcher.
- V. W. BICE, Trainmaster.
- C. A. KEIL, Trainmaster.
- J. G. TOOMEY, Trainmaster.
- P. D. FRASER, Trainmaster.
- J. H. BOYD, Trainmaster.
- A. C. OOTHOUDT, Trainmaster.
- R. L. AASE, Ass't Trainmaster.
- G. W. McELHINNY, Ass't Trainmaster.

E. S. PINKERTON, Superintendent Terminals, Minneapolis.



GREAT NORTHERN RAILWAY COMPANY

WILLMAR DIVISION

TIME TABLE 87

EFFECTIVE 12:01 A. M.

CENTRAL TIME

Sunday, April 28, 1957

J. P. CAMERON, Superintendent.

R. N. WHITMAN, Asst. General Manager.

C. O. HOOKER, General Manager.

A. W. CAMPBELL, General Superintendent Transportation.

Printed in U.S.A.

2	WES	TW	ARD			·	FIRS	ST SUI	BDIVIS	ION				
	Car Capac			SECONI	CLASS			Fi	RST CL	\ss			Time Table No. 87	ls
Station Numbers				493	491	61			9	31	27	re from	Effective April 28, 1957	Telegraph Calls
Station	Sidings	Other Tracks		Daily	Daily	Dally Ex. Sunday			Daily Ex. Sat.	Daily	Daily	Distance St. Paul	STATIONS	Telegr
0							ļ		L 9.00pm	L 9.10Pm	L 9.30Am		ST. PAUL	A
11		••••				L 7.45Am			9.50 _{Pm}			l	MINNEAPOLIS	S
	TRAI	NS B	ETWEE	N ST. PA	UL AND	LYNDA	LE JCT.	WILL					Y TERMINALS TIME TABLE.	
	Yard	 		L 8.30Pm					L 9.55pm	ı	L 10.07Am	12.17	1.60 LYNDALE JCT*	ΦU
A 24	W 80	35		8.47	7.16	s 8.23			s10.11	9.56	10.20	23.90	0.33	WA
<u></u>		<u></u>		8.48	7.17	A 8.25Am		<u></u>	10.12		10.21	24.23	ш< 	•••••
A 27	E 79	19		8.52	7 .21				f10.16	9.59	10.24	27.00	2.77 D	ON
A 32	W103	19		8.59	7.2 7				s10.23	10.03	10.29	31.37	6.99	MA
A 39	80	54		9.10	7.35				s10.35	10.10	10.35	38.36	DELANO*	DA
A 45 A 48	Contin- vous 287	23 26					• • • • • • • • •		s10.44 f10.49			45.06 47.83		MO WY
A 40	207								110.49			47.03	5.01 HOWARD LAKE.	
A 53	3 07	59							s11.00	· · · · · · · · · · · · · · · · · · ·		52.84		RD
A 59 A 65	148 168 7 9	155							s . s .2			59.15 64.94	COKATO 91 5.79 DASSEL 90 5.10 DARWIN 1	CT DS
A 70	79 47	86 19							s 1.21 f 1.29			70.04	5.10 DARWIN	DN
A 76	171 106	156		10.00	8.22				s11.37	10.40	s11.08	76.18	6.14 ₹	FD
A 84	160	53										83.86	7.68 GROVE CITY	G
A 84	307	93 81							s12.01Am s12.09			88.99	5.13 ATWATER	WR
A 97		33							f12.18			96.35	□≥KANDIYOHI	KD
			• • • • • • • • •							11.07	11.37	101.00	REWILLMAR JCT	
A102	Yard	1661		A 10.40Pm	A 9.00Am				A 12.30Am	A 11.10Pm	A 11.40Am	102.19	1.19	w
				2.10 41.54	2.00 45.00	.25 28.94			2.35 34.84	1.27 62.08	1.33 58.07		Time Over Subdivision Average Speed Per Hour	

Westward trains are superior to eastward trains of the same class.

CONDITIONAL STOPS

No. 27 stops at Wayzata to discharge passengers from Chicago and east and to pick up passengers destined Fargo and west where No. 27 is scheduled to stop.

				ION	٥			EAS'	TWARI) 3			
Time Table No. 87				Fil	RST CLA	ss				SECOND	CLASS		
Effective April 28, 1957	ce from	SIGNS	10	32	28			490	60	492	494		
STATIONS	Distance Willmar		Daily Ex. Monday	Daily	Daily			Daily	Dally Ex. Sunday	Dally	Dally		
ST. PAUL	102.19	ĸ	A 7.40Am	A 7.00Am	1	1							
MINNEAPOLIS	91.62	K	7.15Am	6.30Am				<u> </u>	A 4.45Pm		l		
TRAINS BETWEEN ST	. PAU	L AND	LYNDA	LE JCT.	WILL	E GOVE	RNED B	Y TWIN	CITY T	ERMINA	LS TIM	E TABLE	E
LYNDALE JCT	90.02	DNJW	A 6.50Am	A 6.20Am	A 9.15Pm			A 8.25Am	A 4.25Pm	A 6.25Pm	A 1.40Am		
11.73 WAYZATA	78.29	DNPR	1 6.25	6.02	8.54			8.06	s 4.01	6.06	1.21		
WAYZATA	77.96	PJ	6.22		8.53			8.05	L 3.56Pm	6.0 5	1.20		
2.77 Long Lake	75.19	DP	s 6.18	5.58	8.50			8.01		6.01	1.16		
MAPLE PLAIN	70.82	DP	s 6.10	5.53	8.45		• • • • • • • • • • • • • • • • • • • •	7. 54		5.54	1.09		
DELANO	63.83	DNPW	s 5.57	5.45	8.37		•••••	7.40		5.40	12. 55		
MONTROSE	57.13	DP	s 5.43					· 					
WAVERLY OF	54.36	DP	s 5.23										
5.01 HOWARD LAKE	49.35	DP	s 5.14	•••••						-;· ·· ····			
COKATO DASSEL S	43.04	DP	s 5.02	• • • • • • • • • • • • • • • • • • • •	·····	·····				•••••			
DASSEL	37.25	DPW	s 4.51					•••••				••••	• • • • • • • • • • • • • • • • • • • •
5.10 DARWIN	32.15	DP	s 4.41	5.07	7			4.50	• • • • • • • • • • • • • • • • • • • •	4.50	10.05		• • • • • • • • • • • • • • • • • • • •
LITCHFIELD*	26.01	DNPW	s 4.30	5.07	s 7.57			6.50		4.50	12.05Am		
GROVE CITY	18.33	DP	£ 4.11			1							
5.13 ATWATER	13.20	DP	1 4.03										
₹ KANDIYOHI	5.84	DP	s 3.53				· · · · · · · · · · · · · · · · · · ·						
MILLMAR JCT	1.19	UPX ORDNK BXWZ	L 3.40 _{Am}	L 4.40Am	L 7.25Pm			L 6.00Am		ь 4.00 _{Рт}	L 11.15Pm		
Time Over Subdivision Average Speed Per Hour		=	3.10 28.42	1.40 54.01	1.50 49.10			2.25 37.25	.29 24.95	2.25 37.25	2.25 37.25		

Westward trains are superior to eastward trains of the same class.

CONDITIONAL STOPS

No. 28 stops at Wayzata to discharge passengers from Fargo and west and to pick up passengers destined Chicago and east.

4	W	EST	WARD				SE	COND	SUBD	ivisio	N				
		ar acity		SECONI	CLASS				FIRST	CLASS				Time Table No. 87	<u> </u>
Station Numbers			(326) 329	495	493	491		31	27	185	51	9	e from	Effective April 28, 1957	aph Calls
Station	Sidings	Other Tracks	Daily Ex. Sunday	Daily	Daily	Daily		Daily	Daily	Daily Ex. Sunday	Daily Ex. Sunday	Daily Ex. Sunday	Distance Willmar	STATIONS	Telegraph
A102	Yard	1661		L 12.30Pm	L 8.40Am	L 1.30 Am		L . 2Pm	L 11.45An	L 5.20Am	1	L 12.45Am	ļ	H	w
A109	w37	19		12.45	8,55	1 . 45		11.18	11.52	s 5.32	A 1.35Am	12.54	0.47 6.60	SIOUX CITY LINE JCT.	к
A116	173	47 32		12.53 12.58	9.03 9.09	1.56 2.03		11.24	11.59 192 12.03 Pm	s 5.45 s 5.55		1.03 1.07	14.04 18.52	KERKHOVEN 4.48 MURDOCK	KH CK
A125	138	39		1.04	9.14	2.10	-	11.32	12.07	s 6.05		1.11	23.08	4.56 DE GRAFF	DG
A133	E356 W140	278		1.13	9.23	2.30		11.39	s12.16	A 6.20Am		s 1.27	30.59 31.37	7.51 ★ 0.78 WATERTOWN LINE JCT.	BN
A138	139	38		1.20	9.30	2.40		11.44	12.22			s 1.35	36.26	4.89	CF
A149	76	49		1.33	9.43	⁴⁹⁰ 2.58		11.53	12.32			s 1.50	46.48	CLONTARF	
A157	82	218		1.45	9.55	32-490 3.40		12.01Am	s12.43			s 2.22	54.33 55.33	Browns Valley Line Jct. 500 MORRIS*	MR
A166 A176	146 135	41 51		1 . 55 2.09	10.05	3.55 4.10		12.09 12.18	12.52 1.03			s 2.37 s 2.53	63.55 74. 01	DONNÉLLY	DY
A181	143	30		2.15	10.25	4.17		12.22	1.08			s 3.16	78.90	NORCROSS	RC
A187 A193	 150	19 64		2.23 2.30	10.33 10.40	4.25 4.32		12.27 12.31	1.14 1.19			3.24 s 3.32	85.37 90.40	CHARLESVILLE 5.03 TINTAH	QN
	••••	••••	L 9.40Pm	2.34	10.44	4.37			1.22			3.36	92.57 93.20	M. St. P. & S. S. M. Ry. Cross. 0.63 ABERDEEN LINE JCT	
A200	119	108	s 9.40Pm	2.40	10.50	4.45		12.38	1.27			f 3.43		XCAMPBELL	СВ
A207		21	110.05	2.50	11.00	4.55		12.45	1.35			f 3.55	104.78	下 7.16 DORAN	ОР
A214	Yard	1143	A 10.30Pm	A 3.05Pm	A 1.15Am	A 5.10Am		A 12.53Am	A 1.45Pm			A 4.10Am		BRECKENRIDGE	BR
			.50 23.35	2.35 43.61	2.35 43. 61	3.40 30.73		1,41 66,92	2.00 56.33	1.00 30.59	.05 5.64	3.25 32.97		Time Over Subdivision Average Speed Per Hour	

Westward trains are superior to eastward trains of the same class, except as follows: Nos. 330, 490, 492 and 494 are superior to No. 329 between Campbell and Aberdeen Line Jct.

				SECO	ND SU	BDIVI	SION				EAS	TWARI	5
Time Table No. 87					FII	RST CLA	SS				SECONE	CLASS	
Effective April 28, 1957	Distance from Breckenridge	SIGNS	10	32	186	28	52			490	(325) 330	492	494
STATIONS	Distanc Brecke		Daily Ex. Monday	Daily	Daily Ex. Sunday	Daily	Daily Ex. Sunday			Daily	Daily Ex. Sunday	Daily	Dally
الله (WILLMAR★)	112.66	BDNWR OKXZ	A 3.25Am	A 4.37Am	A 7.00Pm	A 7.18pm	A 11.59Pm			A 4.25Am		A 12.40Pm	A 8.45Pm
SIOUX CITY LINE JCT.	112.19	UPX					ъ 11.55Pm		• • • • • • • • • • • • • • • • • • • •				
GF (PENNOCK	106.06	DP	f 3.12	4.29	s 6.45	7.08			• • • • • • • • • • • • • • • • • • • •	4.10		12.22	8.24
KERKHÖVEN	98.62	DP	f 3.02	4.21	s 6.32	7.00			• • • • • • • • • • • • • • • • • • • •	3.58	•••••	12.10	8.12
MURDOCK	94.14	DP	f 2.54	4.17	s 6.23	6.56			• • • • • • • • • • • • • • • • • • • •	3.52		12.03 Pm	8.05
4.56 DE GRAFF 7.51	89.58	DP DNIP	f 2.46	4.13	s 6.14	6.52				3.46		11.48	7.57
BENSON ★	82.07	RKXW	s 2.35	4.05	L 6.00Pm	s 6.44			••••••	3.35		11.38	7.45
WATERTOWN LINE JCT.	81,29	PYJ							••••••	• • • • • • • • • •	•••••		
CLONTARF	76.40	DP	f 2.20	3.59		6.34			· · · · · · · · · · · · · · · · · · ·	3.25	·····	11.30	7.35
TOUR STATE OF THE	1	DNIP	f 2.07	3.49		6.25			•••••	3.10	•••••	11.15	7.20
Browns Valley Line Jct.	58.33 57.33	PYJ DNW KXIP	s 1 .55	491 3.40		s 6.15			•••••	491 2.52	•••••	11.00	7.05
II 822 J-		DP	f 1.34	3.32		6.04				2.37		10.48	6.52
DONNELLY 9 10.46 HERMAN 4.89 NORCROSS. 4	38.65	DNP	s 1.20	3.21		5.54				2.08		10.33	6.37
NORCROSS	33.76	DNPW	s .	3.16		5.50				2.00		10.25	6.30
CHARLESVILLE	27.29	P	1.02	3.10		5.44				1.50		10.13	6.20
5.03 TINTAH	22.26	DP	f12.54	3.05		5.39				1.43		10.05	6.10
M. St. P. & S. S. M. Ry. Cross 0.63	20.09	١											
ABERDEEN LINE JCT	19.46	Lq	12.49			5.36			• • • • • • • • • • • • • • • • • • • •	1.37	A 8.20Am	9.57	6.02
## 4.42 CAMPBELL★ 7.16 DORAN	15.04	DNIPR	f12.44	2.58		5.32				1.30	s 8.05	9.50	5.55
	7.88	DP	f12.35	2.51		5.24				1.15	s 7.40	9.35	5.45
BRECKENRIDGE	1.58	PIX RDNWB YOKXZ	L 12.25Am	L 2.42Am		L 5.15Pm			••••••	L I.00Am	L 7.30 _{Am}	L 9.20Am	ь 5.30 _{Рт}
Time Over Subdivision Average Speed Per Hour			3.00 37.55	1.55 58.78	1.00 30.59	2.03 54.95	.04 7.05			3.25 32.97	.50 23.35	3.20 33.80	3.1 <i>5</i> 34.66

Westward trains are superior to eastward trains of the same class, except as follows: Nos. 330, 490, 492 and 494 are superior to No. 329 between Campbell and Aberdeen Line Jct.

W	ES7	TWARD	,			T	HIR	D SUBDIVISION					E	ASTW	ARD
		SECONE	CLASS	FI	RST CLA	ss		Time Table No. 87				FII	RST CLA	ss	SECOND CLASS
<u> </u>		437	405	7	11	3	e from	Effective April 28, 1957		e from	SIGNS	8	12	4	438
Sidings	Other Tracks	Daily	Daily	Daily	Daily	Daily	Distanc	STATIONS	Telegr	Distanc St. Clo		Daily	Daily	Daily	Daily
				L 8.55₽m	ь 4.30pm	L 8.15Am		ST. PAUL	. A	74.82	К	A 7.30Am	A 1.00Pm	A 10.40Pm	
<u>l</u>				9.30 pm	4.55 P m	8.45Am		MINNEAPOLIS	. s	64.25	K	7.05Am	12.40pm	10.15Pm	
	TR	AINS BE	TWEEN	ST. PAL	L AND	LYNDAL	E JO	T. BE GOVERNED BY	TWI	N CI.	TY TER	MINALS	TIME T	ABLE.	
Yard		L 8.40Pm	ь 7.30Am	L 9.33Pm	ь 4.58 Р т	L 8.48Am		1.60 LYNDALE JCT★.)	UD	62,65	P RDNWXJ	A 6.55Am	A 12.31Pm	A 10.05Pm	A 3.00Am
•••••	• • • • •							.M. W. R. R. CROSSING.		61.89	. 1				
 87	44	8.50	7.40	r 9.40	5.05	8.54		3.41ROBBINSDALE	RB	57.65	DP	f 6.45	12.23	9.57	2.47
							6.34	.M.St.P.&S.S.M.Ry.Cross.	불	56.31	IP				
92	72	9.00	7. 50	f 9.50	5.12	9.00	11.48			51.17	DP	r 6.37	12.16	9.50	2.35
99	19	9,12	8.05	f 9.59	5.22	9.09	20.49	9.01 ROGERS	RO	42.16	DP	f 6.27	12.06 PM	9.40	2.20
93	29	9.30	8.15	f10.07	5.29	9.16	26.75	ALBERTVILLE	SA ا د	35.90	DP	f 6.20	11.59	9.30	2.07
79	43	9.43	8.28	f10.16	5.37	9.25	35.18	Montigello	E MC	27.47	DNPW	f 6.11	11.51	9.19	1.52
29	 	9.55	8.40	10.23	5.44	9.33	42.75	ENFIELD	<u> </u>	. 19.90	P	6.03	11.44	9.09	1.37
	34	9.59	8.44	10.26	5.46	9.36	44.95		-	. 17.70	P	6.00	11.42	9.06	1.32
80	13	10.07	8.52	f10.32	5.51	9.41	49.98	CLEARWATER	cw	12.67	DP	f 5.55	11.37	9.01	1.20
Yard	1501	A 10.30Pm	A 9.20Am	A 10.50Pm	A 6.06Pm	A 9.59Am	62,65		DX	<u> </u>	TWXYZ	L 5.40Am	L 11.23 AM	L 8.45 PM	L 12.45Am
	T	RAINS B	ETWEEN	ST. CL	OUD AN	D RICE	JCT	. WILL BE GOVERNED	BY	SIXT	H SUBD	IVISION	SCHED	ULES.	
		1.50 34.16	1.50 34.17	1.17 48.81	1.08 55,28	1.11 52.94		Time Over Subdivision Average Speed Per Hour				1.15 50,12	1.08 52.28	1.20 46.88	2.15 27.84
	Yard 87 92 99 93 79 29	Car Capacity B	Car Capacity SECONII 437 437 Daily TRAINS BE Yard L 8.40Pm 87 44 8.50 92 72 9.00 99 19 9.12 93 29 9.30 79 43 9.43 29 9.55 34 9.59 80 13 10.07 Yard 1501 A 10.30Pm TRAINS B	Capacity	SECOND CLASS FIFT	SECOND CLASS FIRST CLA	SECOND CLASS FIRST CLASS	SECOND CLASS FIRST CLASS Figure Figure	SECOND CLASS FIRST CLASS Time Table No. 87	SECOND CLASS FIRST CLASS Time Table No. 87 Time Table No.	SECOND CLASS FIRST CLASS Time Table No. 87 First Class First Class Time Table No. 87 First Class First Cla	SECOND CLASS	SECOND CLASS FIRST CLASS FIRST CLASS SECOND Class	SECOND CLASS	SECOND CLASS FIRST CLASS Time Table No. 87 First Class Signs Signs

Westward trains are superior to eastward trains of the same class.

CONDITIONAL STOPS

Nos. 7 and 8 will stop at Robbinsdale, Osseo, Rogers, Albertville, Monticello and Clearwater for revenue passengers only.

SEE ADDITIONAL SPECIAL INSTRUCTIONS PAGES 15 THROUGH 23.

w	EST	WA	RD				F	OURTH SUBDIVISION					E	ASTW	ARD
	Cap	ar acity			SECON	D CLASS		Time Table No. 87	.5			SECONI	CLASS		
N CHIP P					335 #		Effective April 28, 1957	ıph Calls	• from Valley	SIGNS	336	į			
Station Numbers	Sidings	Other Tracks				Mon., Wed., Thur., Fri.	Distanc Morris	STATIONS	Telegraph	Distance from Browns Valley		Mon., Wed., Thur., Fri.			
A1 57						L 7.30Am			MR	47.37	RWDB NXKI	A 4.00Pm			
TRA	INS	BET	WEEN B	ROWNS	VALLE	/ LINE J	ICT. A	AND MORRIS WILL BE GOV	ERN	ED B	Y SECOI	ND SUBI	IVISION	SCHED	ULES.
		 .				L 7.35Am	1.01	BROWNS VALLEY LINE JCT		46.36	XPYJ	A 3.50Pm			
D 6	 	31				s 8.05	8.22	ALBÉRTA	AB	39.15	D	s 3.30			
D12	 	57			 	s 8.35	14.27	CHOKIO	ко	33. 10	D	s 3.05			
D18		21				s 8.55	20.17	JOHŇŠON	j	27.20	D	s 2.30			
							26.76	. C. M. ST. P. & P. RY. CROSSING.		20.61	•••••				
D25		50				s 9.25	27.21	0.45 GRACEVILLE	GB	20.16	D	s 2.00			
D31	ļ	56	 			s 9.45	33.09	BARRY	ВХ	14.28	D	s 1.30			
D39	ļ	39	 			s10.25	40.44	BEARDSLEY	BY	6.93	D	s 1.00			
D45		57				A 11.00Am	47.37	BROWNS VALLEY	BV		RDXY	L 12.30Pm			
						3.30 13.53		Time Over Subdivision Average Speed Per Hour				3.30 13.53			
				<u> </u>	Wes	stward tra	ains ar	e superior to eastward trains o	f the	same	class.				

w	ES7	WARI)			FIFTH SUBDIVIS	SIO	N				EAS	TWAR	D 7
2		SECON	D CLASS			Time Table No. 87	_ <u></u>						SECON	D CLASS
Station Numbers	lty of		61		Distonce from Hutchinson Jct.	Effective April 28, 1957	aph Calls	Distance from Hutchinson	SIGNS				60	
Station	Capacity Tracks		Daily Ex. Sat. and Sunday		Diston Hutchir	STATIONS	Telegr	Distance Hotchir					Daily Ex. Sot. and Sunday	
			L 8.25Am	 		HUTCHINSON JCT	ļ	44.09	PJ		 		A 3.56Pm	
В 3	12		s 8.35	 	3.11	CRYSTAL BAY		40.98					s 3.46	
B 6	<i>7</i> 9		s 8.45	 	6.27	SPRING PARK	PK	37.82	D				s 3.20	• • • • • • • • •
8 8	31		s 8.55	 	8.1 <i>7</i>	1.90 MOUND 4.57	MU	35.92	D				s 3.10	
B13	35		s 9.08	 	12.74	ST. BONIFACIUS	NI	31.35	D				s 2.55	
817	13		s 9.18	 	16.92		 	27.17					s 2.45	
821	17		s 9.28	 	20.55	3.63 MAYER	KY	23.54	D				s 2.35	•••••
B24	26		s 9.40	 	24.35	3.80 NEW GERMANY 3.68	NG	19.74	D				s 2.25	
B28	46		s10.00	 	28.03	LESTER PRAIRIE	PR	16.06	D		[s 2.10	
B36	23		s10.30	 	35.86	SILVER LAKE	 -	8.23					s 1.50	
B44	88		A 11.00Am	 	44.09	HUTCHINSON	но		RDWY	······	<u></u>		L 1.30 _{Pm}	
			2.35 17.06			Time Over Subdivision Average Speed Per Hour							2.26 18.11	

Westward trains are superior to eastward trains of the same class. SEE ADDITIONAL SPECIAL INSTRUCTIONS PAGES 15 THROUGH 23.

V	VES	TW	ARD				SI	XTI	H SUBDIVISIO	N					E	ASTW	ARD
s's	Cap	ar acity	SECOND CLASS		FIRST	CLASS			Time Table	1				FIRST	CLASS		SECOND CLASS
Station Numbers			427	29	7	11	3	ce from	No. 87 Effective April 28, 1957	aph Calls	se from	SIGNS	8	12	30	4	428
Station	Sidings	Other Tracks	Dally	Daily Ex. Sunday	Daily	Daily	Daily	Distance f St. Cloud	STATIONS	Telegraph	Distance Willmar		Daily	Daily	Daily Ex. Sunday	Daily	Dally
75	Yard	1501	L 6.00Am	L 11.30Pm	L 11.00pm	L 6.08Pm	L 10.05Am		ST. CLOUD★	DX	56.41	BDNIKO RTWXYZ	A 5.35Am	A 11.22Am	A 7.35Pm	A 8.40pm	A 12.35Pm
			6.05	A 11.33Pm	A 11.02Pm	A 6.10pm	A 10.07Am	0.73	RICE JCT	 	55.68	IJPX 2	L 5.32Am	L II.20Am	L 7.30Pm	L 8.37Pm	12.30
-10	57	32	6.25					10.33			46.08	P					12.10
I-15	110	73	6.35					15.14	COLD SPRING	CG	41.27	DP					12.01Pm
1-20	49	35	6.45					19.63	RICHMOND	RI	36.78	DP					11.53
1-26		35	7.00					25.84		XN	30.57	DP					11.40
1-31	51	36	7.15					31.27		SY	25.14	DPWX					11.30
								32.03	RY. CROSSING		24.38	IX					
1-37		40	7.28					36.72			19.69	• Р					11.17
1-43	50	38	7.4 0					43.33	NEW LONDON	ND	13.08	DP					11.05
1-48	100	29	7. 50					47.64		CR	8.77	DP					10.55
<u></u>			A 8.10Am					56.41	WILLMAR JCT			IJPX					L 10.30Am
			2.10 26.03	.03 14,60	.02 21.90	.02 21.90	.02 21.90		Time Over Subdivision Average Speed Per Hour				.03 14.60	.02 21.90	.05 8.76	.03 14.60	2,05 27,07

Westward trains are superior to eastward trains of the same class except as follows:
Nos. 4, 8, 12 and 30 are superior to Nos. 3, 7, 11 and 29 between Rice Junction
and St. Cloud Passenger Station.

8	WI	EST	WARD				SI	EVENTH SUBDIVISION					E	CASTW	ARD
E	Capa		SECONE	CLASS	FIRST	CLASS		Time Table No. 87				FIRST	CLASS	SECONI	CLASS
Station Numbers			419	417		51	ce fram or	Effective April 28, 1957	Telegraph Calls	Distance from Garretson	SIGNS	52		418	420
Station	Sidings	Other	Dally	Dally		Daily Ex. Sunday	Distance Willmar	STATIONS	Telegr	Distan		Daily Ex. Sunday		Dally	Daily
A-102				L 5.00Am		ь 1.30 A m			w	127.91	RDNWB KXOZ	A 11.59Pm			A 2.30Am
TRA	INS	BET	WEEN S	IOUX CI	TY LIN	E JUNCT	ION A	ND WILLMAR WILL BE GO	VER	NED B	Y SEC	ND SUE	BDIVISIO	ON SCHE	DULES
			L 5.35Pm	L 5.10 _{Am}		L 1.35Am	0.47	SIOUX CITY LINE JCT		127,43	IJPX	A 11.55Pm		A 5.10Pm	A 2.22Am
L 64	55	12	5.50	5.25		1 1.43	5.97	5.50 PRIAM:6.02		121.93	P	1 11.44		4.55	2,10
I- 70	50	32	6.03	5.40		в 1.54	11.99		RA	115.91	DP	s11.38		4.43	1.55
 							19.09	M. W. RY. CROSSING		108.81					
I- 77	116	47	6.15	5.55		s 2.08	19.55	CLARA CITY	CA	108.35	DP	s11.26		4.27	1.45
I- 83	61	38	6.25	6.05		s 2.20	25.48	5.93 MAYNARD	MY	102.42	DP	si1.14		4.15	1.33
I- 87		35	6.31	6.11		£ 2.25	29,21	3.73 ASBURY		98.69	P	111.07		4.07	1.25
"			0.51	0.11		1 2.25	33.15	C. M. ST. P. & P. RY. CROSSING		94.75					
I- 92	97	130	6.40	6.22		s 2.40	34.59	GRANITE FALLS	GX	93.31	DP	s11.00		3.57	1.15
I- 97	49	11	6.50	6.32		1 2.47	40,02	5.43 LORNE	 	87.88	Р	f10.35		3.46	1.05
								3.88							
	• • • • •	••••			• • • • • • • • • • • • • • • • • • • •		43.90	M. & ST. L. RY. CROSSING		84.00					
I-102	58	35	7.00	6.44	• • • • • • • • • • • • • • • • • • • •	s 2.59	44,22	HANLEY FALLS	HY	83.68	DP	s10.28		3.36	12.55
1-109	50	37	7.11	6.55	•••••	s 3.10	50.39	COTTONWOOD	C	77.51	DP	s10.05		3.25	12.45
I-116	•••••	35	7.23	7.10	• • • • • • • • • • • • • • • • • • • •	s 3.22	57.70	5.37	GV MD	70.20	DP	s 9.55 s 9.45		3.13	12.34
I-121	148	144	7.35	7.25	•••••	s 3.30	63.07	0.14	MD.	64.83	DNXP	s 9.45		3.03	12.25
		 .					63,21	C. & N. W. RY. CROSSING	ļ	64.69				 	
I-128	51	32	7. 52	7.40		s 3.55	69.76	6.55 LYND6.25	YD	58.14	DP	s 9.23		2.48	12.05Am
.1-134	50	38	8.07	7. 55		s 4.07	76.01	RUSŠELL	RS	51.89	DP	s 9.13	,	2.38	11.55
I-142		38	8.22	8.10		s 4.20	83.88	FLORENCE	F	44.02	DP	s 8.58		2.25	11.42
1-147	100	56	8.40	8.20		s 4.32	88.89	RUTHTON	RV	39.01	DP	s 8.40		2.15	11.33
I-155		37	8.55	8.35		s 4.47	96.73	7.84 HOLLAND	HD	31.17	DP	s 8.27		2.00	11.17
1-155	••••		0.55	0.55		3 7.71	105.22	8.49 C. R. I. & P. RY. CROSSING		22,68					
							105.24	C. ST. P. M. & O. RY. CROSSING		22.66					
					l		105.30	C. M. ST. P. & P. RY. CROSSING		22.60					
1-164	30	69	9.15	8.50	l	s 5.25	105.53	0.23 PIPESTONE	NE	22.37	DNP	s 8.13		1.45	11.00
								6.74				7.10			
I-170	120	35	9.28	9.05		s 5.38	112.27		l	15.63	P	s 7.48		1.30	10.45
I-175	50	108	9.40	9.13		s 5.48	116.88	7.70 SHERMAN	JA	11.02	DP	s 7.39		1.22 1.08	10.35 10.20
I-18 3 I-186	50 145	35 220	10.00 A 10.10 Pm	9.27 A 9.35Am		s 6.03 A 6.10Am	124.58 127.90	SHERMAN	FS JC	3.32	DP BDNP ORKXY	s 7.27 L 7.20 _{Pm}		1.08 L !.00Pm	1 410 I
			4.35 27.80	4.25 28.85		4.35 27,80		Time Over Subdivision Average Speed Per Hour				4.35 27.80		4.10 30.58	4.12 30.34

Westward trains are superior to eastward trains of the same class.

SEE ADDITIONAL SPECIAL INSTRUCTIONS PAGES 15 THROUGH 23.

WESTWARD EIGHTH SUBDIVISION EASTV											TWARI	9			
Ę	Cap	ar acity	SECOND	CLASS	FIRST	CLASS		Time Table No. 87	_			FIRST	CLASS	SECOND	CLASS
Station Numbers			419	417		161	Distance from Garretson	Effective April 28, 1957	Felegraph Calls	Distance from Sioux City	SIGNS	162		418	420
Static	Sidings	Other Tracks	Daily	Daily		Daily Ex. Sunday	Distar	STATIONS	Teleg	Distar		Daily Ex. Sunday		Daily	Dally
I-186	145	220	L 10.30Pm	L 9.35Am		L 6.20Am		GARRETSON	JC	94.87	BDNP ORKXY	A 7.00Pm		A 1.00Pm	а 9.30 _{Рт}
IA-7	49	30	10.50	9.50		f 6.32	6.21	6.21 BOOGE		88.66	P	1 6.47		12.45	9.10
	••••	••••					10.65	.C. ST. P. M. & O. RY. CROS'G.		84.22					
IA-17	100	31	11.10	10.10		s 6.54	17.33	0.38 I. C. RY. CROSSING	HS	77.54 77.16	DP	s 6.25		12.25	8.45
IA-23	100	43	11.23	10.23		s 7.07	23.75	6.04 LESTER		71.12	P	s 6.12		12.12Pm	8.32
							23.97	.C. R. I. & P. RY. CROSSING.		70.90					
IA-30	101	34	11.38	10.35		s 7.21	30.65	6.68 ALVORD	AD	64,22	DP	s 5.58		11.59	8.20
IA-36	50	31	11.50	10.45		s 7.33	36.34	DOON	DO	58.53	DP	s 5.46		11.50	8.05
IA-45 IA-52	100	19 72	12.05 A m	11.01 11.20		f 7.50	45.30 52.88	7.58SIOUX CENTER		49.57 41.99	P DNP	s 5.29 s 5.13		11.33 11.20	7.52 7.40
IA-61		17	12.32	11.35		s 8.21	60.92	8.04 MAURICE	-	33.95	P	s 4.57		10.50	7.20
IA-66	41	29	12.40	11.47		s 8.32	66.06	5,14 STRUBLE	SB	28.81	DP	s 4.47		10.38	7.10
IA-73			12.58	12.01Pm		f 8.47	73.45	7.39WEST LeMARS		21.41	P	1 4.32		10.25	6.55
IA-78	43	51	1.06	12.11		s 8.58	78.60	5.15 MERRILL	 	16.27	P	s 4.21		10.15	6.45
	•••••	••••					84.06	WREN TOWER	GS	10.81	DNIP				
IA-85	51	30	1.18	12.25		s 9.13	85.42	1.36 HINTON 6.56	н	9.45	DP	s 4.07		10.00	6.30
iA-97	Yard	••••	 A. 1.40Am	A 12.45Pm		A 9.30 _{Am}	91.98 94.87	I. C. RY. CROSSING 2.89 sioux city	sx	2.89	M BDNKO RTWXZ	 ъ 3.50 _{Рт}		 161 L 9.40 Am	 L 6.10Рт
			3.10 29.96	3.10 29.96		3.10 29.96		Time Over Subdivision Average Speed Per Hour				3.10 29.96		3.20 28.46	3,20 28,46

Westward trains are superior to eastward trains of the same class. SEE ADDITIONAL SPECIAL INSTRUCTIONS PAGES 15 THROUGH 23.

10	10 WESTWARD NINTH SUBDIVISION												EASTWARD		
S S S S S S S S S S S S S S S S S S S		ar acity	SEC	OND CL	.ASS	FIRST		Time Table No. 87	Colls			FIRST		OND CL	ASS
Station Numbers	-		No. 37)	317	579	51	Distance from Garretson	Effective April 28, 1957		on from	SIGNS	52	(C. & N. W. No. 38) 294	318	580
Staffo	Sidings	Other Tracks	Daily Ex. Sunday	Dally Ex. Sunday	Daily	Daily Ex. Sunday	Distan	STATIONS	Telegraph	Distance Yankton	<u> </u>	Daily Ex. Sunday	Daily Ex. Sunday	Daily Ex. Sunday	Daily
I-186	Yard	256			L 12.01Am	L 6.30Am		GARRETSON	JC	81,26	BKDN ORXPY	A 7.02Pm			A 4.40Pm
1-194	 	37			s12.20	s 6.44	8.26	corson	 	73.00	P	s 6.48		 	s 4.20
		 					14.45	.C. ST. P. M. & O. RY. CROS'G.	ļ	66.81					
		 -					17.97	I. C. RY. CROSSING	ļ	63.29	x .		,		
<u> </u>		•••••			12.45	7.00	18.14	SIOUX FALLS JCT		63.12	JP	6.31			4.02
1-205	39	488		L 7.40Am	A 12.50Am	A 7.02Am	18.40	SIOUX FALLS	su	62.86	RDNXW OKBP	L 6.30 _{Pm}		A 5.40Pm	L 4.00 _{Pm}
		 					18.59	.C. M. ST. P. & P. RY. CROS'G.	ļ,	62.67					
 		 					18.80	.C. R. I. & P. RY. CROSSING.	 	62.46					
 	 	 		 			19.13	14th STREET YARD	ļ	62.13	х				
1-215	•••••	23		s 8.10			29.32	TEA		51.94				s 5.10	
1-222	••••	50		.s 8.35			36.01	LENNOX	ох	45.25	D			s 4.45	
		 -					36.22	.C. M. ST. P. & P. RY. CROS'G.	ļ	45.04			•••••		
1-231	•••••	36		s 9.05			44.62	DAVIS	D	36.64	D		•••••	s 4.00	
	•••••	••••					48.16	C. & N. W. RY. CROSSING	 	33.10	1				
1-238	•••••	35		s 9.30			52.02	VIBORG	VB	29.24	D			s 3.20	
1-245		34		s10.00			59.40	7.38 IRENE	RN	21.86	D			s 2.50	
1-255		22		s10.30			68.58	9.18 ••••••••••••••••••••••••••••••••••••	vo	12.68	D			s 2.20	
	•••••	• • • • •	L 7.02Am	10.32			69.08			12.18	RJ		A 9.28 _{Am}	2.10	
1-260	••••	18	s 7.20	s10.50			74.42	MISSION HILL		6.84	•••••		s 9.15	s 1.55	
 			A 7.35Am	11.05			79.77	5,35 C. & N. W. JCT		1.49	RJ.		L 9.03Am	1.40	
	•••••	•••••					79.86	.C. M. ST. P. & P. RY. CROS'G.		1.40	м				
	•••••	•••••					80.38	.C. M. ST. P. & P. RY. CROS'G.		.88	м		,		
[·····	•••••	•••••					80.68	C. & N. W. RY. CROSSING	•••••	.58	M RDWX				
I-267	Yard	172		A 1.15Am			81.26	YANKTON	YK		KB			L 1.30Pm	
			.33 19.43	3,35 17,54	.49 22.53	.32 34.50		Time Over Subdivision Average Speed Per Hour				.32 34,50	.25 25.66	4.10 15.08	.40 27.60
<u> </u> '															

Westward trains are superior to eastward trains of the same class, except No. 580 is superior to No. 579 Sioux Falls to Garretson.

WESTWARD TENTH SUBDIVISION EASTWARD 11																
	С	ar		SEC	OND CL	.ASS			Time Table No. 87					SECOND	CLASS	
Station Numbers	Cap	acity						from wn	Effective April 28, 1957	oh Calls	from IIs	SIGNS	200			·
affon 7	Siding	Other Tracks					265 Tues, Thur.,	Distance from Watertown	STATIONS	Telegraph	Distance from Sioux Falis		266 Mon., Wed., Friday			
		0=					Saturday	Δ>		=			Friday			
C-92	Yard	282			<u> </u>	<u> </u>	L_7.00Am		WATERTOWN	WN		BDNOR XWK	A 1.00Pm			
1	RAI	NS E	ETWEEN	W. &	S. F. JC	T. AND	WATER	TOWN		BY	ELEV	ENTH	SUBDIV	ISION S	CHEDUL	ES.
					• • • • • • • • •		l 7.05Am	1.27	1,27 W. & S. F. JCT. 2.97		102.39	RJX	A 12.55Pm			
WS-4		9					# 7.13	4.31	FÖLEY		99.42		f12.45		.	
WS-11		29					s 7.30	10.83	THOMAS	••••	92.83		s12.25			• • • • • • • • • • • • • • • • • • • •
WS-18		32					s 7.50	18.09	7.26 HAYTI. 5.32	н	85.57	D	s12.05Pm			
WS-23		27					s 8.15	23.41	LAKE NORDEN	NR	80.25	D	s11.45		· · · · · • · · · ·	
WS-30		29					s 8.35	30.03	6,62 BADGER	В	73.63	D	s11.20			•••••
							• • • • • • • • • • • • • • • • • • • •	39.21	.C. & N. W. RY. CROSSING.		64.45	, w				• • • • • • • • • • • • • • • • • • • •
WS-39		34					s 9.20	39.40	ARLINGTON	AR	64.26	D	s10.45			
		••••						40.37	.C. & N. W. RY. CROSSING.		63.29	<u> </u>				
WS-45		12					f 9.35	45.05	AHŅBERG		58.61		#10.20			
WS-49		26					s10.00	49.23	4.18 SINAI	SN	54,43	D	s10.00			• • • • • • • • • • • • • • • • • • • •
WS-55		48					s10.20	55,25		NU	48.41	D	s 9.25			
WS-61		28			• • • • • • • • • •		s10.35	61.01	RUTLAND, S. D	RU	42.65	D	s 9.00			•••••
 								67.27	.C. M. ST. P. & P. RY. CROS		36.39					
WS-67		26					s11.00	67.28	0.01 WENTWORTH 7.62	WH	36.38	D	s 8.35		, ,	• • • • • • • • • • • • • • • • • • • •
WS-75		42			• • • • • • • • •		s11.25	74.90	CHESTER	СН	28.76	D	s 8.05			• • • • • • • • • • • • • • • • • • • •
WS-82		49					s11.55	82.51	7.61 COLTON 5.82	со	21.15	D	s 7.30			• • • • • • • • • • • • • • • • • • • •
WS-88	• • • • •	15					s 12.15Pm	88.33	LŸÖNS	••••	15.33	•••••	s 7.05	••••••		• • • • • • • • •
WS-94		14					s12.35	93.92	cROOKS		9.74		s 6.40			
WS-98		8						97.71	QUINCY 2.84	••••	5.95					• • • • • • • • • • • • • • • • • • • •
					•••	l	A 1.00рт	100.55	WEST JCT. (C. M. St. P. & P.)		3.11		L 6.15Am			
		T	RAINS B	ETWEEN	WEST	JCT. AN	ID EAST	JCT.	WILL BE GOVERNED	BY	C. M.	St. P	. & P. T	IME TA	BLE	
					• • • • • • • • • •		ւ I.05թա	102.32	1.77 EAST JCT. (C. M. St. P. & P.) 1.08		1.34		A 6.10Am			•••••
				••••••	• • • • • • • • • • • • • • • • • • • •		A 1.10рт	103.40	SIOUX FÄLLS JCT		.26	JP	L 6.05Am			
1	rai	NS I	BETWEE	N SIOUX	(FALLS	JCT. A	ND SIOU	X FA	LLS WILL BE GOVERN	ED	BY N	INTH	SUBDIV	ISION S	CHEDUL	ES.
1-205	39	488					A 1.15Pm	103.66	SIOUX FALLS	SU		DNRB OXWK	L 6.00Am			
	_						6.05 16.79		Time Over Subdivision Average Speed Per Hour				6.50 14.94			

Westward trains are superior to eastward trains of the same class.

SEE ADDITIONAL SPECIAL INSTRUCTIONS PAGES 15 THROUGH 23.

===	Siding Cabo	city	THIRD 529	CLASS	FIRST	CLASS				· · ·						
===	Siding	- Si	529	THIRD CLASS FIRST C		CLASS		Time Table No. 87	_			FIRST	CLASS	TH	IRD CLA	\SS
===	Siding	농윤	JEJ	531		185	Distance from Benson	Effective April 28, 1957	aph Calls	Distance from Huron	SIGNS	186		530	532	
4100		Other Tracks	Dally Ex. Sunday	Daily Ex. Sunday		Daily Ex. Sunday	Distance	STATIONS	Telegraph	Distan Hvron		Dally Ex. Sunday		Dally Ex. Sunday	Daily Ex. Sunday	
A133 .						L 6.25Am		BENSON★	BN	161.83	RDNW BXKI	A 5.55Pm				
TR	RAIN	IS B	ETWEEN	WATER	RTOWN	LINE JC	T. AN	D BENSON WILL BE GO	OVI	RNE	BY	SECOND	SUBDIV	VISION S	SCHEDU	LES.
			L 8.00Am			L 6.28 _{Am}	0.78	WATERTOWN LINE JCT		161.05	JXPY	A 5.53Pm		A 8.05Pm		
C 9 .		34	s 8.30			s 6.42	7.88	7.10 DANVERS	DR	153.95	D	s 5.40		f 7.50		
C 16 .		33	s 9.00			s 6.56	15,83	HOLLOWAY	ow	146.00	D	s 5.27		f 7.30		
C 22	45	167	sil.30			s 7.10	21.96	APPLETON	ΑU	1 39.87°	DNX	s 5.15		s 7.15		
							22.73	.C. M. ST. P. & P. RY. CROS		139.10	ı					
C 30 .		34	s12.15Pm			s 7.26	30,65	7.92 LOUISBURG	BG	131.18	D	s 4.57		f 6.45		-
C 37	44	26	s12.15m			s 7.38	37.14	6.49 BELLINGHAM	BA	124.69	D	s 4.45		f 6.30		
C 46 .	~~	35	s 1.30			s 7.53	46.34	9.20 NASSAU	NA NA	115.49	D	s 4.43		£ 6.10	•••••	
C 52	45	26	s 2.05			s 8.05	51.82	5.48 ALBEE	\~^	110.01		s 4.32 s 4.22	• • • • • • • • • •	f 5.55	• • • • • • • • •	
C 58 .		36	s 2.45			s 8.20	57.98	6.16 LA BOLT	ВО	103.85	D	s 4.12	• • • • • • • • • •	f 5.40	•••••	••••••
<u>- 38 .</u>						8 0.20	37.76		==	103.03	<u> </u>			1 3.40		
C 66 .	•••••	15	s 4.00		• • • • • • • • •	в 8.37	65.57	STOCKHOLM	SK	96.26	D	s 4.00	• • • • • • • •	f 5.20		• • • • • • • • • • • •
C 73	43	31	s 5.00			s 8.53	72.82	SOUTH SHORE	VR	89.01	D	s 3.48		1 5.00		
C 86	• • • • •	35	f 5.30			f 9.15	86.08	RAUVILLE		75.75		f 3.26		f 4.30		
· · · · · · · · ·	• • • • •	•••••					91.49	.M. & ST. L. RY. CROSSING.	••••	70.34						• • • • • • • • •
							91.80	.c. & N. W. RY. CROSSING.	l	70.03						
	Yard	204		r 2.20a		A 9.25		0.19 WATERTOWN	WN	İ	RDNOX BWK	i 3.15 A 3.05	• • • • • • • • • • • • • • • • • • • •	t. 4.15pm	1 200	
C 92	ıara	324	A 5.50pm	ъ 3.30Am 3.35		L 9.35	91,99	1,27	WN	69.84	RJX	A 3.05 3.02	• • • • • • • • •	L 4.15Pm	A 1.30 _{Pm}	
C102	• • • • •	34		3.35 s 3.55		9.39 s 9.55	93.26	W. & S. F. JCT 8.63 GROVER		68.57 59.94	D	5 2.47	• • • • • • • • • • • • • • • • • • • •		s 1.00	
C102 .	• • • • •	37	• • • • • • • • • • • • • • • • • • • •	s 3.33 s 4.15		s 9.55 s 10.07	101.89	6.35 HAZEL	z	53.59	D	s 2.47			s 1.00 s12.35	
- 107			-,	8 4.13		\$10.07	100.24	6.92		33.39		8 2.33	******		814.33	*********
	•						115,16	.C. M. ST. P. & P. RY. CROS	 	46.67	ļ	 	• • • • • • • • • • • • • • • • • • • •			
C116 .	• • • • •	41		s 4.40		s10.20	11 <i>5</i> .1 <i>7</i>	VIËNNA	VA	46.66	D	s 2.20			s12.10 _{Pm}	
C124 .	•••••	35		s 5.05		s10.34	124.05	WILLOW LAKE	wĸ	37.7 8	D	s 2.03		.	s11.40	
C130 .	• • • • •	5		f 5.20		s10.47	130.33		 	31,50		f 1.49			fil.15	
C136 .	••••	35		s 5.35		s10.58	136.19	BANCROFT	BF	25.64	D	s 1.38			s 11.00	
C141 .		35		s 5.50		sl1.07	140.64	4.45 OSCEOLA	sc	21.19	D	s 1.28			s10.30	
C149 .	• • • • •	36		s 6.10	l	s11.22	148,36	7.72 YALE	YA	13.47	D	s 1.12		I	s10.00	
							161.19	12.83 .C. & N. W. RY, CROSSING.		0.64	1					
C162	Yard	202		A 7.00Am	.	A 11.45Am	161.83	0.64 HURON	HU		BDR WYX	L 12.45Pm		.	L 9.15Am	
		====	9.50 9.27	3.30 19.95		5,17		Time Over Subdivision	F			5.08 31.37		3.50 23.79	4.15 16.43	
			9.27	19.95]	30.48		Average Speed Per Hour		[<u> </u>	31.37		23,79	16.43	

Westward trains are superior to eastward trains of the same class. SEE ADDITIONAL SPECIAL INSTRUCTIONS PAGES 15 THROUGH 23.

WARD 13	EAST		TWELFTH SUBDIVISION							RD	`WA	ES1	W	
D CLASS	SECON				_	Time Table No. 87		,	CLASS	SECONI		ar acity		Ę
		326	SIGNS	Distance from Aberdeen	Telegraph Calls	Effective April 28, 1957	e from ine Jet.	325						Station Numbers
		Daily Ex. Sunday		Distanc	Telegr	STATIONS	Distance Soo. Line	Daliy Ex. Sunda y			-	Other Tracks	Sidings	Staffor
	1	A 9.40Pm	- 9t			ABERDEEN LINE JCT		L 8.20Am				••••	••••	
WE TABLE.		L 9.37Pm	P. &	<u></u> М. ST	BY I	T. WILL BE GOVERNED	LINE	A 8.25Am	JCT. A	N G. N	BETWE	36 INS	TRA	E45
	1	7	1	<u> </u>		29.50			1		<u></u>	1		
••••••	1	A 8.16Pm f 8.06		91.49 86.57		SOO. LINE JCT	4.92	L 9.42Am				23	• • • • •	E70
				80.37		4.80	4.72							-50
		s 7.54	D	81.77	DK	LIDGERWOOD	9.72	s10.10				54	• • • • •	E74
••••••		s 7.35	D	75.62	GO	GENESEO5,15 CAYUGA	15.87	s10.25				32	• • • • •	E80
••••••		s 7.20	D	70.47	CU	6.13	21.02	s10.39				34		E86
••••••		s 7.05	RDXKB YJX	64.34	. RJ	RUTLAND, N. D	27.15 27.42	\$11.UD	[35	50	E92
			13%	64.07	•••••	9.09	27.42						••••	
		s 6.26	D	54.98	. WB		36.51	s11.33				36	• • • •	F9
•••••		s 6.08	D	48.40	KS	KIDDER	43.09	s11.53				35	• • • • •	F16
••••••				44.87		M. ST. P. & P. RY. CROSSING. 5.17	46.62					• • • • •	• • • • •	•••••
••••••		s 5.44		39.70		WEST BRITTON	51.79	s12.13Pm				9	• • • • •	F24
		s 5.30	D	34.15	. MN	AMHERST	57.34	s12.31			· · · · · · · · · · · · · · · · · · ·	35	••••	F30
		s 5.12	D	27.78	. QC	CLAREMONT	63.71	s12.49		 		34		F36
		s 4.54		22.42		5.36 HUFFTON	69.07	f 1.05				21		F42
		s 4.41	D	16.95	UN	5,47 PUTNEY	74.54	s 1.21				24	• • • • •	F47
		s 4.32		13.05		TACOMÄ PARK 3.77	78.44	f 1.31				7	• • • • •	F51
<u></u>	<u></u>	1 4.23		9.28		PLÄNA	82.21	1 1.41	<u></u>	<u></u>		23	•••••	F55
			1	0.64		M. ST. P. & P. RY. CROSSING.	90.85							
			1	0.62		. c. & N. w. RY. crossing	90.87	[
		L 4.00Pm	RDN XYK	ļ	FN	0.62 ABERDEEN	91,49	A 2.15Pm				175	Yard	F64
		4.16 21.44				Time Over Subdivision Average Speed Per Hour		4.33 20.10						
		21.44			l	Average Speed Per Hour	<u> </u>	20.10						

Westward trains are superior to eastward trains of the same class.

SEE ADDITIONAL SPECIAL INSTRUCTIONS PAGES 15 THROUGH 23.

14	N	ÆS	TWAR	D .			THIRTEENTH SUBDIVISION						EASTWARD				
_		ar acity		SECONI	CLASS			Time Table No. 87	=				SECONE	CLASS			
Station Numbers						337	• from	Effective April 28, 1957	aph Calls	• from	SIGNS	338					
Station	Sidings	Other Tracks				Daily Ex. Sat. and Sunday	Distance Rutiand	STATIONS	Telegro	Distance Forbes		Daily Ex. Sat. and Sunday					
E92	50	35				L . OAm		RUTLAND, N. D	RJ	63.03	RDXKB	A 4.55Pm					
							0.27	FORBES LINE JCT	• • • • •	62.76	נאא						
E110	•••••	34				s12.01Pm	18.91	STRAUBVILLE	····	44.12		s 4.05			• • • • • • • • • • • • • • • • • • • •		
							29.77	10.86C. & N. W. RY. CROSSING		33.26							
E126	• • • • •	34				s12.38	35.01	5.24 GUELPH	GU	28.02	D	s 3.25					
E134	• • • • •	35				£12.53	42.10	7.09 SILVER LEAF	••••	20.93		f 3.05					
	• • • • •	• • • • •					49.42	.C. M. ST. P. & P. RY. CROSSING.		13.61							
E141	• • • • •	55				s 1.20	49.65	ELLENDALE	N	13.38	D.	в 2.45	[
E155	Yard	103				A 1.55Pm	63.03	FÖRBES	FO	•••••	RDXY	L 2.10 _{Pm}					
						2.45 22.92		Time Over Subdivision Average Speed Per Hour			·	2.45 22.92					

Westward trains are superior to eastward trains of the same class.

SEE ADDITIONAL SPECIAL INSTRUCTIONS PAGES 15 THROUGH 23.

ALL SUBDIVISIONS

1. SPEED RESTRICTIONS GENERAL.

(a) Where Automatic Block and Interlocking Rules and Signal Indications require movement at RESTRICTED SPEED, such movement must be made prepared to stop short of train, obstruction, or switch not properly lined and on the lookout for broken rail or anything that may require the speed of a train to be reduced; but not exceeding 15 MPH or as much slower as necessary; and where conditions require the movement must be controlled so stop can be made in time to avoid accident.

(b) Maximum permissible speed of passenger, freight and mixed trains will be designated by distinctive reflectorized roadway signs set in an upward angle of 45 degrees.

Except as directly affected by speed restrictions prescribed in Item 1—ALL SUBDIVISIONS—and other speed restrictions covered by Item 2 under individual Subdivisions, the 45 degree signs designate zone speed territories and the numerals thereon indicate in miles per hour the maximum permissible speed which will govern until the next zone sign is reached.

When the movement is from a higher to a lower speed zone, the zone sign is located approximately one mile from the point where the lower speed becomes effective. At the end of this one mile is located a reflectorized angular Restricting Sign, yellow background with black stripes, indicating the point where lower speed becomes effective. Lower speed to govern until entire train passes next zone sign.

When the movement is from a lower to a higher speed zone, the 45 degree sign is located at the point where speed may be increased.

This does not modify Rule 93. Further, trains and engines operating under the above conditions must not exceed the maximum permissible speed prescribed by the 45 degree signs with the current of traffic.

The 45 degree sign has two sets of figures. The numerals preceded with letter "P" apply to passenger trains, and letter "F" to freight and mixed trains.

(c) When passenger trains are handled by Diesel or Electric engines, passenger or freight steam engines, the train will not exceed the maximum speed authorized by Speed Limit Plate on engine, and will he governed by the 45 degree signs where a lower speed is prescribed.

When freight cars, except cars equipped with steel wheels, air signal and steam heat lines, are handled in passenger trains, the train will not exceed maximum permissible speed for freight trains in the territory operated.

(d) Speed shown on Speed Limit Plate on engines must not be exceeded.

(e) Steam engines backing up _______ 20 MPH
Steam engines in forward motion running light or with
caboose only _______ 35 MPH
Diesel and Electric engines light or with caboose only. 50 MPH
When cabooses are handled in passenger service trains

will not exceed speed of:
when handling cabooses X-100, X-198 to X-310..... 65 MPH
cabooses X-330 to X-749 50 MPH

Trains handling, not in actual service, derricks, pile drivers, ditchers, cranes, shovels, Jordan Spreaders, wedge plows, etc. on Main Lines 30 MPH

Trains handling ore cars or air dump cars loaded with ore or gravel and scale test car on Main Lines..... 30 MPH except on 6 degree curves or sharper, and on Branch Unless conditions require a further speed restriction, trains or engines, moving against the current of traffic on double track through interlockings 15 MPH Trains or engines moving on main routes actuating points of spring switches 35 MPH Trains or engines moving in facing point direction at spring switches without facing point lock 25 MPH Trains or engines through No. 20 turnouts 35 MPH End of double track at: Delano, two miles west of Atwater, Pennock and Campbell. Crossovers at: Two miles east of depot at Delano. Two miles west of depot at Atwater. Montrose and Waverly siding east and west switches. Howard Lake, east and west switches. Cokato, east and west switches. Dassel, east and west switches of control siding. Darwin, east siding switch. Litchfield, east switch of control siding. Grove City, west switch of control siding. Atwater, east switch of control siding. Kerkhoven, east and west switches. Benson, east switch of eastward siding. Hancock, end of eastward freight track. Morris, end of eastward freight track. Donnelly, east and west switches. Herman, east and west switches. Norcross, east and west switches. Robbinsdale, east and west switches. Sioux City, east switch 26th Street Yard.

On single track, trains containing such cars must be at stop when on siding or adjacent track when meeting or being passed by other trains, except when there are more cars than siding will hold, it is permissible for such train to pull by other train at restricted speed.

2. MOVEMENT OF ENGINES DEAD IN TRAINS.

Class O and larger engines will be placed not to exceed 15 cars behind road engine.

Class C-1 and smaller engines will be placed next ahead of caboose.

Diesel and Gas-Electric engines 2303-2350 must be handled on rear of train.

Not less than five cars will be placed between steam engines moving dead in train.

Switcher and road switcher type Diesel engines G.N. numbers 1 through 232, and 600 through 711, moving dead in freight trains are to be handled near rear of train and behind helper engines. Where more than one unit is moved such units must be separated by a freight car.

When towing multiple unit road type Diesel engines dead in freight trains, not more than four adjacent units are to be towed in a single grouping, separated from the road engine and additional groups by not less than five cars. Trains handling Great Northern steam engines dead in train with side rods on both sides will not exceed 40 MPH; and without side rods will not exceed 10 MPH.

Trains handling foreign line steam engines with side rods on both sides will not exceed speed designated by Superintendent; and without side rods will not exceed 10 MPH.

Engines that have any of the truck or driving wheels removed will not be moved in a train without authority of Superintendent. Trains handling Electric, Diesel and Gas-Electric engines in tow dead in train will not exceed following speeds:

1 to 28, 75 to 170	МРН
4 M Y 1 000 01 1 1 0 1 1 1 1 1 1 1 1 1 1 1	
175 to 232, 247 to 251, 253 to 259, 262, 263, 271 to	
274, 276 to 279, 307 to 317, 400 to 474, 550 to	
583, 600 to 678, 681 to 711	MPH
260, 261, 266 to 270, 275, 280, 281, 350 to 365, 500 to	
512, 679, 680 75 N	\mathbf{MPH}
2303 to 2324 50 M	MPH
2325 to 2350	MPH
5000 to 5008 45 N	мрн
5010 to 5019	

3. Before leaving any engine terminal enginemen will make proper tests and inspections of water glasses, gauge cocks, water column and injectors, and will not leave the terminal unless all these are in proper working order.

Should enginemen on steam engines find that the water is not in sight in water glasses, and if water cannot be raised to bottom gauge cock or water glass by opening throttle, on oil burning engines the fire must be extinguished immediately and on coal burning engines the fire must be knocked out or smothered to the extent there will be no damage done to the crown sheet. If water can be raised to the bottom gauge cock or water glass the water level should be built up by use of the pump, or injector, or both.

Should the low water alarm whistle blow, on any engine so equipped, enginemen will immediately ascertain where the water level is in the boiler by blowing out water glasses and water column, and being sure that water glass mounting valves are open and if water cannot be raised to the bottom gauge cock or water glass by opening throttle, enginemen will be governed by instructions in the preceding paragraph.

- 4. Under Rule 24, engine number only will be displayed in indicators on engines so equipped. This will also apply when our engines are operating over Northern Pacific Tracks. Between Klamath Falls and Chemult, Southern Pacific Rules will govern.
- 5. When two or more Diesel or Electric engine units are coupled together the numerals and suffix letter, where provided, of the leading unit will be illuminated at all times when in service.

The numerals and suffix letter of trailing units must not be illuminated.

The numerals and suffix letter of the leading unit only will be used in train orders as prescribed by Consolidated Code Rule 206.

- Gas-Electric engines must not be fueled while occupied by passengers, or coupled to cars occupied by passengers.
- 7. Air hose on engines must be hooked up in hose fastener when not in use.
- 8. EMPLOYES WILL BE GOVERNED AS FOLLOWS ON ENGINES, PASSENGER AND FREIGHT CARS EQUIPPED WITH ROLLER BEARINGS:

Roller bearing failures on cars or engines equipped with roller bearing journal boxes may be due to lack of oil or grease. If the box is not blazing, the oil plug in the cover should be removed and engine or valve oil added. Oil must never be added to a box that is blazing. Grease lubricated roller bearing boxes have grease plugs locked with metal strap which must be cut off

with chisel before plug can be removed. After the oil has been added and plug replaced, the train should proceed at reduced speed and care exercised until it is apparent that the box will run cool. If fire develops in roller bearing box on any equipment, it must be closely watched, train moved slowly, and Superintendent notified from first available point of communication, who will prescribe for the movement.

Some engines and cars equipped with roller bearings have heat indicators or stench bombs inserted in the housing of boxes which release a strong pungent odor in the event of excessive journal box temperatures. When this odor is detected, train must be stopped at once and box located. Compare the temperature of this box with the other boxes on the same engine or car, check the oil level, and if there is no evidence of overheating, train may proceed, but if the box is overheating proceed only as instructed in the preceding paragraph.

Cars and engines equipped with roller bearings must not be allowed to stand alone, even on level track, without brakes being adequately applied.

9. COOLING AND STEAM BOILER WATERING FACILITIES FOR DIESEL ENGINES ARE PROVIDED AT THE FOLLOWING INTERMEDIATE STATIONS:

SECOND SUBDIVISION

WILLMAR—At passenger depot.
MORRIS—In frost box at west end depot platform.

THIRD SUBDIVISION

MONTICELLO—In pump house at water tank. ST. CLOUD—In frost box at depot.

SEVENTH SUBDIVISION

GARRETSON—In frost box east of depot. MARSHALL—In service building east of depot.

- 10. Under Rule 2, watches that have been examined and certified to by a designated inspector must be used by train dispatchers and yardmen.
- 11. Brakemen with less than one year of experience should not be used as flagman except in emergency, and then Superintendent will be notified by wire.
- 12. When operating snow machines in non-block signal territory, no train should be permitted to follow closer than a station apart; when that can not be done, they will be blocked not less than thirty minutes apart.
- 13. After severe blizzard or dirt storm, employes on first train over road must exercise care to avoid accident caused by striking drift without first having drifts faced with hand shovels, cutting in far enough to get beyond the hard snow and giving a perpendicular wall to strike against instead of slope or wedgelike shape. When operating snow dozer, conductor in charge will ride in the dozer. On snow and dirt dozers every precaution must be taken to see that cage, flangers and wings clear all obstacles when in service and are properly secured when in through trains, and dozers properly turned. Hand screws must be tightened to raise flanger on dozers as high as possible before making a back-up movement, and must not be released until the dozing work is actually to start. Hand screws holding the cage on dozers must be tightened or chains otherwise fastened except when dozer has air in cylinders and is attended by an employe.
- 14. Loaded dump cars should not be handled on double track after dark, but if necessary to do so, close watch must be kept by trainmen and if a car dumps its load, train must be stopped and protection afforded on the opposite track.

- 15. Unless otherwise provided when passenger trains are operated against current of traffic on double track or through sidings, conductors shall notify Railway Postal Clerks, train shall stop at points where U. S. mail is usually picked up and conductors are responsible for delivery of mail to Postal car.
- 16. Conductors will report by wire all flat spots on wheels of passenger cars. Any cars having flat spots on wheels of more than two and one-half inches long must be set out.
- 17. Engineers finding flat spots on Diesel engines in excess of two and one-half inches will immediately notify Superintendent, who will prescribe for their movement.
- 18. Due to limited overhead clearance at tunnels and structures, employees are warned to keep off top of cars of extreme height and width when handled in trains and yards, also such standing cars in electrified zone, except in emergency. In absence of previous advice on such cars, wire proper officer for instructions.
- 19. The Railway Company is responsible for proper handling of perishable freight on road and at points where Western Fruit Express Company do not maintain representatives. Conductors on trains handling perishable freight will ascertain from waybills class of service required and light or extinguish heaters and manipulate vents in accordance with current instructions provided for handling perishable freight issued by the National Perishable Freight Committee.
- 20. Placarded loaded tank cars handled in through freight trains shall not be nearer than 6th car from engine, occupied caboose or passenger car.

Cars placarded "Explosives", "Inflammable", "Corrosive Liquids", or "Poison Gas" handled in through freight trains, local and mixed trains, shall not be nearer than 16th car from engine, occupied caboose or passenger car.

When length of train will not permit handling of cars as prescribed above—ANY PLACARDED CAR, loaded with above commodities—shall be placed near middle of train, but not nearer than 2nd car from engine, occupied caboose or passenger car.

When switching such cars in terminal yards they must be separated from engine by at least one non-placarded car.

When placarded cars described above are handled in freight trains made up in "blocks" or classifications, placarded car or cars shall be placed near middle of the "block" or classification, but not nearer than 6th car from engine, occupied caboose or passenger car.

When such placarded cars are placed in trains they must not be placed next to each other, next to refrigerators equipped with gas-burning heaters, stoves or lanterns, or next to loaded flat cars, or gondola cars containing lading higher than ends of car that is liable to shift.

Carload express shipments of explosives, sealed and placarded, may be handled on passenger trains; LCL shipments may be made in so-called peddler car with messenger in charge when such car is assigned to the handling of express and baggage exclusively.

Terminal or pick-up points enroute must furnish conductor and engineer Form 250 showing consecutively location in train of all cars placarded "Explosives". At points other than terminals where crews change, notice will be transferred from crew to crew.

Employes will be guided by further instructions governing handling of loaded tank cars, Explosives, Inflammables, Corrosive Liquids, and Poison Gas found in I.C.C. Regulations and Consolidated Code Rules 726(C) and 808.

21. In Automatic Block Signal territory, the absence of the lunar light on a spring switch signal, Rule 501 E, page 114, of the Consolidated Code, will not be regarded as an imperfectly displayed signal, as prescribed by Rule 27, when the Automatic Block Signal governing movement over such switch indicates "Proceed." This does not modify Rule D524.

22. The normal position of a spring switch with facing point lock is identified by a color light type signal displaying a "lunar white" light for train or engine movements in a trailing point direction and for movements in facing point direction when conditions require.

The normal position of a spring switch without facing point lock is identified by a triangular yellow target on switch stand with letter "S" in black, and "lunar white" light in switch lamp in place of green light displayed in both directions through or over the switch.

Trains, departing from stations, either from siding or main track in trailing point movement actuating points of spring switches, a member of crew must observe indication of governing signal in opposite direction after rear end of train has passed through switch to ascertain if switch points return to normal position. If this signal indicates Stop and no immediate train movement or other cause is evident report the fact to Superintendent from first available point of communication.

During and immediately following snow storms or violent wind storms, spring switches must be operated by hand and relined to normal position before heading out through switch in trailing point movement, actuating switch points, to insure switch is in proper operating condition.

INDICATORS AT SPRING SWITCHES.

Spring switch indicators consisting of a red and yellow light unit or a single yellow light unit (all units normally dark) mounted on an iron mast is located at the clearance point of a siding. The switch-key-controller mounted on the mast must be operated by a member of the crew who, together with engineer, must observe and be governed by its indication before fouling main track or making movement from siding to main track through a spring switch in automatic signal territory, unless the movement is made immediately after an opposing train has passed the switch and Automatic Signal at leaving end of siding indicates "Proceed".

If Indicator displays a yellow light when switch-key-controller is operated, train or engine movement to main track may be made immediately in accordance with train rights and operating rules. Display of yellow light must continue until leading wheels have passed clearance point.

If Indicator does not display a yellow light when switch-key-controller is operated, train or engine movement to main track may be made in accordance with train rights and operating rules, after operating spring switch by hand waiting three minutes and taking every precaution to provide proper protection.

To operate Switch Indicator, insert switch key in controller and turn clockwise toward "R", hold a few seconds and remove key. If yellow light is displayed and intended movement is not made, insert switch key in controller and turn counter-clockwise toward "N" to restore signal system to normal condition to avoid delay to trains on main track.

Switch-key-controller must never be operated toward "N" after having been operated toward "R" if intended movement to main track is to be made.

- 23. Facing point locks on hand operated switches are indicated by a six inch yellow stripe painted on target staff. Be positive locking device is restored to normal position after using. A running switch must not be made through this type switch.
- 24. DRAGGING EQUIPMENT DETECTOR INDICATOR consists of a single white light unit (normally dark) with circular background mounted on signal or other mast. When white light is displayed, train must be stopped and inspected for dragging equipment. Notify Superintendent from first available point of communication.
- 25. Rule 204(A) prescribes that copies of train orders will be furnished the rear trainman, such orders will only be furnished on trains designated:

Nos. 3, 4, 7, 8, 9, 10, 27, 28, 31, 32 and sections thereof; also extra passenger train whether operated as section of regular train or as a passenger extra.

26. OSCILLATING EMERGENCY RED HEADLIGHT will be immediately displayed by day or night when a train is disabled or stopped suddenly by an emergency application of air brakes or when engineer and conductor find it necessary to stop train due to some defect which might cause accident, over-running clearance point at meeting and waiting points, end of double track or junction.

Engineer of an approaching train observing display of emergency red headlight must stop before passing and be governed by conditions existing. If operating on adjacent track, ascertain and if safe for passage, then proceed at restricted speed until

train is passed.

OSCILLATING EMERGENCY RED REAR END LIGHT is of two types—Automatic Control—Portable Manual Control—and except as otherwise provided, must be displayed by day or night each time train stops or is running at speed less than 18 MPH. Automatic Control type automatically functions in this manner. However, when train running at speed above 18 MPH and moving under circumstances in which it might be overtaken by another train or engine and during foggy and stormy weather, light may be operated manually with emergency switch and employes to afford other protection prescribed by rule.

THE USE OF EMERGENCY RED HEADLIGHT AND REAR END LIGHT DOES NOT IN ANY WAY RELIEVE ENGINE-MEN AND TRAINMEN FROM RESPONSIBILITY OF COM-

PLYING WITH RULES 99 AND 102.

Emergency red rear end light must be extinguished: when standing at origin and terminus stations of train run; when switching being performed from rear; when on siding to be passed by another train; and, when another train operating on adjacent track is approaching from rear, but not until it is known such train is not on same track.

Portable light must be removed before coupling to rear of such car.

Oscillating white light on engines will be displayed in addition to standard headlight governed by Rules 17 and 17(B). In case of headlight failure it can be used as emergency headlight or as a focus light by push button control if desired.

Enginemen and trainmen on trains and engines equipped with oscillating emergency red lights must familiarize themselves with the operation of the lights.

27. Rule D-97 is in effect on this division.

- 28. St. Paul Union Depot and Minneapolis, in order to facilitate the handling of patients arriving on cots in baggage cars and who require use of wheel chair or stretcher, conductors will wire Union Depot Company, St. Paul, or Stationmaster, Minneapolis, describing the class of service required.
- 29. Great Northern crews when making interchange on foreign line railway track will be governed by the rules and bulletins of such
- 30. This is authority to honor passes of tenant line railways' train and engine men between Twin Cities, except on Trains 31 and 32.
- 31. Arrangements have been made with the M. & St. L. Railway Company to honor interline tickets reading via that line from St. Paul on our trains from St. Paul to Minneapolis, and Conductors will honor all such tickets accordingly. All such tickets honored should be endorsed "Honored, G. N. St. Paul to Minneapolis", and make notation on Form and number of tickets honored in ticket report to Auditor Passenger Receipts.
- 32. AT WILLMAR JUNCTION.

After entering home signal limits on yard lead and freight track leading to the Sixth Subdivision, switching movements only may be made between these home signals and Rule 670 will not apply.

33. Rule 19 figures 2 to 9 inclusive, and Rule 19B are supplemented

When the rear car of a passenger train is equipped with built-in electric markers, or when the rear unit of an engine, moving light, is equipped with electric signal lamps, they must be lighted by day and by night to be considered as markers. The requirement for showing green to the front, or direction of movement, and green to the side will not apply.

The built-in electric markers, or electric signal lamps used as markers, must not be extinguished until the train has arrived at the final terminal of run, or is in the clear of the main track at the terminal and switch closed.

FIRST SUBDIVISION

(Main Line)

1. MAXIMUM PERMISSIBLE SPEED FOR TRAINS. Between Passenger Freight Lyndale Jct. and Willmar 79 MPH 50 MPH

2. SPEED RESTRICTIONS.

Delano No. 27 passing depot40 MPH

3. TRAIN REGISTER EXCEPTIONS. Wayzata, register only for Fifth Subdivision trains. Willmar, Nos. 31 and 32 will register by ticket.

- 4. CLEARANCE PROVISIONS AND EXCEPTIONS RULE 83(B). At Lyndale Jct., Hutchinson Jct., trains for which these points are initial stations may proceed on authority of clearance under which such trains arrive, and at Lyndale Jct. only when train order signal indicates proceed.
- 5. Lyndale Jct., eastward freight trains on Willmar Line having cars to set out at this point will stop before passing eastward Home Signal to make set-out.
- 6. Crossings as herein shown at the following stations are equipped with automatic signals and switch controllers. When engines or cars are standing in circuit but crossing not fouled, signals must be cleared for highway traffic by operating controllers. When crossing is to be fouled, controllers must first be operated to set signals at stop position against highway traffic.

Long Lake, Crossing East of depot; and crossing two and one-half miles West.

Maple Plain, Budd Street, West of depot.

Dassel, 3rd & 4th Streets.

Litchfield, Miller, Sibley and Holcomb Avenues.

Atwater, Main Street crossing East of depot.

7. SPEED TEST BOARDS.

Engineers shall test speed of their trains passing following points as compared with Speed Table:

Westward trains, between MP 74 and MP 75 between Darwin and Litchfield.

Eastward trains, between MP 47 and MP 46 between Waverly and Montrose.

8. CROSSOVERS ON DOUBLE TRACK.

Facing Point	Trailing Point
	Mile Post 13400 feet west of.
	Mile Post 15400 feet west of.
	Mile Post 19700 feet west of.
Wayzata	Long LakeJust east of Depot.
•	Long LakeJust west of Depot.
Mile Post 37	Maple PlainJust east of Depot.
1600 feet east of	Mile Post 371600 feet east of.
	Just west of end of double track west of Atwater.
	KandiyohiJust east of Depot.

9. INSTRUCTIONS GOVERNING OPERATION OF TRAIN AND ENGINES WITHIN CENTRALIZED TRAFFIC CONTROL SYSTEM.

CTC extends between M.P. 36.7 about 2 miles east of depot Delano and Willmar Jct. Interlocking.

Double track extends between Lyndale Jct. and just west of depot Delano and between M.P. 91.1 about 2 miles west of depot Atwater and Willmar.

Willmar is the control station for the CTC under the supervision of train dispatcher.

Controlled sidings are located at:

Montrose-Waverly
Howard Lake
Cokato
Dassel—South of main track.
Litchfield—South of main track.
Grove City
Atwater

Non-controlled sidings are located at:

Delano—South of eastward main track, cap. 80 cars.

Dassel—North of main track, cap. 79 cars. Darwin—Cap. 47 cars.

Litchfield-North of main track, cap. 106 cars.

Switches of non-controlled sidings are hand operated and equipped with electric locks. Before using non-controlled siding permission must be obtained from train dispatcher.

All main track switches within CTC, except switches at controlled sidings, are hand operated and equipped with electric locks governed by Rule 283.

The following signals are located adjacent to the left of the track which they govern:

EASTWARD AGAINST THE CURRENT TRAFFIC

Signal 92.6

Eastward governing home signal end of double track Atwater.

Eastward governing home signal at west crossover east of Delano.

WESTWARD AGAINST THE CURRENT TRAFFIC Signal 100.3

SINGLE TRACK-EASTWARD MOVEMENTS Signal 89.6

Governing home signal east siding switch Atwater.

SIDING AT ATWATER-WESTWARD MOVEMENTS Westward governing home signal.

SECOND SUBDIVISION

(Main Line)

1. MAXIMUM PERMISSIBLE SPEED FOR TRAINS.

2. SPEED RESTRICTIONS.

Morris, on eastward freight track between Browns Valley Line Jct. and coal shed crossover west of depot, all trains and engines must move at restricted speed.

3. TRAIN REGISTER EXCEPTIONS.

Willmar, Nos. 31 and 32 will register by ticket.

Benson, register only for trains originating and terminating. Campbell, register for 12th Subdivision trains only. All 12th Subdivision trains will require clearance at Campbell.

Register of regular trains at Willmar will cover their arrival at Pennock.

Register of regular trains at Breckenridge will cover their arrival at Campbell.

4. CLEARANCE PROVISIONS AND EXCEPTIONS RULE 83(B).

At Sioux City Line Jct., Watertown Line Jct., Browns Valley Line Jct., trains for which these points are initial stations may proceed on authority of clearance under which such trains arrive.

- 5. Long siding north of main track extending east of Benson is an EASTWARD SIDING. Westward trains must not use this siding unless authorized by train order.
- 6. Track south of main track between Hancock and west switch Morris located 1.55 miles west of depot is known as EASTWARD FREIGHT TRACK and must be used by eastward trains only, except first class, unless otherwise instructed by train order.

All trains using this track will display markers as though running against the current of traffic on double track and will comply with Rule 93 within yard limits, also Rule 99 between East yard limit board Morris and Hancock.

When a train is given right over an opposing train to the end of the EASTWARD FREIGHT TRACK at either Hancock or Morris and the opposing train has not arrived at the point last named in the order, the train thus given right is not required to wait for the opposing train and will proceed on its regular track but must not go beyond the other end of the EASTWARD FREIGHT TRACK unless the second named train has arrived or is directed by train order to do so, or when time-table authority will permit movement beyond.

Fourth Subdivision trains, after securing permission from dispatcher, will use EASTWARD FREIGHT TRACK between Browns Valley Line Jct. and crossover just west of Morris depot.

7. Morris, crossover located at 7th Street is known as 7TH STREET CROSSOVER.

8. SPEED TEST BOARDS.

Engineers shall test speed of their trains passing following points as compared with Speed Table:

Westward trains between MP 117 and MP 118 between Kerkhoven and Murdock.

Eastward trains between MP 187 and MP 186 between Charlesville and Norcross.

9. CROSSOVERS ON DOUBLE TRACK.

Trailing Point
Doranjust east of depot

10. SPRING SWITCHES WITH FACING POINT LOCK.

Benson, west switch eastward siding. west switch westward siding.

Clontarf, west siding switch.
Hancock, end of eastward freight track.
Donnelly, east and west siding switch.
Norcross, east siding switch.
Tintah, east and west siding switch.
Normal position is for main track.

11. MANUAL INTERLOCKINGS.

12. MANUAL INTERLOCKINGS WITH DUAL CONTROL SWITCHES.

Benson, 2.51 miles east of depot....east switch of eastward siding Morris, 1.55 miles west of depot....west switch eastward freight track.

These switches are electrically controlled by operator at the depot.

13. AUTOMATIC INTERLOCKINGS.

14. SEMI-AUTOMATIC INTERLOCKINGS.

Hancockend of eastward freight track Interlocking operates automotically except movement of westward trains from single track to eastward freight track requires hand operation of spring switch.

If a westward train or engine is stopped by a Stop-Indication of the governing home signal and no conflicting train movement is evident, it may proceed in accordance with train right and operating rules after making certain switch is properly lined for the movement.

If an eastward train or engine on either track is stopped by a Stop-Indication of the governing home signal and no conflicting train movement is evident, a member of crew must consult the operator and be governed by his instructions. For further information, see instructions posted at depot.

Dwarf automatic block signal located near west siding switch governs movements to main track. Main track switch must be lined for siding to obtain other than "Stop and Proceed" indication which in no manner modifies Rule 5.13. This signal does not determine position of industry track switch.

15. Crossings as herein shown are equipped with automatic crossing signals and switch controllers. When engines or cars are standing in circuit but crossing not fouled, signals must be cleared for highway traffic by operating controllers. When crossing is to be fouled, controllers must first be operated to set signals at stop position against highway traffic.

Pennock, Highway crossing just West of Depot. Kerkhoven, 9th Street crossing East of Depot. Norcross, Highway crossing just West of Depot.

Tintah, Highway crossing West of Depot.

Doran, Crossing about one-fourth mile East of Depot.

16. Westward Twelfth Subdivision trains will require M.St.P.&S.S.M. Ry. clearance at Campbell.

THIRD SUBDIVISION

(Osseo Line)

1. MAXIMUM PERMISSIBLE SPEED FOR TRAINS.

Between Passenger Freight Lyndale Junction and St. Cloud 75 MPH 50 MPH

2. SPEED RESTRICTIONS.

Bridge 50.3, Clearwater, O-8, Q-1, R, S-1, N-3 10 MPH Sharp curve just west of Bridge 50.4, Clearwater,

3. TRAIN REGISTER EXCEPTIONS. Lyndale Jct., all trains register by ticket. St. Cloud, Nos. 11 and 12 will register by ticket.

4. CLEARANCE PROVISIONS AND EXCEPTIONS RULE 83(B). At Lyndale Jct., trains for which this point is initial station may proceed on authority of clearance under which such trains arrive when train order signal indicates proceed.

Crossings as herein shown are equipped with automatic crossing signals and switch controllers. When engines or cars are standing in circuit but crossing not fouled, signals must be cleared for highway traffic by operating controllers. When crossing is to be fouled, controllers must first be operated to set signals at stop position against highway traffic.

St. Cloud, 3rd Street North. Monticello, Pine Street and Elm Street. Robbinsdale, 42nd Street west of depot.

6. Track north of main track extending approximately 2 miles eastward from depot, St. Cloud, is known as LONG LEAD and must be kept clear for meeting and passing of trains.

7. SPRING SWITCHES WITH FACING POINT LOCK.

Robbinsdale, east and west siding switch. Osseo, east and west siding switch. Rogers, east and west siding switch. Albertville, east and west siding switch.

Monticello, east and west siding switch. Clearwater, east and west siding switch. Normal position is for main track.

8. MANUAL INTERLOCKINGS.

Robbinsdale, 1.34 miles west of.......MStP&SSM. RR. crossing

9. AUTOMATIC INTERLOCKINGS.

Lyndale Jct., 0.76 miles west ofM.W. Ry. crossing

10. Industry tracks at the following stations are restricted for use of engines larger than O-4 class. Robbinsdale, Osseo, Rogers, Albertville, Monticello, Clearwater.

11. Robbinsdale.

All movements on industry track over Noble Avenue Crossing must be protected by flagman.

FOURTH SUBDIVISION

(Browns Valley Line)

1. MAXIMUM PERMISSIBLE SPEED FOR TRAINS.

Diesel or Gas-Electric Freight Passenger 25 MPH

Morris and Browns Valley 30 MPH

2. CLEARANCE PROVISIONS AND EXCEPTIONS RULE 83(B). At Browns Valley Line Jct., trains for which this point is initial station may proceed on authority of clearance under which such trains arrive.

FIFTH SUBDIVISION

(Hutchinson Line)

1. MAXIMUM PERMISSIBLE SPEED FOR TRAINS.

Diesel or

Gas-Electric Freight Passenger

25 MPH

Hutchinson Jct. and

Between

Hutchinson 35 MPH

2. CLEARANCE PROVISIONS AND EXCEPTIONS RULE 83(B). At Hutchinson Jct., trains for which this point is initial station may proceed on authority of clearance under which such trains arrive.

3. SWITCH INDICATORS.

Hutchinson Jct. indicator is located near hand operated junction switch. Push buttons and instructions for their operation are in the iron box locked with a switch lock.

4. Crossing as herein shown is equipped with automatic crossing signals and switch controllers. When engines or cars are standing in circuit but crossing not fouled, signals must be cleared for highway traffic by operating controllers. When crossing is to be fouled, controllers must first be operated to set signals at stop position against highway traffic.

St. Bonifacius, Highway crossing of Trunk Highway No. 7.

SIXTH SUBDIVISION

2. SPEED RESTRICTIONS.

Between Home Signals of Interlockings at: 20 MPH Rice Jct.
Paynesville.

3. TRAIN REGISTER EXCEPTIONS.

St. Cloud, Nos. 11 and 12 will register by ticket.

CLEARANCE PROVISIONS AND EXCEPTIONS RULE 83(B).
 (a) At Rice Jct., a proceed indication on the eastward home signal will authorize Dakota Division eastward trains to proceed to St. Cloud without a clearance.

(b) At Willmar Jct., trains for which this point is initial station may proceed on authority of clearance under which such

trains arrive.

5. MANUAL INTERLOCKINGS WITH DUAL CONTROL SWITCHES.

Rice Jct. junction switch to Dakota Division This switch is electrically controlled by operator at the depot, St. Cloud.

6. AUTOMATIC INTERLOCKINGS.

Paynesville, 0.76 miles west ofMStP&SSM. RR. crossing

 Industry tracks at the following stations are restricted for use of engines larger than O-4 class. Rockville, Cold Spring, Richmond, Paynesville, New London Company gravel pit, New London, Spicer.

SEVENTH SUBDIVISION

(Main Line)

1. MAXIMUM PERMISSIBLE SPEED FOR TRAINS.

Diesel or Gas-Electric

Between Passenger Willmar and Garretson 55 MPH 40 MPH
2. SPEED RESTRICTIONS.

Between Home Signals of Interlockings at: 20 MPH Clara City.
Hanley Falls.

Garretson, within city limits 20 MPH

- 3. CLEARANCE PROVISIONS AND EXCEPTIONS RULE 83(B). At Sioux City Line Jct., trains for which this point is initial station may proceed on authority of clearance under which such trains arrive.
- 4. Pipestone, trains and engines using CRI&P main track between G.N. interchange track switch and east end of CRI&P siding, must move at restricted speed, and must be governed by current operating rules and time table of CRI&P Ry.

 no conflicting movement on CMStP&P track, and will hold this set up for a period of approximately four minutes, after which, if route is not used, automatic interlocking control can be taken away by CMStP&P trains or engines approaching crossing. If an eastward train occupies main track at depot for meeting trains or station work for a period in excess of four minutes, trainman must operate push button at depot or at crossover switches to obtain interlocking route. If an eastward train occupies main track between eastward approach and home signals for a period in excess of four minutes, trainman must operate push button at east siding switch or on home signal to obtain interlocking route. Push button boxes must be kept closed and locked except when in use.

6. SEMI-AUTOMATIC INTERLOCKINGS.

7. Maynard. Crossing just East of depot equipped with automatic crossing signals and switch controllers. When engines or cars are standing in circuit but crossing not fouled, signal must be cleared for highway traffic by operating controller, when crossing is to be fouled, controller must first be operated to set signals at stop position against highway traffic.

8. SPEED TEST BOARDS.

Engineers shall test speed of their trains passing following points as compared with Speed Table:
Westward trains, between MP 7 and MP 8 between Priam and Raymond.

Eastward trains, between MP 121 and MP 122 between Jasper

and Sherman.

EIGHTH SUBDIVISION

(Main Line)

1. MAXIMUM PERMISSIBLE SPEED FOR TRAINS.

Diesel or

Gas-Electric

Between Garretson and Sioux City 55 MPH 40 MPH

2. SPEED RESTRICTIONS.
I. C. RR. Crossing, 2.89 miles east of Sioux City 10 MPH

Between Home Signals of Interlockings at: 20 MPH

Booge.
Hills.
Wren Tower.

- Normal position is clear for Great Northern.

 6. Garretson. Crossing at Dowes St. equipped with automatic crossing signals and switch controllers. When engines or cars are standing in circuit but crossing not fouled, signal must be cleared for highway traffic by operating controller, when crossing is to be fouled, controller must first be operated to set signals at stop position against highway traffic.
- 7. SPEED TEST BOARDS.
 Engineers shall test speed of their trains passing following points as compared with Speed Table:
 Westward trains, between MP 134 and MP 135 between Booge and C.St.P.M.&O. Ry. crossing.
 Eastward trains, between MP 208 and MP 209 between Merrill and Wren Tower.

NINTH SUBDIVISION

(Yankton Line)

4	B# A WIB#III#	PERMISSIBLE	O D T T T		Mm
	MAXIMUM	PERMISSIBLE	SPEED	H() N	TRAINS
				1 01	TIVALIVO.

 •	~11	T 1/2-11/0+
		Diesel or
	G	as-Electric
	1	Paggaran

•	Gas-Tiectife	
Between	Passenger	Freight
Garretson and Sioux Falls		30 MPH
Sioux Falls and Volin	. 40 MPH	25 MPH
Volin and Mission Hill	. 25 MPH	25 MPH
Mission Hill and Yankton	40 MPH	25 MPH
SPEED RESTRICTIONS.		

2.

Yankton, CMStP&P RR. crossing	
C&NW. Ry. crossing	10 MPH
Between Home Signals of Interlockings at:	20 MPH
Sioux Falls	

Lennox. Davis.

Garretson, Nos. 51 and 52 will run at restricted speed within vard limits.

- CLEARANCE PROVISIONS AND EXCEPTIONS RULE 83(B). Great Northern clearance issued to No. 293 at Volin and No. 294 at Yankton will clear train at G. N. Jct. and C. & N. W. Jct., respectively.
- Sioux Falls, train and engine movements over Sixth and Eighth Street crossings will be protected by assigned watchmen between the hours of 5:00 A.M. and 9:00 P.M. daily, except Sunday. All train and engine movements over these crossings must be protected by a member of the crew on the ground at the crossing in advance of the movement outside of assigned hours of watch-

5. AUTOMATIC INTERLOCKINGS.

Sioux Falls, 3.96 miles east of	CStPM&O. Ry. crossing
Lennox, 0.21 miles west of	CMStP&P. RR. crossing
Davis, 3.54 miles west of	C&NW. Ry. crossing

6. RAILROAD CROSSINGS PROTECTED BY GATES.

Yankton,	0.58 0.88	miles miles	east of	 C&NW.	Ry. crossing

Normal position is clear for Great Northern. 1.41 miles east of _____CMStP&P. RR. crossing

Normal position is stop for Great Northern.

TENTH SUBDIVISION

(Watertown Line)

1. MAXIMUM PERMISSIBLE SPEED FOR TRAINS.

Gas-Electric

Between Passenger Freight Sioux Falls and Watertown 35 MPH 25 MPH

2. SPEED RESTRICTIONS.

- 3. CLEARANCE PROVISIONS AND EXCEPTIONS RULE 83(B). At W. & S. F. Jct., Sioux Falls Jct., trains for which these points are initial stations may proceed on authority of clearance under which such trains arrive.
- Sioux Falls, train and engine movements over Sixth and Eighth Street crossings will be protected by assigned watchmen between the hours of 5:00 A.M. and 9:00 P.M. daily, except Sunday. All train and engine movements over these crossings must be protected by a member of the crew on the ground at the crossing in advance of the movement outside of assigned hours of watchmen.
- 5. AUTOMATIC INTERLOCKINGS.

6. RAILROAD CROSSINGS PROTECTED BY GATES. Normal position is clear for Great Northern.

ELEVENTH SUBDIVISION

(Huron Line)

1. MAXIMUM PERMISSIBLE SPEED FOR TRAINS.

	Between Benson and Grover		Freight 30 MPH 25 MPH
•	SPEED RESTRICTIONS. Between Home Signals of Interlockings a Appleton.	t:	20 MPH
	Huron. Watertown, within city limits		6 MPH
	TRAIN REGISTER EXCEPTIONS.		

Watertown, all trains register and receive clearance.

4. CLEARANCE PROVISIONS AND EXCEPTIONS RULE 83(B). At Watertown Line Jct., trains for which this point is initial station may proceed on authority of clearance under which such trains arrive.

5. AUTOMATIC INTERLOCKINGS.

TWELFTH SUBDIVISION

(Aberdeen Line)

1. MAXIMUM PERMISSIBLE SPEED FOR TRAINS.

	Diesel or	
	Gas-Electric	
Between	Passenger	Freight
Soo Line Jct. and Milepost 55 R	utland 40 MPH	35 MPH
Milepost 55 and Aberdeen	40 MPH	25 MPH
-		

2. SPEED RESTRICTIONS.

Between Home Signals of Interlocking at Aberdeen 20 MPH

3. AUTOMATIC INTERLOCKINGS.

4. Westward Twelfth Subdivision trains will require M.St.P.&S.S.M. Ry. clearance at Campbell.

THIRTEENTH SUBDIVISION

(Forbes Line)

1. MAXIMUM PERMISSIBLE SPEED FOR TRAINS.

Diesel or Gas-Electric Between Passenger Freight 25 MPH

- 2. CLEARANCE PROVISIONS AND EXCEPTIONS RULE 83(B). At Forbes Line Jct., trains for which this point is initial station may proceed on authority of clearance under which such trains arrive.
- 3. Employees on 13th Subdivision will arrange to make watch comparison with Dispatcher through Agent at Rutland, having Agent sign comparison card. Watches must be presented to an official watch inspector during the month of August for regular annual inspection.

WATCH INSPECTORS


H. W. Anderson, 1578 University Ave., St. Paul, Minn. Herbert B. Christensen, Inc., 144 E. 5th Street, St. Paul, Minn. A. T. Veilleux, 894 Rice Street, St. Paul, Minn. Kavchar Jewelry, 2213 Central, Minneapolis, Minn. Olson Jewelry Co., 211 East Hennepin Ave., Minneapolis, Minn. Oscar P. Gustafson Co., 404 Nicollet Ave., Minneapolis, Minn. Pomerleau & Son, 227 East Hennepin Ave., Minneapolis, Minn. R. F. Berens & Son, 20 East Lake Street, Minneapolis, Minn. Weber Jewelry & Music Co., 714 St. Germain St., St. Cloud, Minn. Lundman's Jewelry, 210 West 4th Street, Willman, Minn. Paffrath & Son, 317 West 4th Street, Willmar, Minn. E. O. Kellenberger, 624 Atlantic Avenue, Morris, Minn. Nordahl Jewelry, 107 North 5th St., Breckenridge, Minn. Smith Jewelry Co., 225 So. Phillips Avenue, Sioux Falls, S. D. Brodkey & Goodsite, 400 4th St., Sioux City, Iowa. Grand Credit Jewelers, 627 4th Street, Sioux City, Iowa. Haugen Jewelry Co., Garretson, S. D. Fox Jewelry Co., Yankton, S. D. Delbert L. Gallet, Aberdeen, S. D. Haywoods Jewelry, Watertown, S. D.


SPEED TABLE


$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	Time Min.	Per Mil Sec.	e Miles Per Hour		Time Min.	Per Mile Sec.	e Miles Per Hour
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$					1		
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$					+		
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$		42			1	16	
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$		40	00.7		1	18	
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$		44	91.9	ll	1	20	
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$		40			1	22	48.9
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$		40	78.8	ll .	1	24	42.9
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$			70.0	ll	Ţ	26	41.9
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$		48	75.0	11	Ţ	28	40.9
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$		49	73.5		1	80	40.0
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$		ρŪ	72.0	1	1	33	38.7
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$		51	70.6	ll	1	36	37.5
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$		52	69.Z	ļļ.	Ī	39	36.4
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$		53	67.9		1	42	35.8
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$		54	66.7	ll .	1	45	34.8
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$		55	65.5		1	50	
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$		56	64.3		1	55	31.8
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$		57	63.2		2		30.0
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$		58	62.1	ll	2	10	27.7
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$			61.0	ļļ.	2	20	25.7
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	1	0		1	2	30	24.0
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	1	1	59.0		2	40	22.5
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	1	2	58.1	1	3		20. 0
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	1	3	57.1	ll	3	30	17.1
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	1	4	56.3		4		15.0
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	1	5	55.4	ll	5		12.0
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	1	6	54.5		6		10. 0
$\begin{array}{cccccccccccccccccccccccccccccccccccc$	1	7	53.7		7		8.6
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	1	8	52.9		8		
1 10 51.4 10 6.0	1		52.2	[]	9		
	1	10	51.4		10		6.0

BUSINESS TRACKS

NAME	LOCATION	Capac- ity Cars	Switch . Opens
Third Subdivision Tileston Mill Spur Crystal Lumber Co. Spur Oscar Roberts Co. Inc.	3.50 miles east of St. Cloud 1.56 miles west of Robbinsdale 1.57 miles east of Osseo	288 3 8	East West West
Fifth Subdivision Cox Bros. Spur	0.53 miles west of Spring Park	2	West
Sixth Subdivision Empire Quarry Spur North Star Granite Corp. Spur Cold Spring Granite Spur Gravgaard Spur New London Materials and Construction Co. New London Gravel Pit	5.01 miles west of Rice Jct 1.84 miles west of Hawick 3.01 miles west of Hawick	141 41 7 7 7	East West East E & W E & W
Steel Tanks Inc	1.25 miles east of New London	6 22	East East
Seventh Subdivision Readi-Mix and Oil Spur	0.58 mile west of Marshall	6	East
Crampton Spur	5.50 miles west of Corson	45 22 7	E & W West East

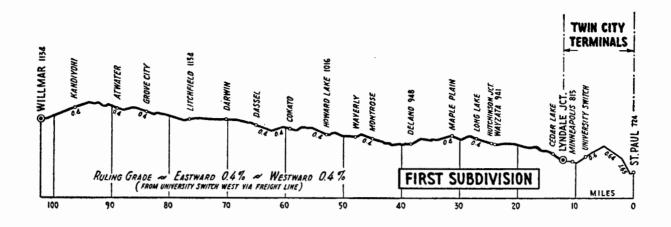

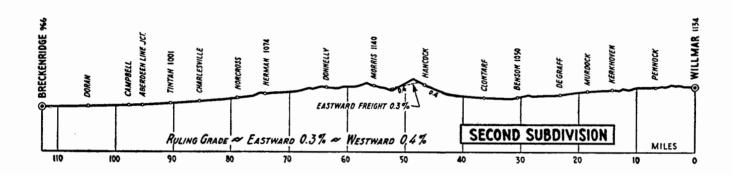

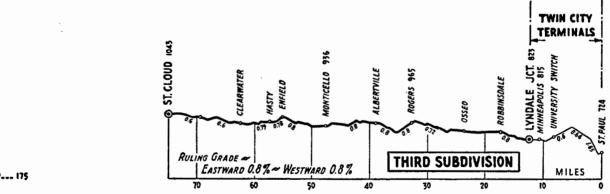

Elevation ... 175